

00-INDEX

WORK BY THE CUSTOMER: According to the document «SPECIFICATIONS FOR THE COMPLETE LIFTS».

07-HEADROOM

06-DOOR HOLE DETAIL

05-PIT LAYOUT

04-BEAM AND LIFTING HOOKS

03B-FIXING DETAILS IN HEADROOM


02-SIDE VERTICAL SECTION

01B-PLAN VIEW

01-PLAN VIEW

00-INDEX


F-1-602.rev.4

DRAWING	DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.		SHEET	
MP	2022	0	REFERENCE:		1/9	
MODEL LIFT:			MPFLEXMINILATERAL320S_EN			
MP FLEX MINI						
CAPACITY: [Nº PERSONS]		4	CLIENT:			
NOMINAL LOAD: [kg]		320	WORK SITUATION:			
SPEED: [m/s]		1				
STOPS: [Nº]		4				
FREQUENCY: [Hz]		50				
TENSION: [V]						
TRIFASICO.380V						

MP ASCENSORES

MP ASCENSORES


NB: It is essential to take into account the installation plans when assembling the guide rails, all the supports and specific components of EN 81-21 solution



DRAWING	DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.		SHEET	
MP	2022	0			2/9	
MODEL LIFT:			REFERENCE:			
MP FLEX MINI			MPFLEXMINILATERAL320S_EN			
CAPACITY: [Nº PERSONS]		4	CLIENT:			
NOMINAL LOAD: [kg]		320	WORK SITUATION:			
SPEED: [m/s]		1				
STOPS: [Nº]		4				
FREQUENCY: [Hz]		50				
TENSION: [V]						
TRIFASICO.380V						
MP ASCENSORES						

MP ASCENSORES

01B-PLAN VIEW

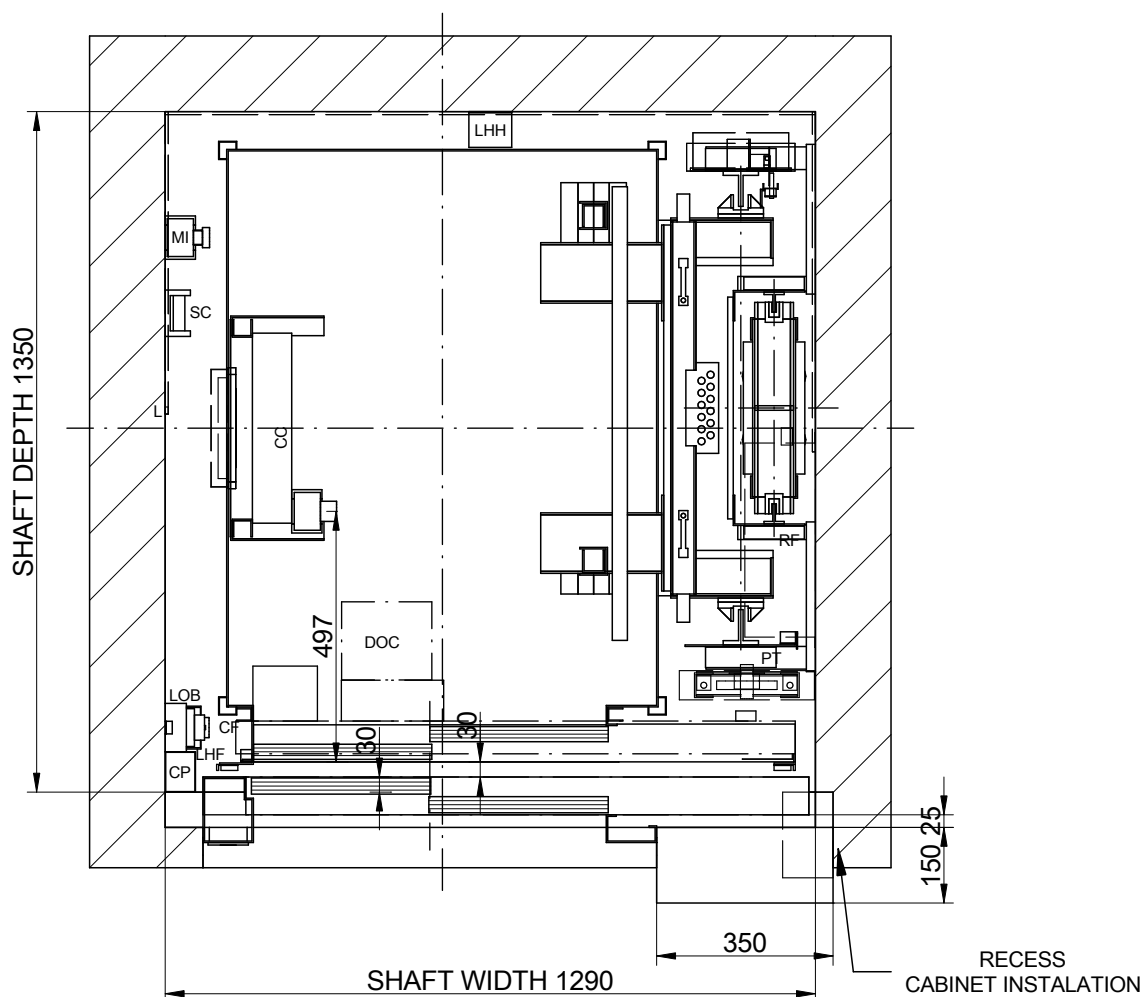

NOMENCLATURE


CP: Main trunking (or secondary)
 CC: Car ceiling connection box
 CF: Pit box
 CL: Shaft light switch
 DOC: Operator control box
 L: Lamp
 LOB: Pushbutton control board
 MI: Inspection control station
 PT: Fixed cam
 RF: Brake resistor
 ST: Stopping device
 SC: Travelling cable support

LHF: Indicator light of pit SAB2
 LHH: Indicator light of headroom SAB2
 SLSF/H: Limit switch in pit/headroom

SCALE[*]: 1:15

ELECTRIC CABINET
 ATTENTION: Foresee
 pockets
 for controller wiring exit.
 P=170 mm.

ELECTRIC CABINET Height= 2160 mm.
 WORK AREA [mm]= 500x700
 Cabinet located in floor level:

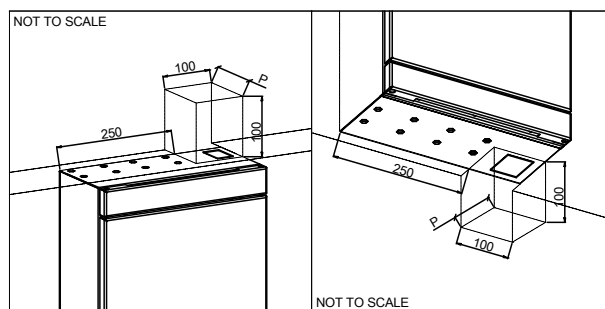


F-1-602.rev.4

DRAWING	DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.		SHEET	
MP	2022	0	REFERENCE:		3/9	
MODEL LIFT:			MPFLEXMINILATERAL320S_EN			
MP FLEX MINI						
CAPACITY: [Nº PERSONS]		4	CLIENT:			
NOMINAL LOAD: [kg]		320	WORK SITUATION:			
SPEED: [m/s]		1				
STOPS: [Nº]		4				
FREQUENCY: [Hz]		50				
TENSION: [V]						
TRIFASICO.380V						
MP ASCENSORES						

MP ASCENSORES

02-SIDE VERTICAL SECTION


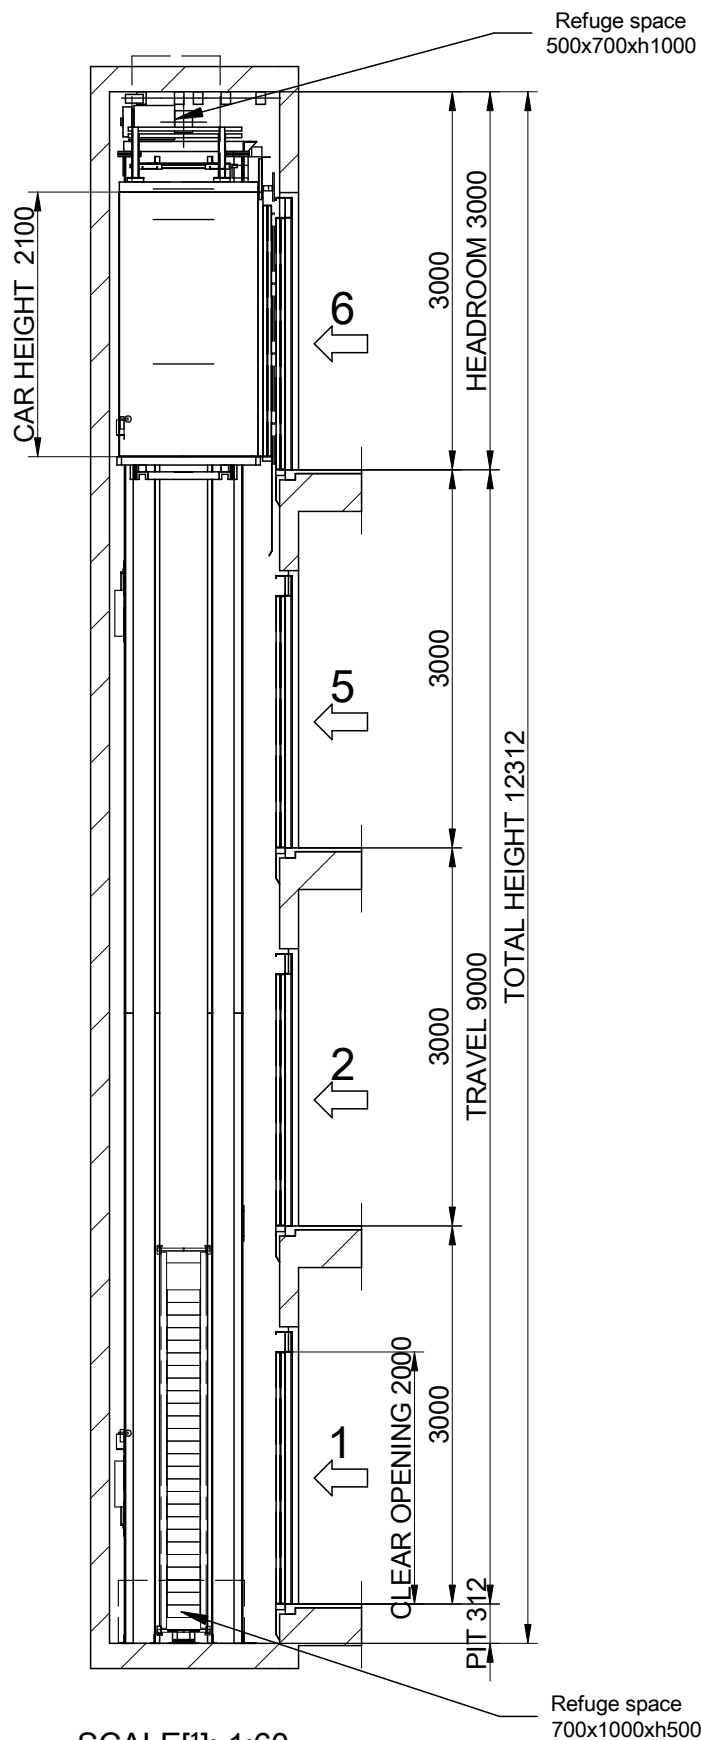



F-1-602.rev.4

DRAWING			DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.			SHEET
MP			2022	0				4/9
MODEL LIFT:					REFERENCE:			
MP FLEX MINI					MPFLEXMINILATERAL320S_EN			
CAPACITY: [N° PERSONS]					CLIENT:			
NOMINAL LOAD: [kg]					WORK SITUATION:			
SPEED: [m/s]								
STOPS: [N°]					4			
FREQUENCY: [Hz]					50			
TENSION: [V]								
TRIFASICO: 380V								
MP ASCENSORES								


Flat and levelled floor, protected against water leaking.
[EN81-20:2014 5.2.1.9]
Foresee pit access device
[EN81-20:2014 5.2.2.4]
Stop device
[EN81-20:2014 5.2.1.5.1. a]
Inspection control station.
[EN81-20:2014 5.2.1.5.1. b]
Power supply
[EN81-20:2014 5.2.1.5.1. c]
Light swicht
commuted with the cabinet.
[EN81-20:2014 5.2.1.5.1. d]

03B-FIXING DETAILS IN HEADROOM

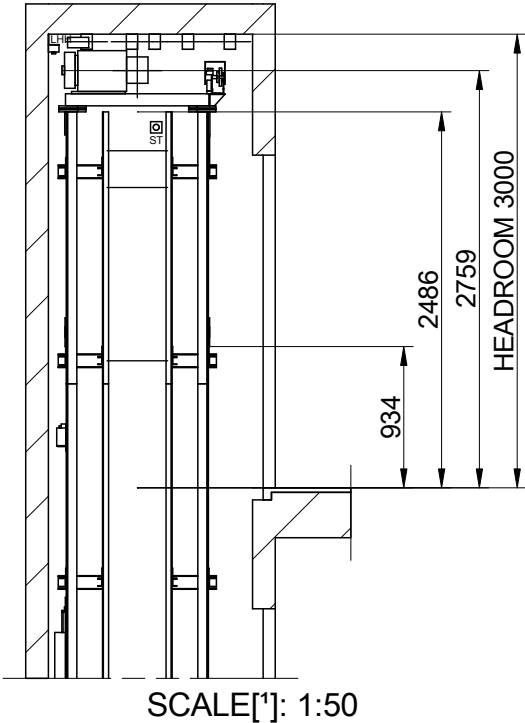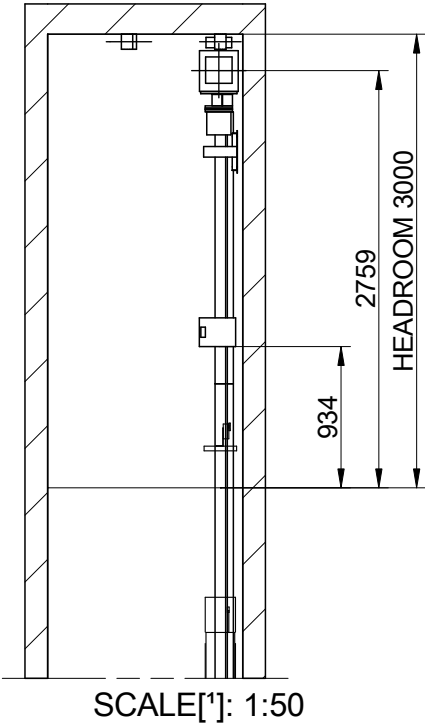


F-1-602.rev.4			[*] Unbounded dimensions in drawings are indicative and not binding.		SHEET	
DRAWING	DATE	REV.			5/9	
MP	2022	0	REFERENCE:			
MODEL LIFT:		MPFLEXMINILATERAL320S_EN				
MP FLEX MINI		CLIENT:		MP ASCENSORES		
CAPACITY: [N° PERSONS]		4	WORK SITUATION:			
NOMINAL LOAD: [kg]		320				
SPEED: [m/s]		1				
STOPS: [N°]		4				
FREQUENCY: [Hz]		50				
TENSION: [V]						
TRIFASICO.380V						

04-BEAM AND LIFTING HOOKS

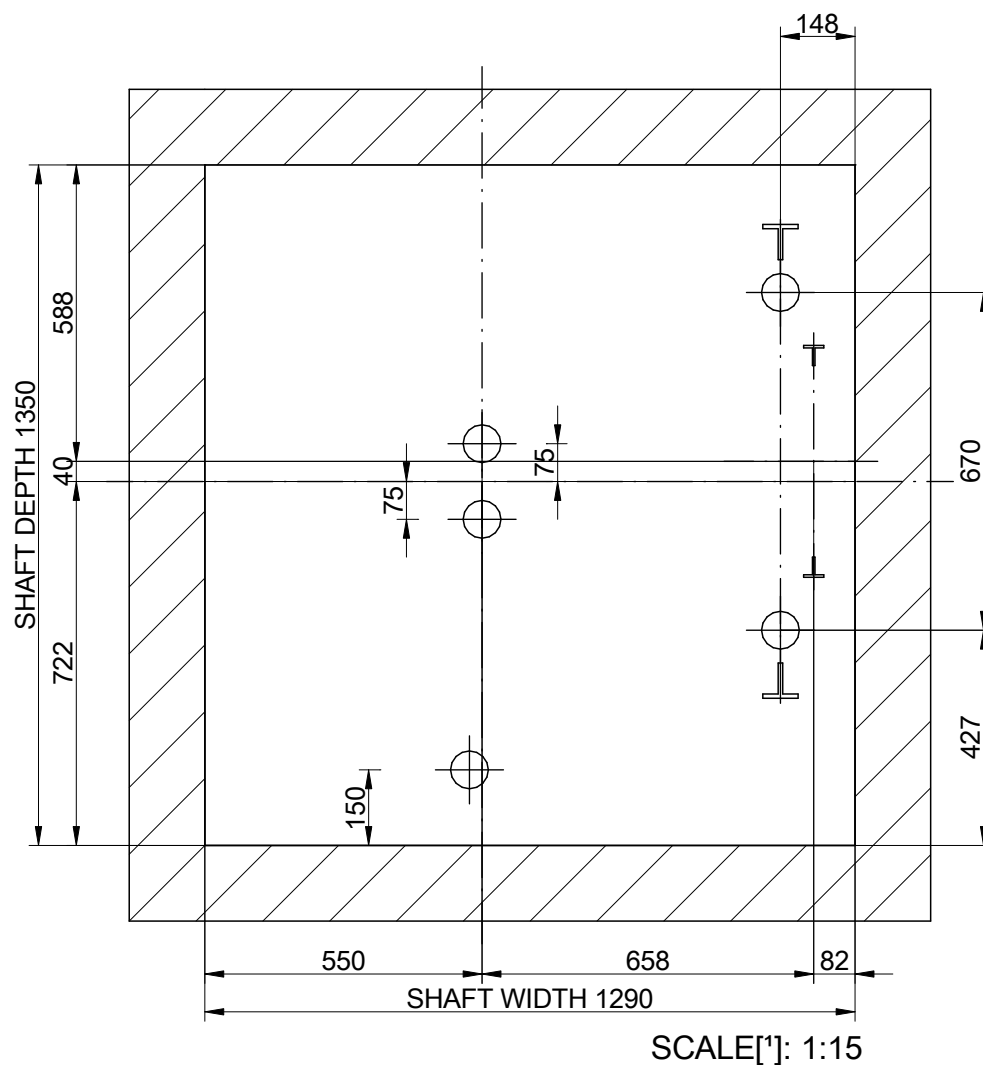


POSITION OF REMOVABLE LIFTING HOOKS ABLE TO SUPPORT
1000 kg EACH ONE SUPPLIED BY CONSTRUCTOR
(RECOMMENDED POSITION LOADHOOKS)


F-1-602.rev.4

DRAWING	DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.		SHEET	
MP	2022	0			6/9	
MODEL LIFT:			REFERENCE:			
MP FLEX MINI			MPFLEXMINILATERAL320S_EN			
CAPACITY: [Nº PERSONS]			4	CLIENT:		
NOMINAL LOAD: [kg]			320	WORK SITUATION:		
SPEED: [m/s]			1			
STOPS: [Nº]			4			
FREQUENCY: [Hz]			50			
TENSION: [V]						
TRIFASICO.380V						
MP ASCENSORES						

05-PIT LAYOUT


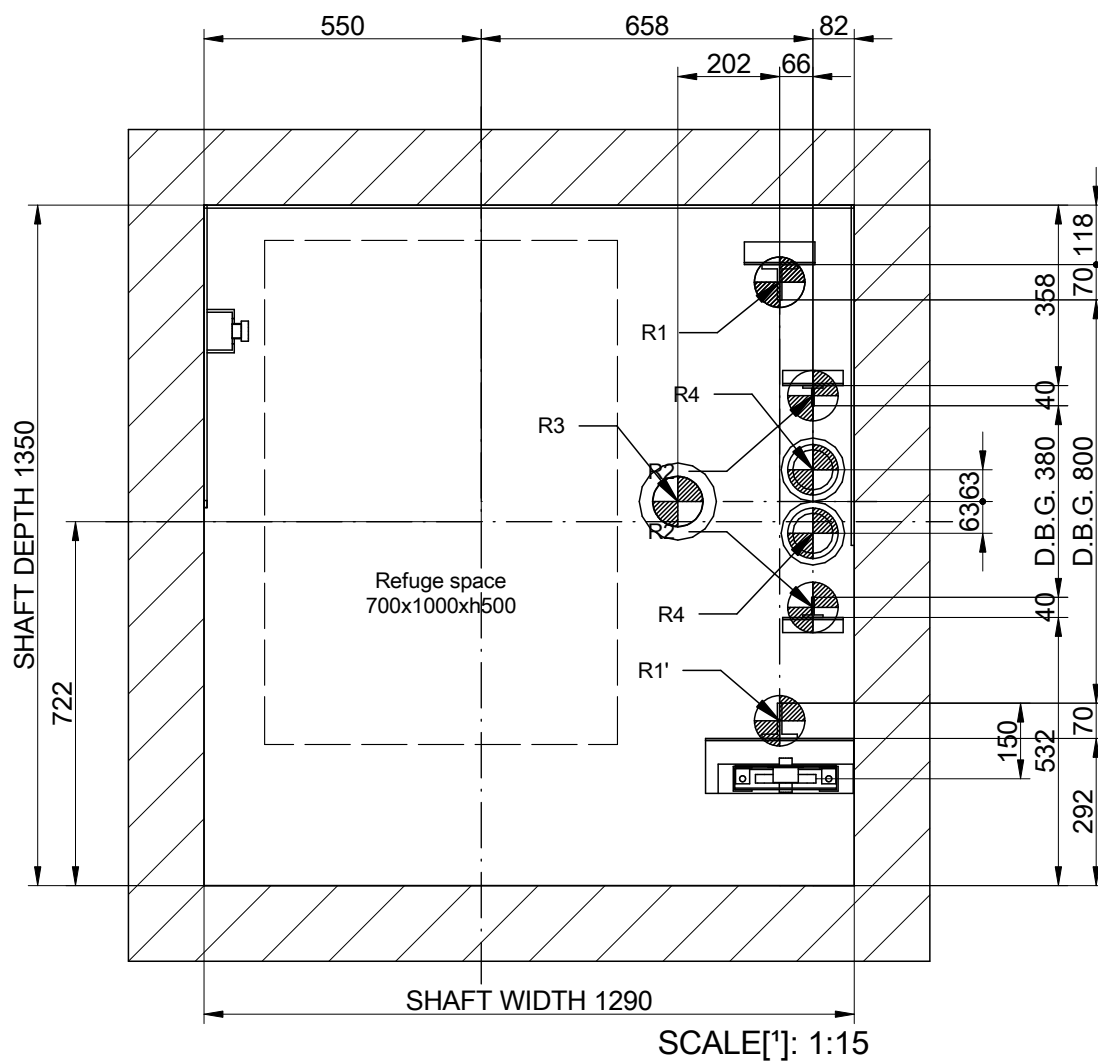


F-1-602.rev.4


DRAWING	DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.		SHEET	
MP	2022	0	REFERENCE:		7/9	
MODEL LIFT:			MPFLEXMINILATERAL320S_EN			
MP FLEX MINI						
CAPACITY: [Nº PERSONS]		4	CLIENT:			
NOMINAL LOAD: [kg]		320	WORK SITUATION:			
SPEED: [m/s]		1	MP ASCENSORES			
STOPS: [Nº]		4				
FREQUENCY: [Hz]		50				
TENSION: [V]						
TRIFASICO.380V						

MP ASCENSORES

06-DOOR HOLE DETAIL

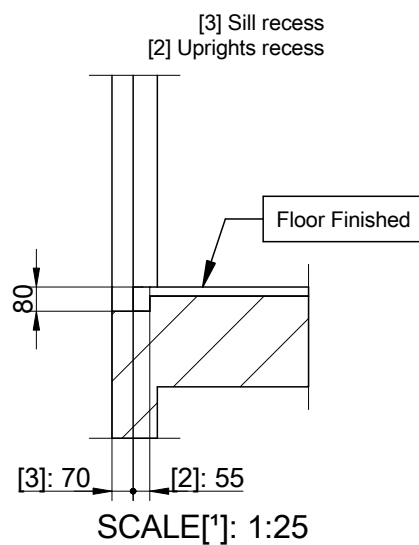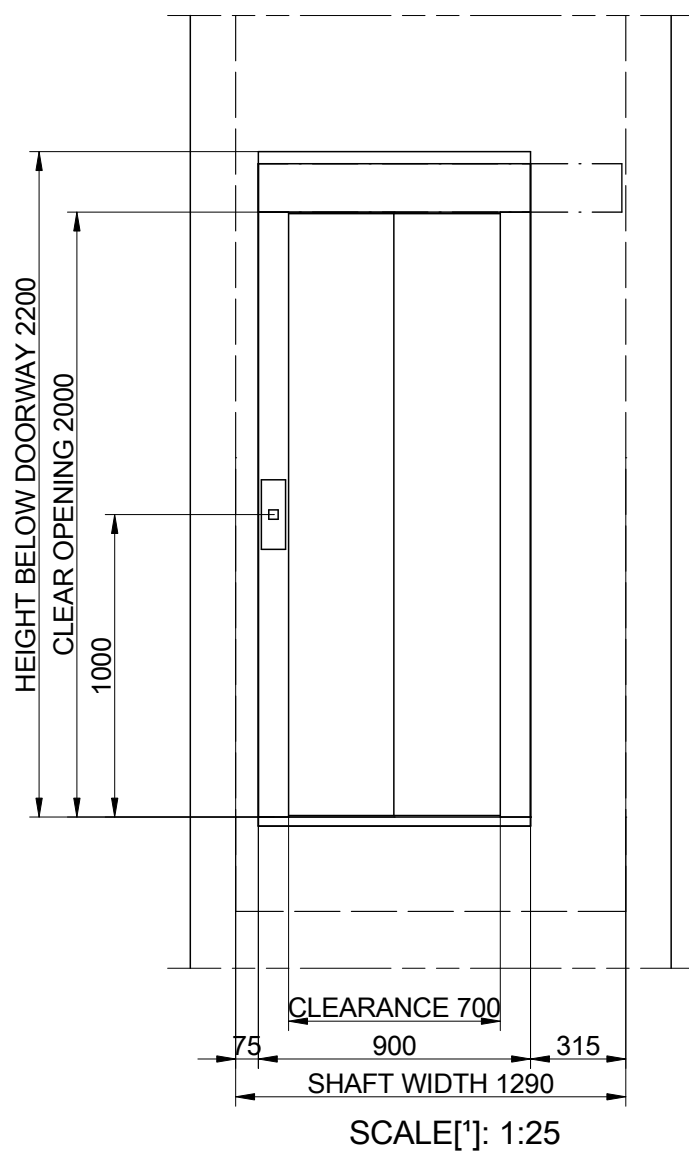


F-1-602.rev.4

DRAWING	DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.		SHEET	
MP	2022	0	REFERENCE:		8/9	
MODEL LIFT:			MPFLEXMINILATERAL320S_EN			
MP FLEX MINI						
CAPACITY: [Nº PERSONS]		4	CLIENT:			
NOMINAL LOAD: [kg]		320	WORK SITUATION:			
SPEED: [m/s]		1				
STOPS: [Nº]		4				
FREQUENCY: [Hz]		50				
TENSION: [V]						
TRIFASICO.380V						


MP ASCENSORES

MP ASCENSORES

07-HEADROOM

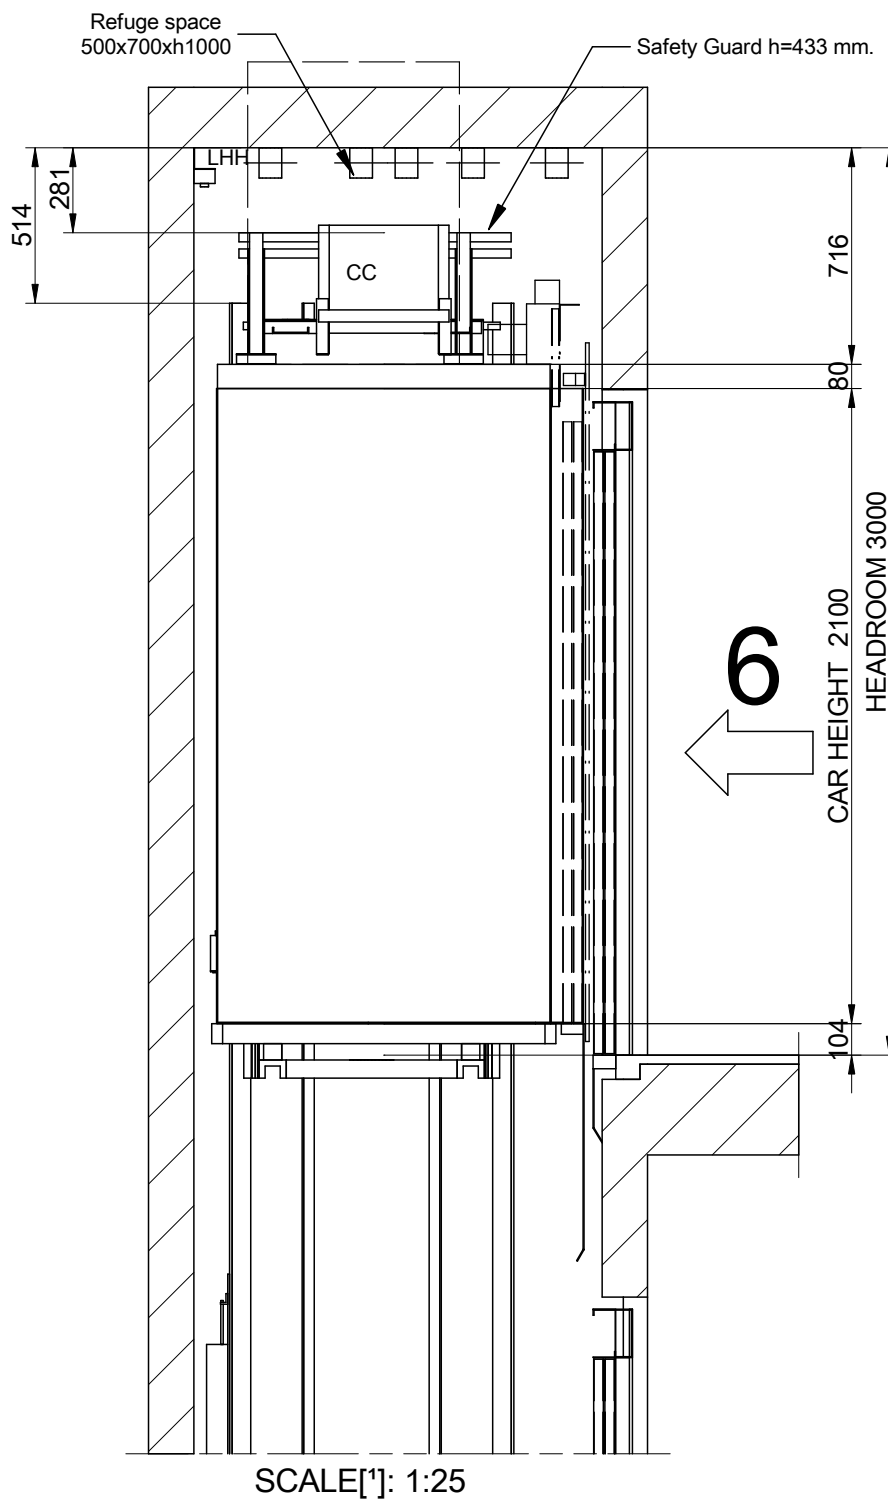

F-1-602.rev.4

DRAWING	DATE	REV.	[*] Unbounded dimensions in drawings are indicative and not binding.			SHEET	
MP	2022	0				9/9	
MODEL LIFT:			REFERENCE:				
MP FLEX MINI			MPFLEXMINILATERAL320S_EN				
CAPACITY: [Nº PERSONS]		4	CLIENT:				
NOMINAL LOAD: [kg]		320	WORK SITUATION:				
SPEED: [m/s]		1					
STOPS: [Nº]		4					
FREQUENCY: [Hz]		50					
TENSION: [V]							
TRIFASICO.380V							

MP ASCENSORES

MP ASCENSORES