



01-PLAN VIEW

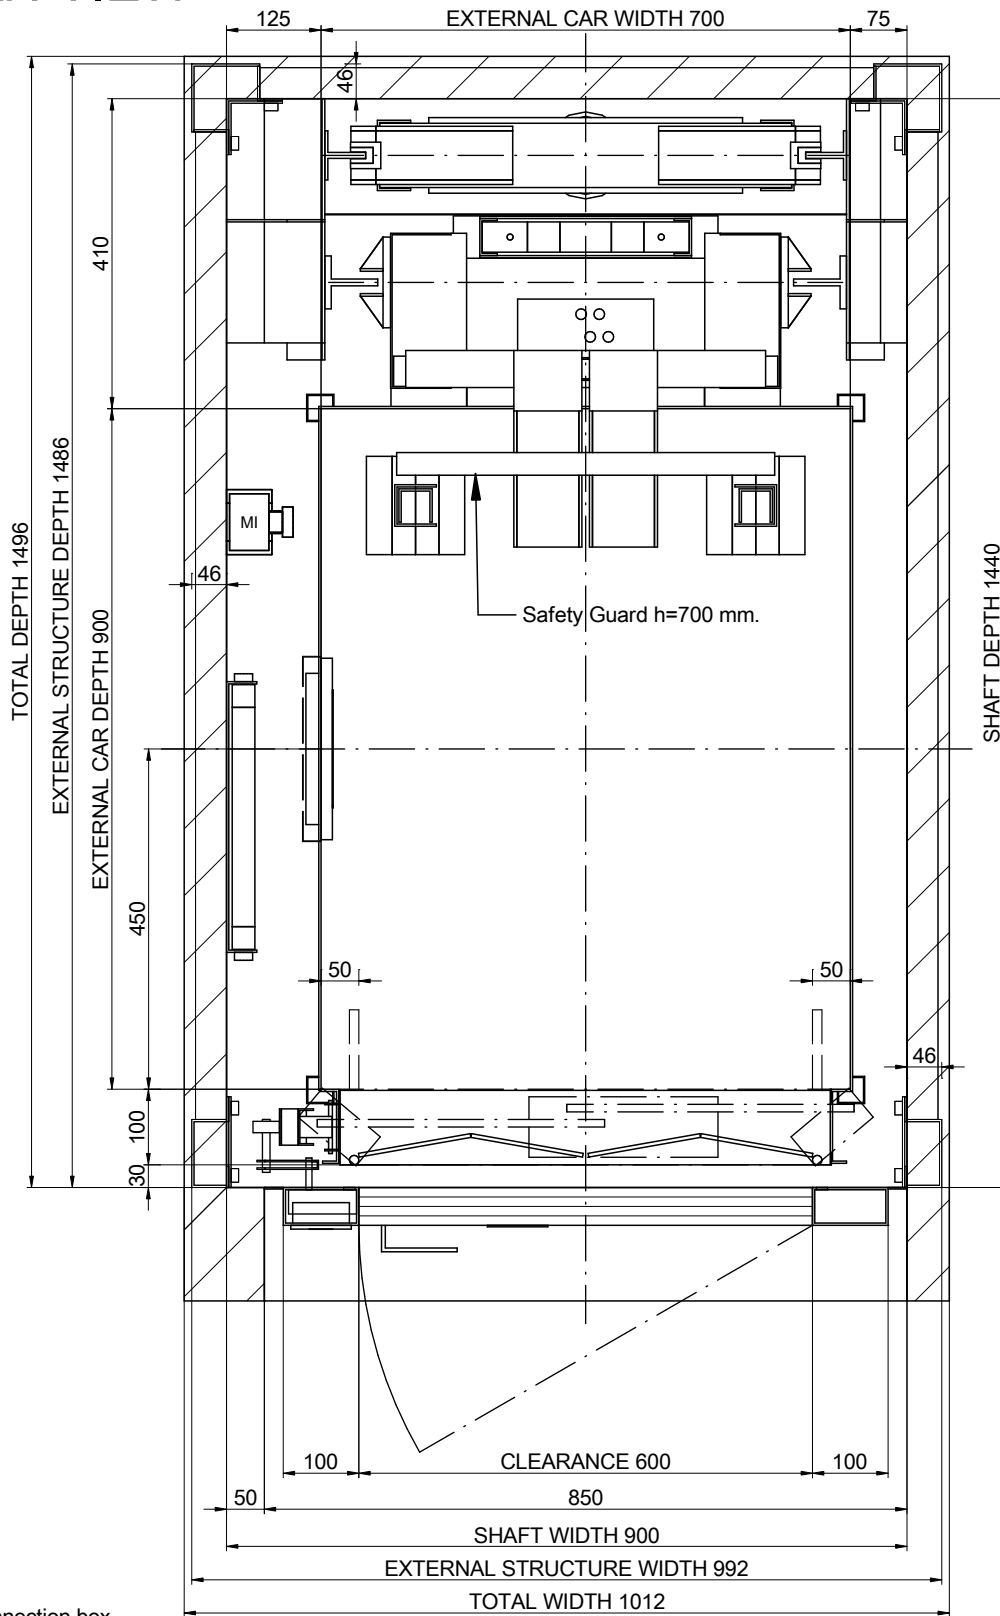


NOMENCLATURE

CC: Car ceiling connection box
MI: Inspection control station

SCALE[*]: 1:10

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPGO!FLEXFONDO225C_EN	
MP	2017	00	1/7		
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP GO! FLEX					
CAPACITY: [N° PERSONS]			3	<h1>MP LIFTS</h1>	
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

02-SIDE VERTICAL SECTION

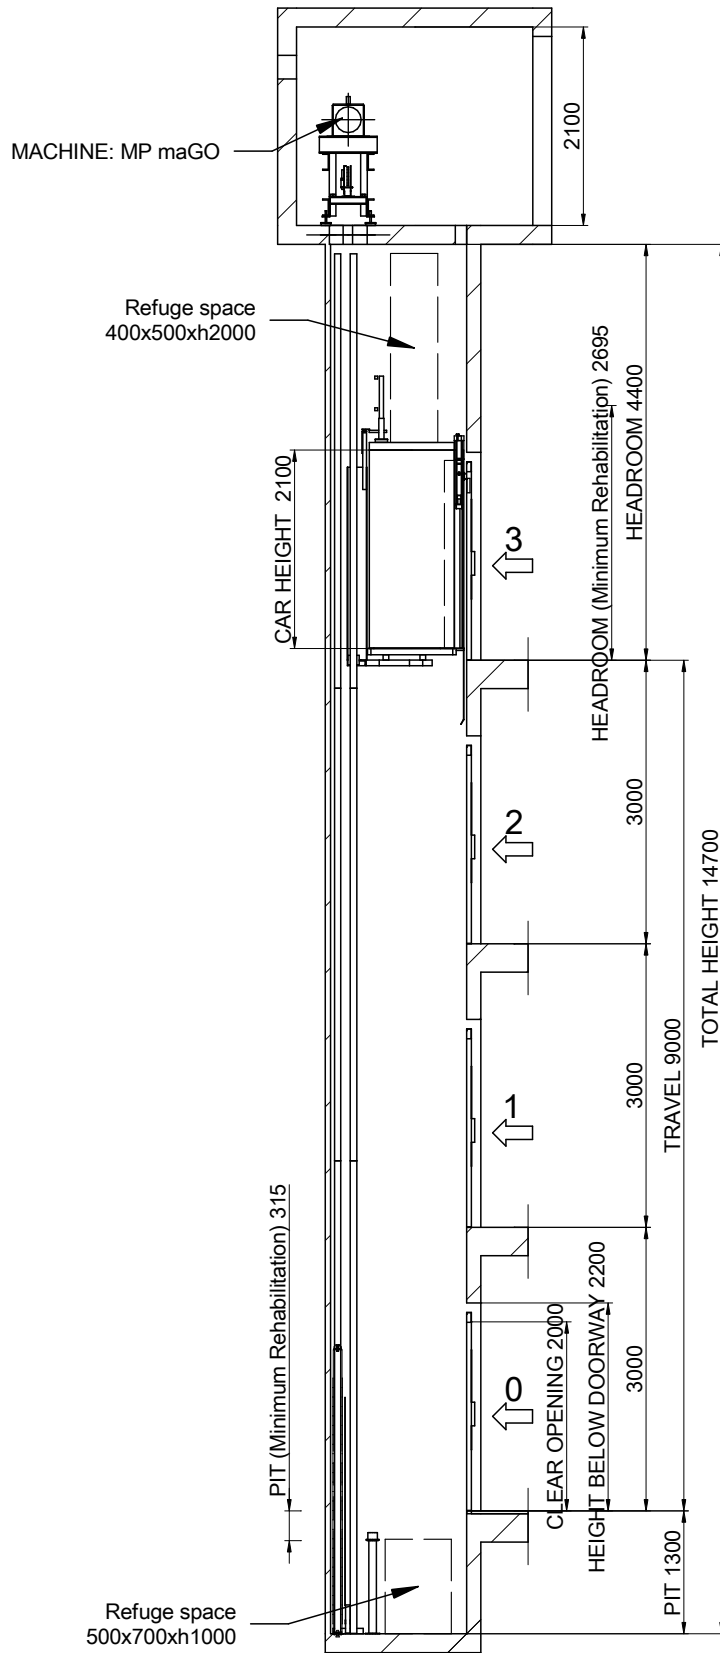


SCALE[*]: 1:80


DRAWING		DATE	REV.	SHEET	MP	MP LIFTS	
		2017	00	2/7			
MODEL LIFT:		MP GO! FLEX				REFERENCE: MPGOIFLEXFONDO225C_EN	
CAPACITY: [N° PERSONS]		3				CLIENT:	
NOMINAL LOAD: [kg]		225				WORK SITUATION:	
SPEED: [m/s]		1					
FREQUENCY: [Hz]		50					
TENSION: [V]		380V [Three-phase]					

Flat and levelled floor, protected against water leaking.
 [EN81-20:2014 5.2.1.9]
 Foresee pit access device
 [EN81-20:2014 5.2.2.4]
 Stop device
 [EN81-20:2014 5.2.1.5.1. a)
 Inspection control station.
 [EN81-20:2014 5.2.1.5.1. b)
 Power supply
 [EN81-20:2014 5.2.1.5.1. c)
 Light switch
 commuted with the cabinet.
 [EN81-20:2014 5.2.1.5.1. d)


04-SLAB LAYOUT

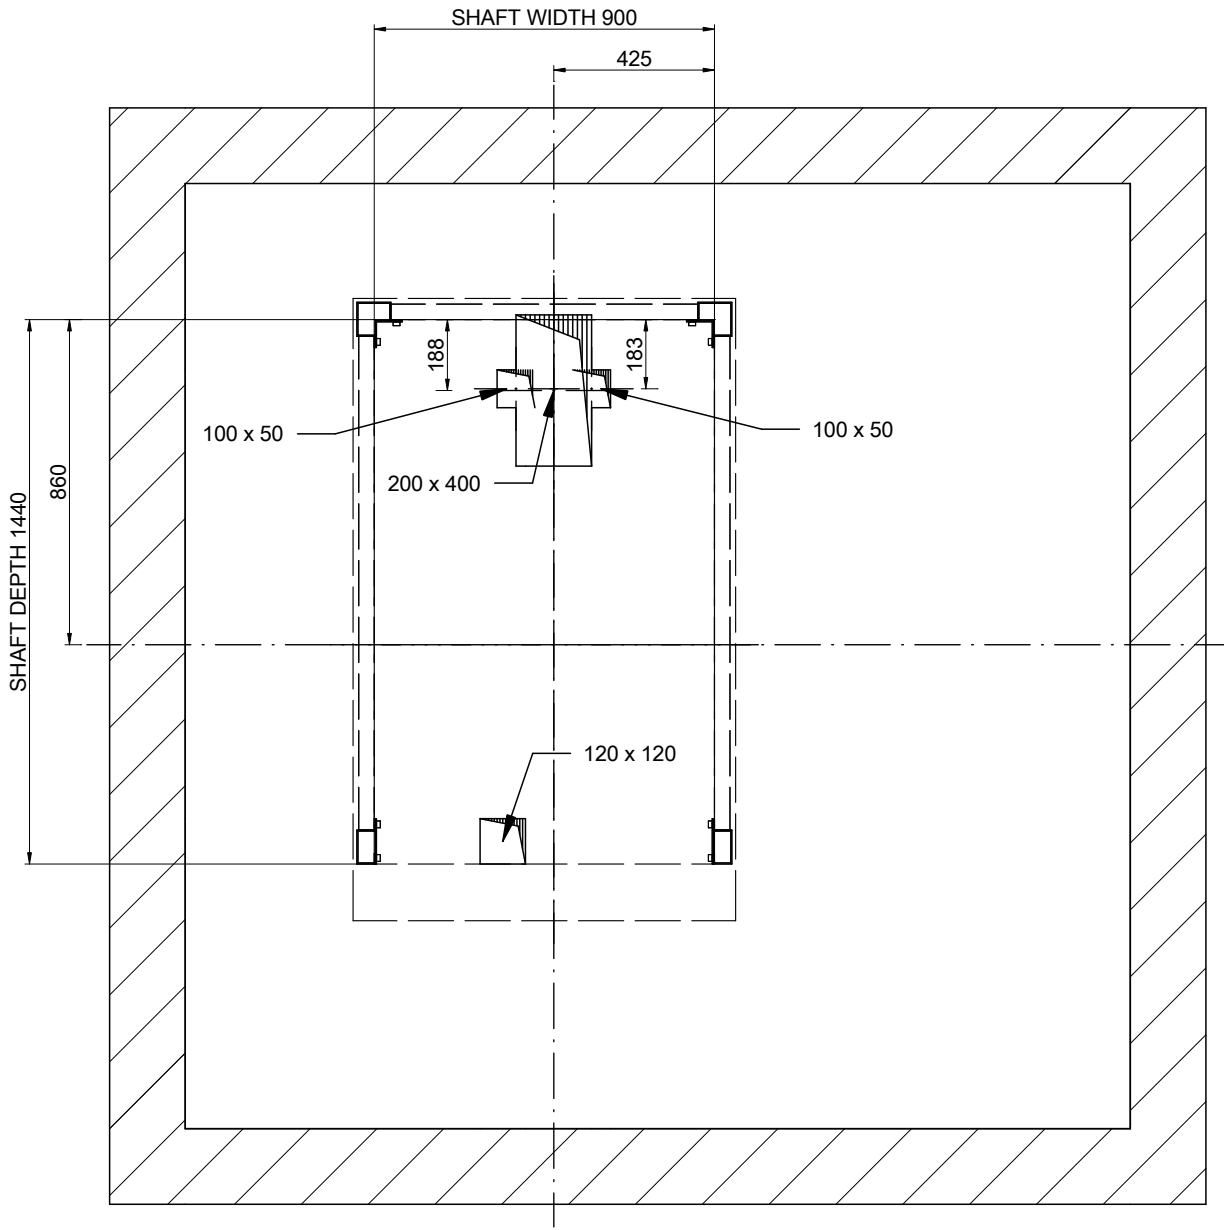

SCALE[*]: 1:20


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	3/7	REFERENCE: MPGO!FLEXFONDO225C_EN	
MODEL LIFT:				CLIENT:	<p>MP LIFTS</p>
MP GO! FLEX				WORK SITUATION:	
CAPACITY: [N° PERSONS]			3		
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]			

04B-MACHINE ROOM

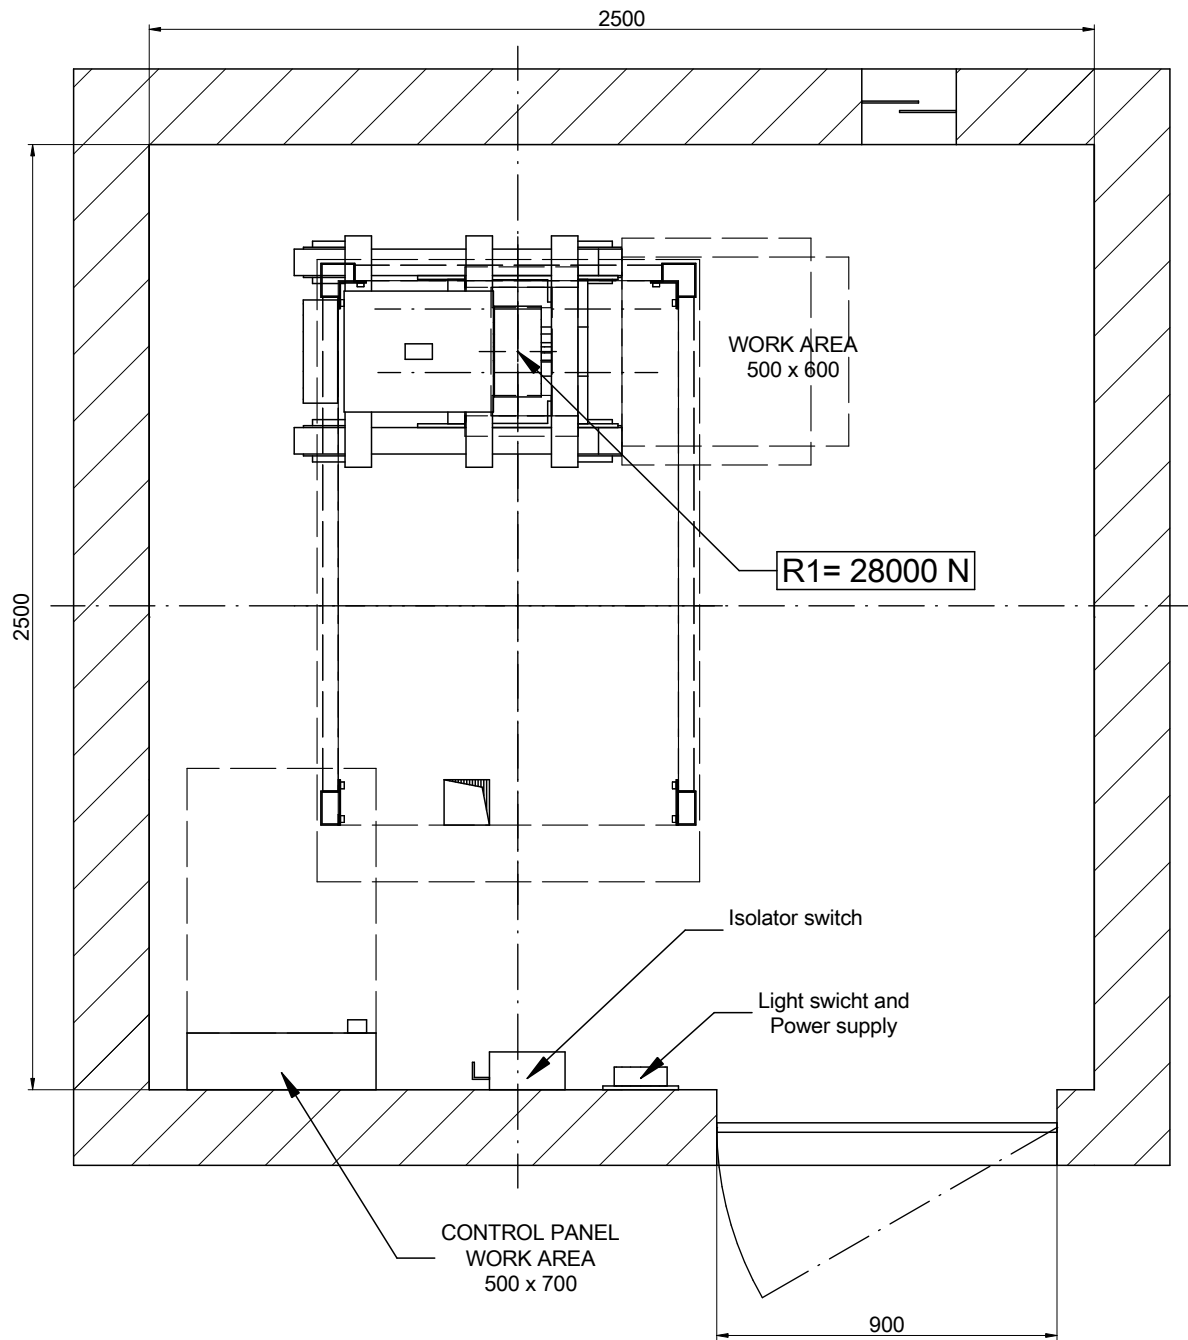


Minimum machine room height: 2100 mm.
 [EN 81-20:2014 5.2.6.3.2.1]
 Minimum clearance door: 600x2000 mm.
 [EN 81-20:2014 5.2.3.2 a]

SCALE[*]: 1:20

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	4/7	REFERENCE: MPGO!FLEXFONDO225C_EN	
MODEL LIFT:				CLIENT:	MP LIFTS
MP GO! FLEX				WORK SITUATION:	
CAPACITY: [N° PERSONS]			3		
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

05-PIT LAYOUT


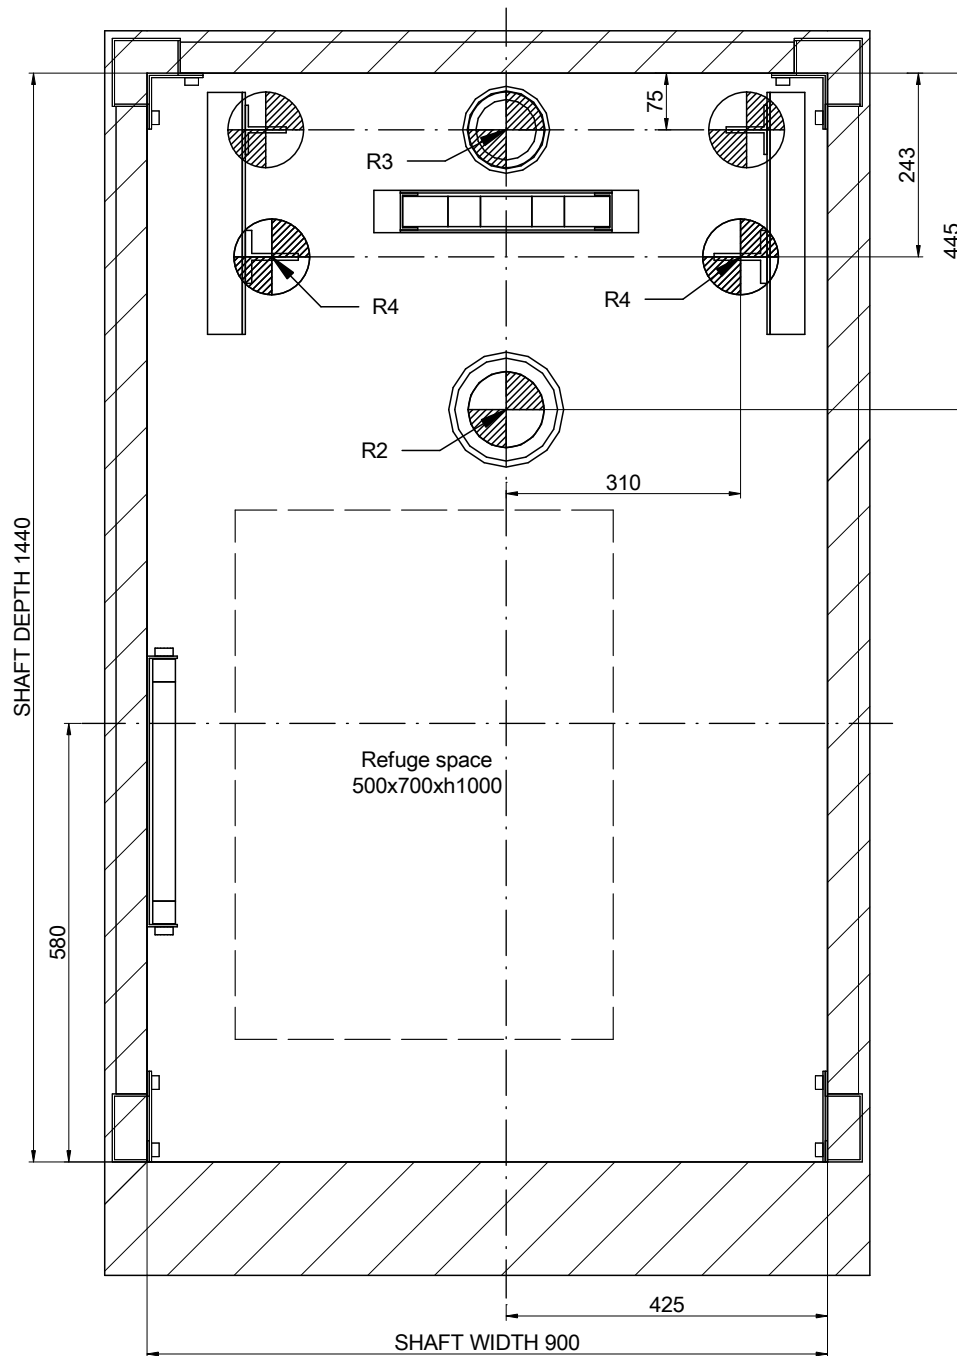



SCALE[*]: 1:10

REACTIONS [N] [max.]			
R2	36500		
R3	30000	R4 11000	
Sx	1900	Sy 300	


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	5/7	REFERENCE: MPGO!FLEXFONDO225C_EN	
MODEL LIFT:				CLIENT: WORK SITUATION:	<p>MP LIFTS</p>
MP GO! FLEX					
CAPACITY: [N° PERSONS]			3		
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]			


06-DOOR HOLE DETAIL

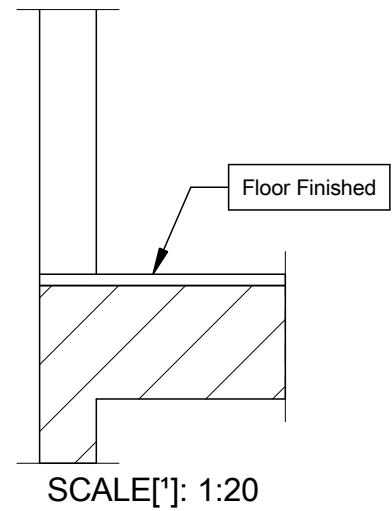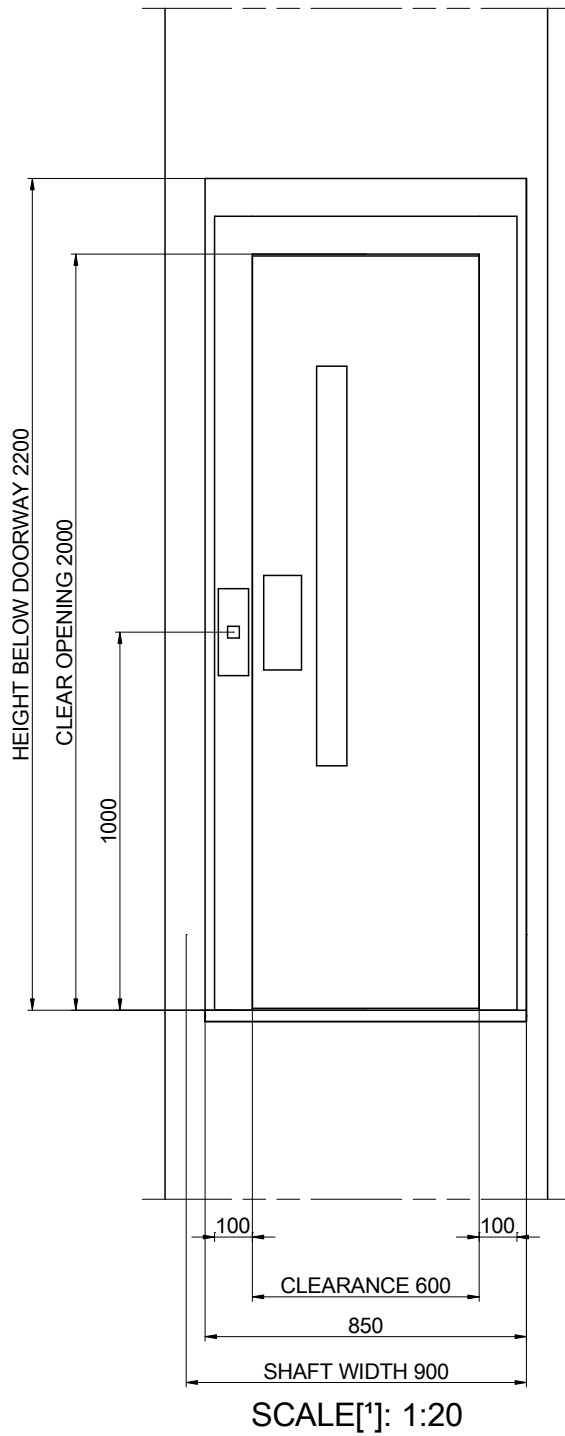

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPGO!FLEXFONDO225C_EN	
MP	2017	00	6/7		
MODEL LIFT:				CLIENT: WORK SITUATION:	
MP GO! FLEX					
CAPACITY: [N° PERSONS]			3		
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]		MP LIFTS	

07-HEADROOM

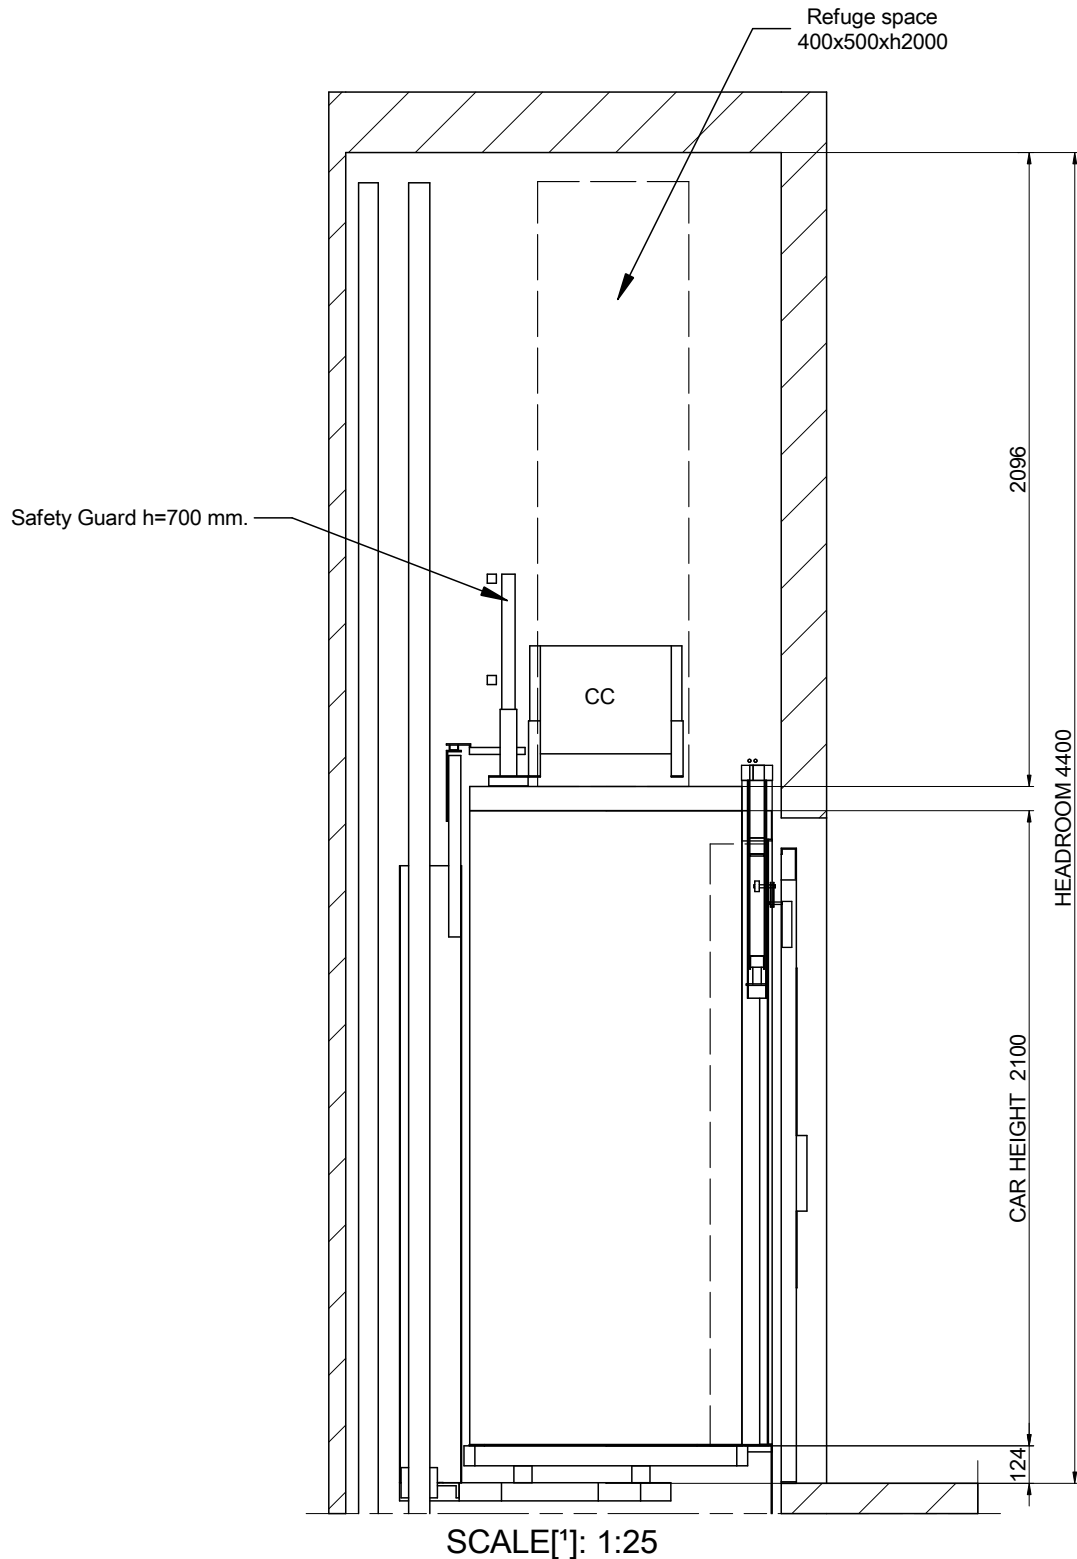

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPGO!FLEXFONDO225C_EN	
MP	2017	00	7/7		
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP GO! FLEX					
CAPACITY: [N° PERSONS]			3	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		