

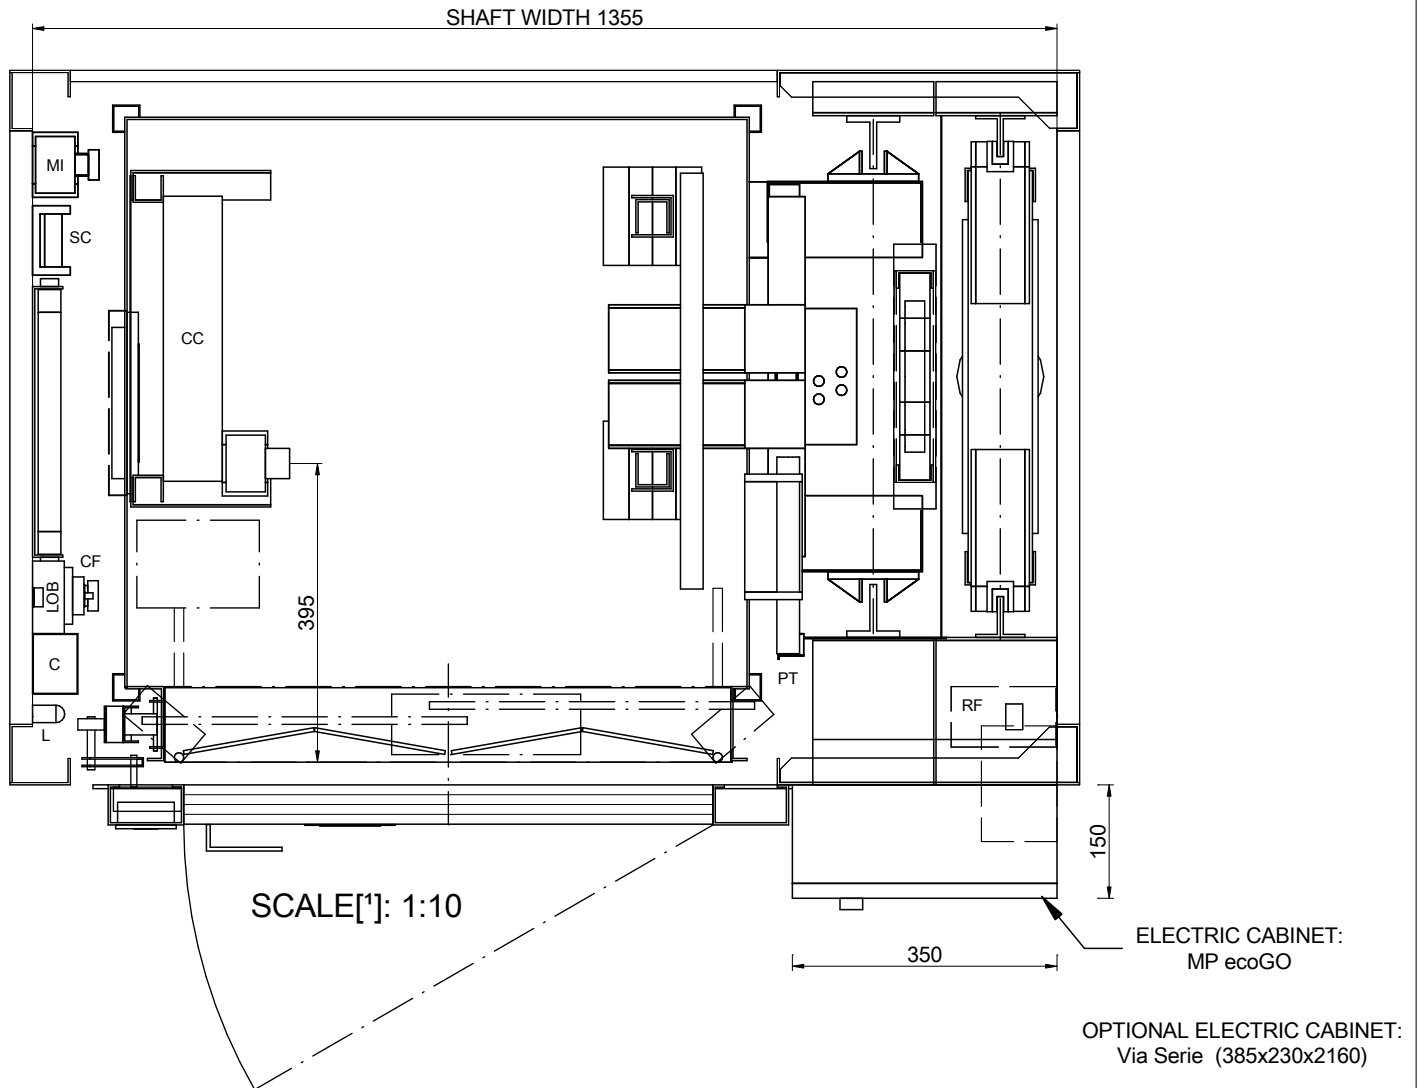


01-PLAN VIEW





DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2016	00	1/8	REFERENCE: MPGO!FLEXLATERAL225S_EN	
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP GO! FLEX					
CAPACITY: [N° PERSONS]			3	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

01B-PLAN VIEW

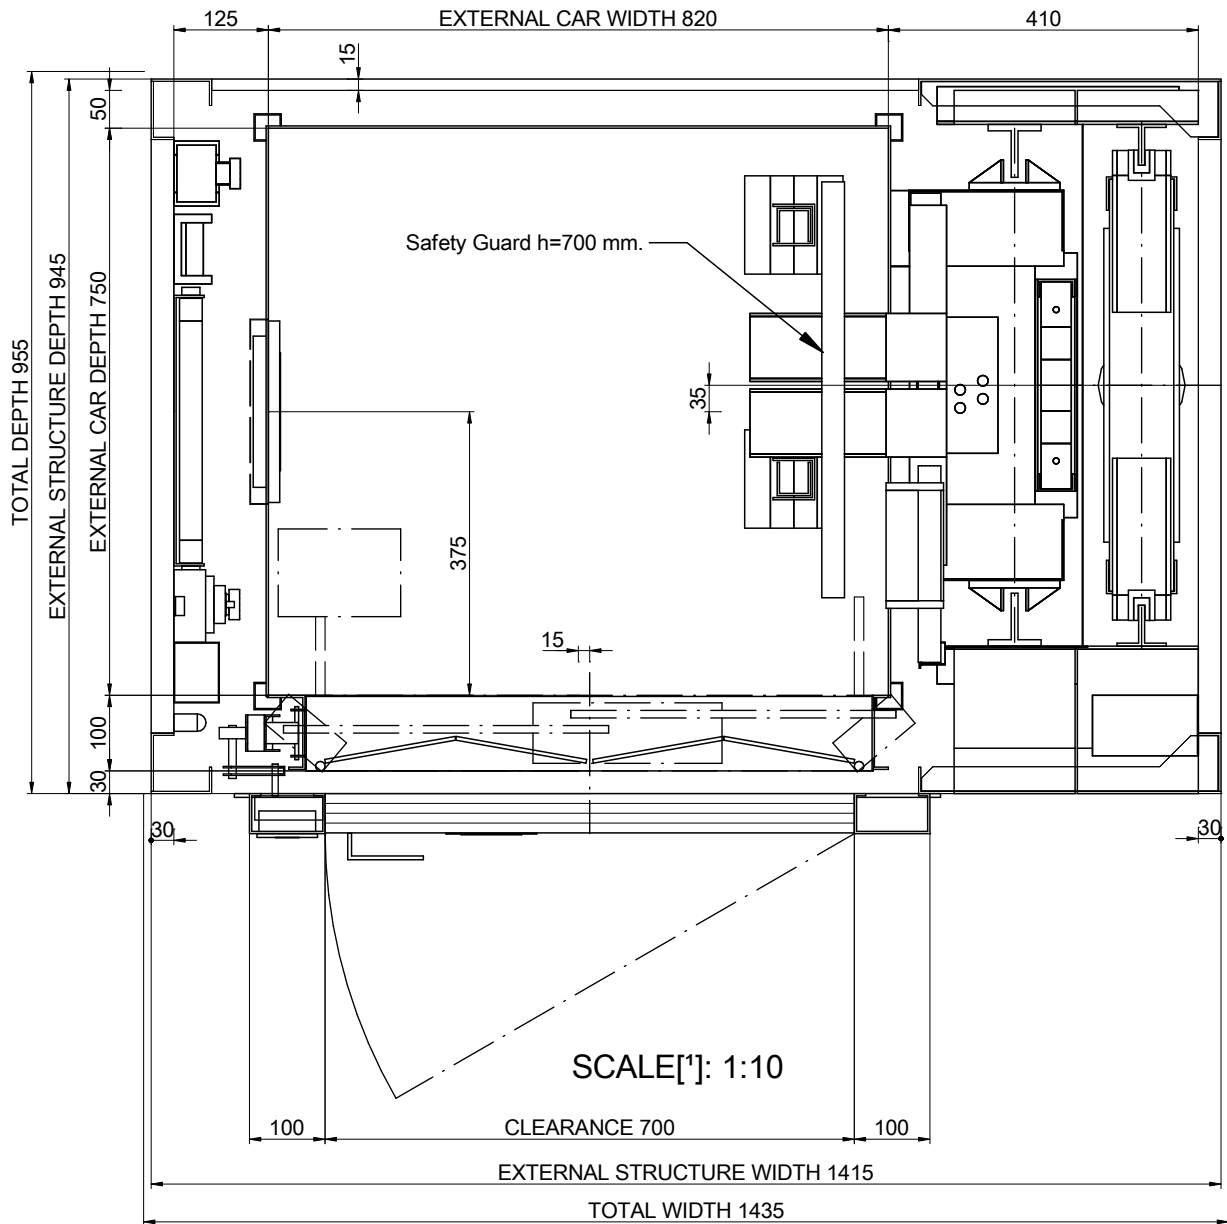


- NOMENCLATURE**
- C: Wiring channel
 - CC: Car ceiling connection box
 - CF: Pit box
 - CL: Shaft light switch
 - DOC: Operator control box
 - L: Lamp
 - LOB: Pushbutton control board
 - MI: Inspection control station
 - PT: Fixed cam
 - RF: Brake resistor
 - ST: Stopping device
 - SC: Travelling cable support

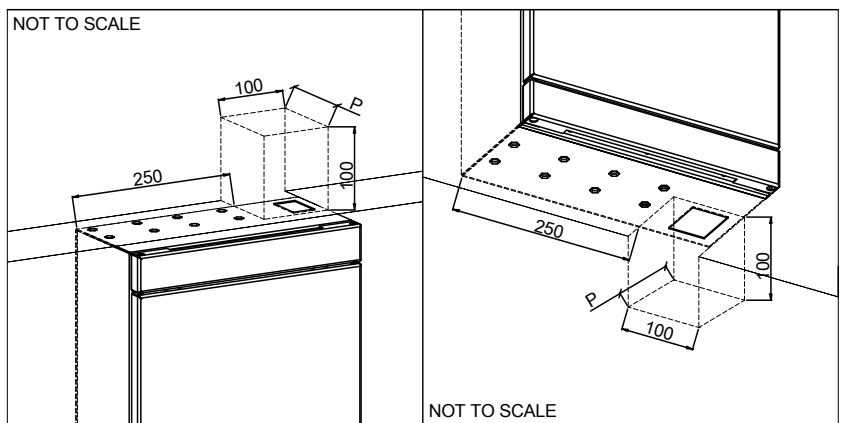

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2016	00	2/8	REFERENCE: MPGO!FLEXLATERAL225S_EN	
MODEL LIFT:				CLIENT:	<p>MP LIFTS</p>
MP GO! FLEX				WORK SITUATION:	
CAPACITY: [N° PERSONS]			3		
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]			

02-SIDE VERTICAL SECTION

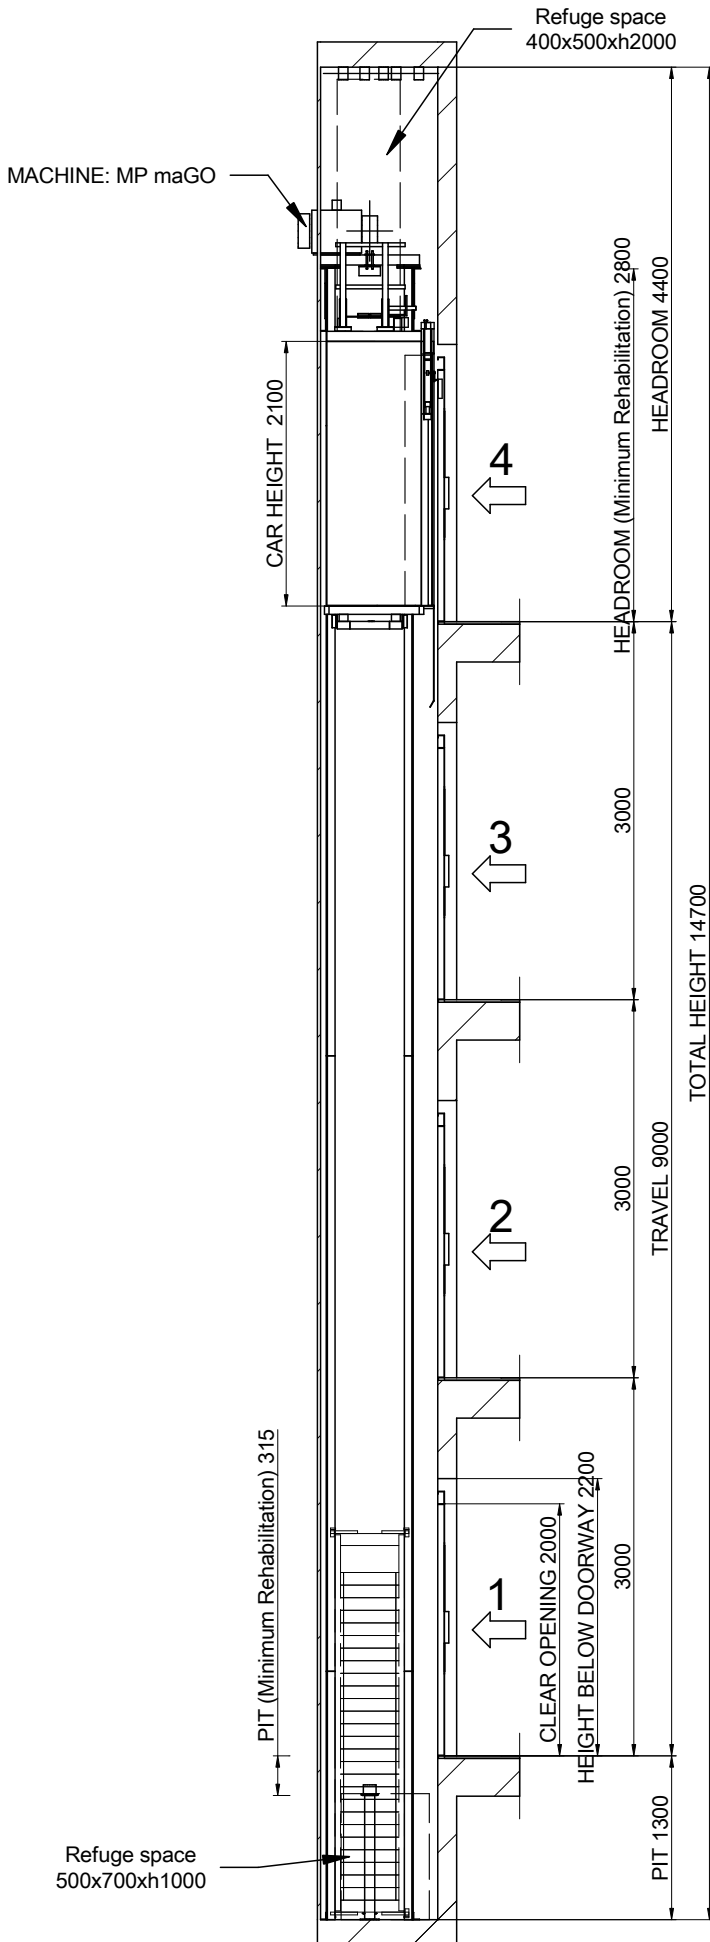



SCALE[*]: 1:60

Flat and levelled floor, protected against water leaking.
 [EN81-20:2014 5.2.1.9]
 Foresee pit access device
 [EN81-20:2014 5.2.2.4]
 Stop device
 [EN81-20:2014 5.2.1.5.1. a]
 Inspection control station.
 [EN81-20:2014 5.2.1.5.1. b]
 Power supply
 [EN81-20:2014 5.2.1.5.1. c]
 Light switch
 commuted with the cabinet.
 [EN81-20:2014 5.2.1.5.1. d]

DRAWING		DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.
MP	2016	00	3/8	REFERENCE: MPGOIFLEXLATERAL225S_EN	
MODEL LIFT:		MP GO! FLEX			CLIENT: WORK SITUATION:
CAPACITY: [N° PERSONS]		3			
NOMINAL LOAD: [kg]		225			
SPEED: [m/s]		1			
FREQUENCY: [Hz]		50			
TENSION: [V]		380V [Three-phase]			MP LIFTS



03B-FIXING DETAILS IN HEADROOM

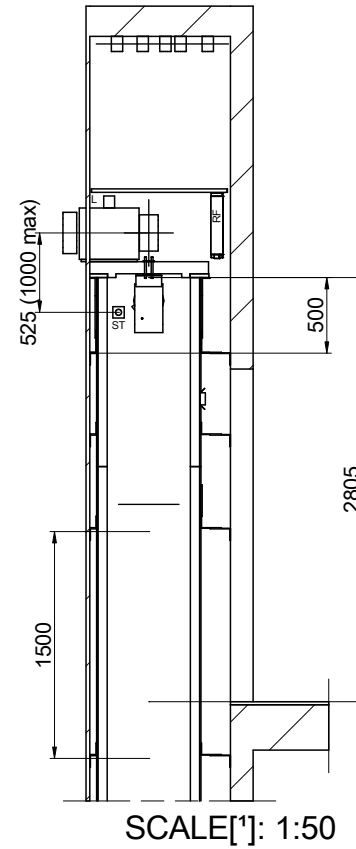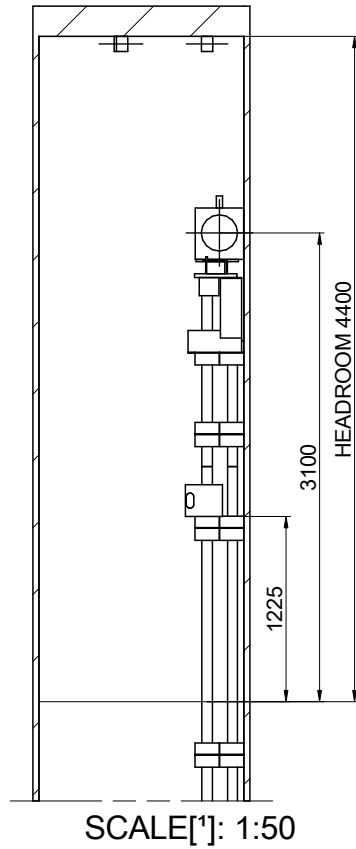


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.
MP	2016	00	4/8	REFERENCE: MPGO!FLEXLATERAL225S_EN
MODEL LIFT:				CLIENT: WORK SITUATION:
MP GO! FLEX				
CAPACITY: [N° PERSONS]			3	MP LIFTS
NOMINAL LOAD: [kg]			225	
SPEED: [m/s]			1	
FREQUENCY: [Hz]			50	
TENSION: [V]		380V [Three-phase]		




04-BEAM AND LIFTING HOOKS


POSITION OF REMOVABLE LIFTING HOOKS ABLE TO SUPPORT
1000 kg EACH ONE SUPPLIED BY CONSTRUCTOR
(RECOMMENDED POSITION LOADHOOKS)

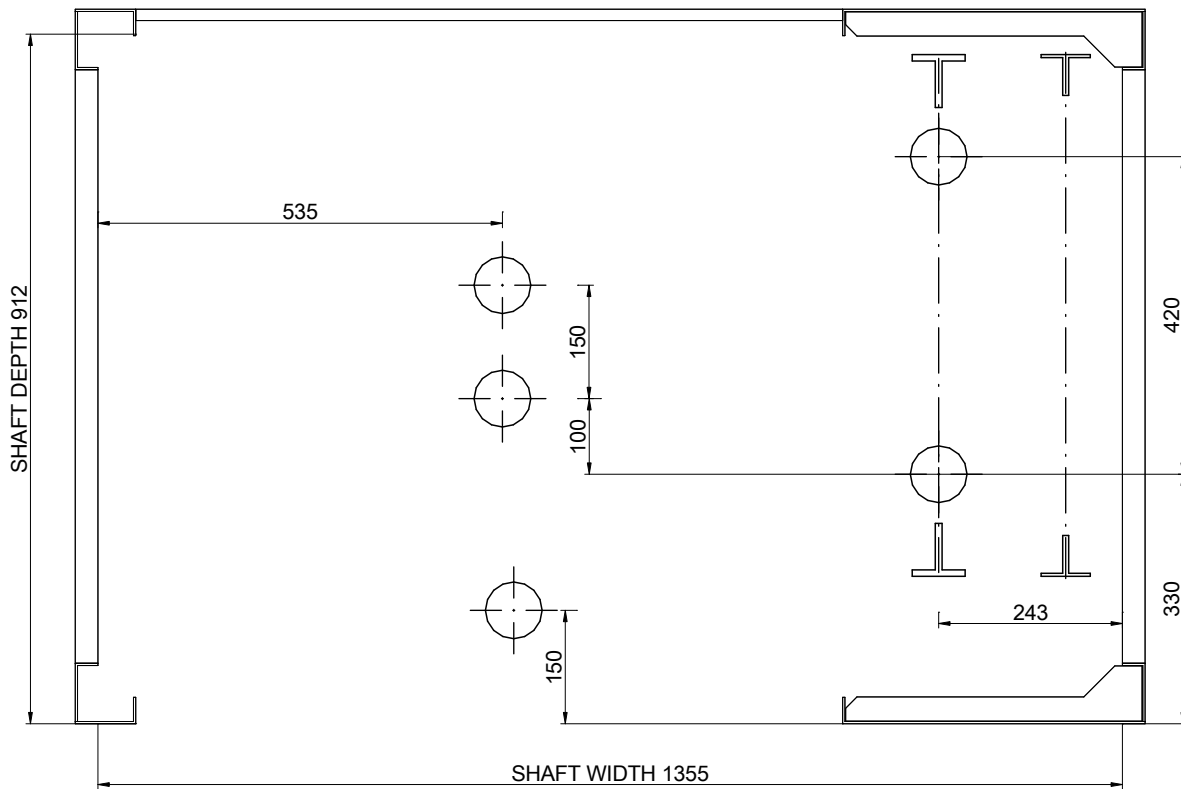

SCALE[*]: 1:10


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2016	00	5/8	REFERENCE: MPGO!FLEXLATERAL225S_EN	
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP GO! FLEX					
CAPACITY: [N° PERSONS]			3	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

05-PIT LAYOUT


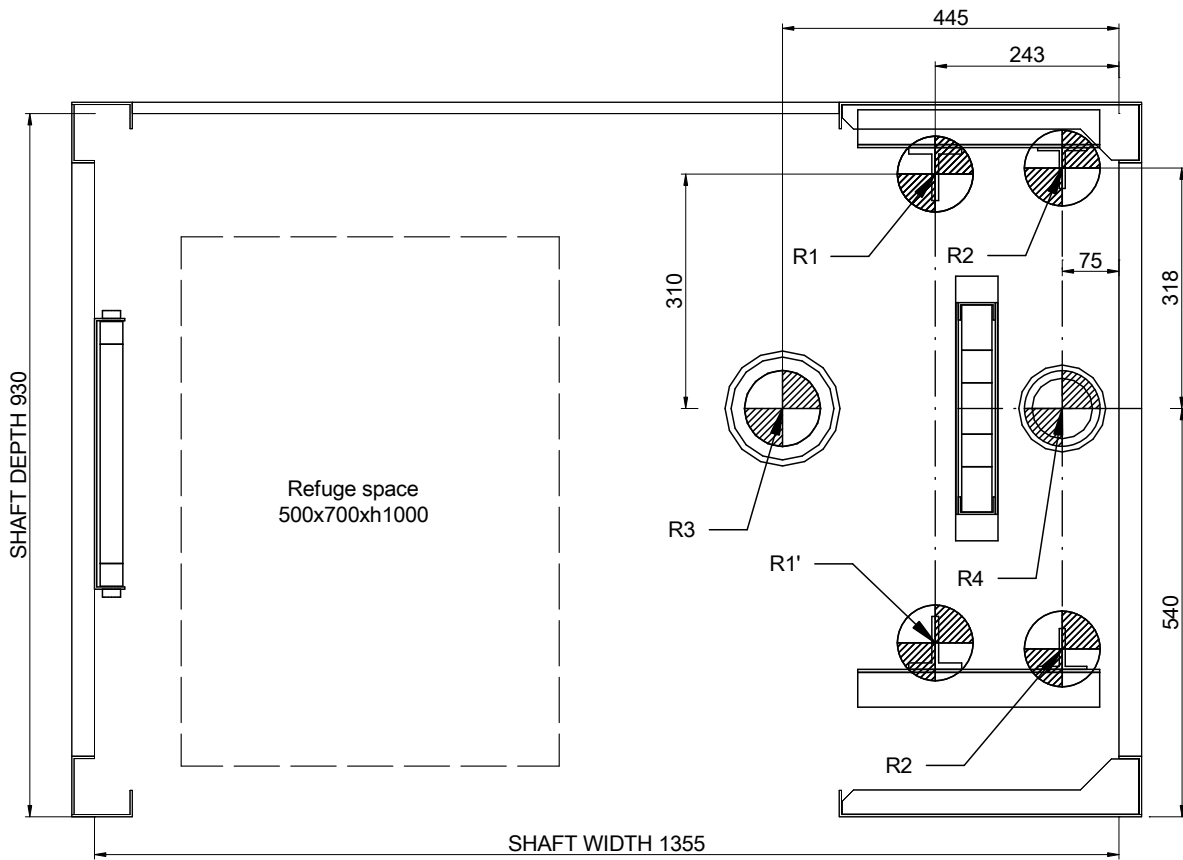



SCALE[*]: 1:10

REACTIONS [N] [max.]			
R1	15000	R2	900
R1'	15000	R2'	900
R3	30000	R4	25500
N	1500	T	500


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2016	00	6/8		
MODEL LIFT:				REFERENCE:	<p>CLIENT:</p> <p>WORK SITUATION:</p>
MP GO! FLEX				MPGO!FLEXLATERAL225S_EN	
CAPACITY: [N° PERSONS]			3		
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		
MP LIFTS					


06-DOOR HOLE DETAIL

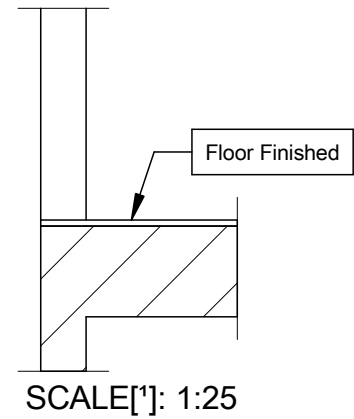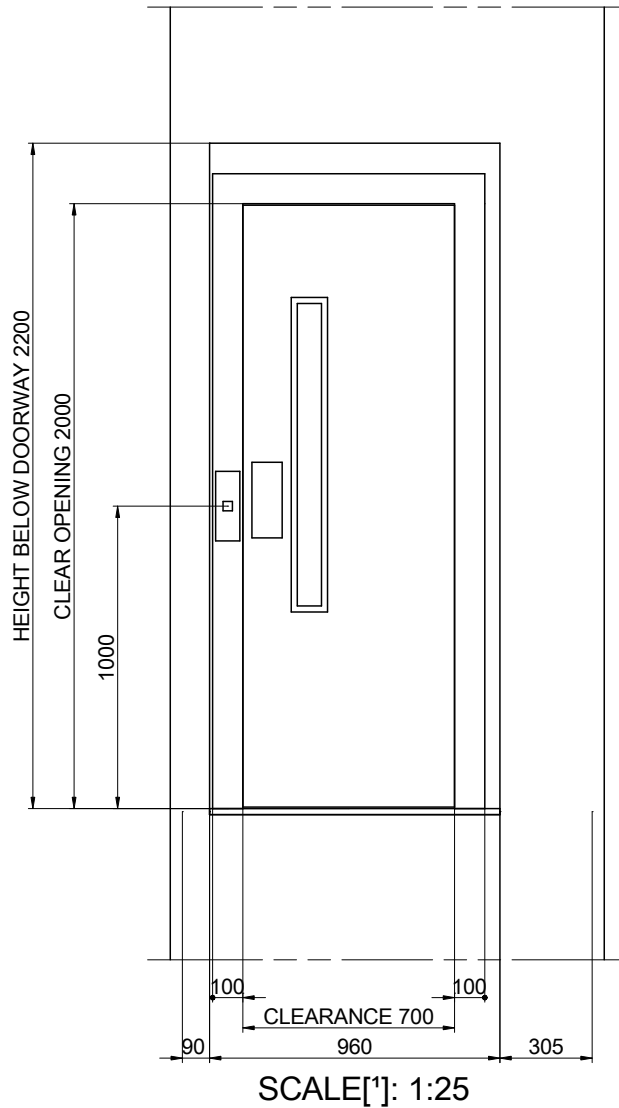

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2016	00	7/8	REFERENCE: MPGO!FLEXLATERAL225S_EN	
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP GO! FLEX					
CAPACITY: [N° PERSONS]			3	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

07-HEADROOM

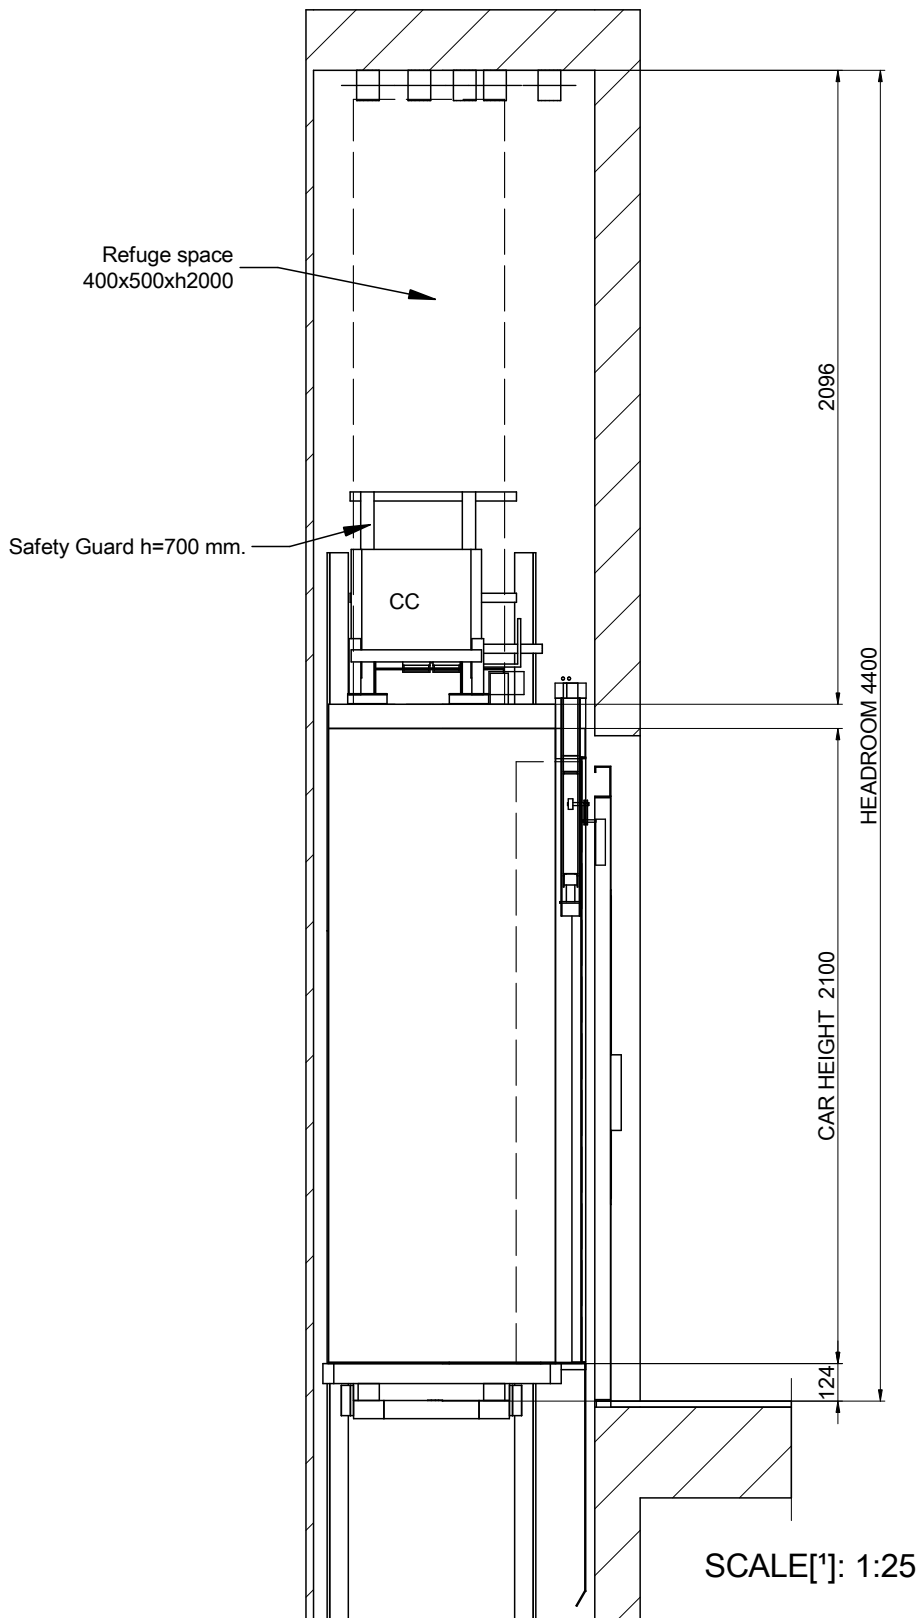

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2016	00	8/8	REFERENCE: MPGO!FLEXLATERAL225S_EN	
MODEL LIFT:				CLIENT:	MP LIFTS
MP GO! FLEX				WORK SITUATION:	
CAPACITY: [N° PERSONS]			3		
NOMINAL LOAD: [kg]			225		
SPEED: [m/s]			1		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		