

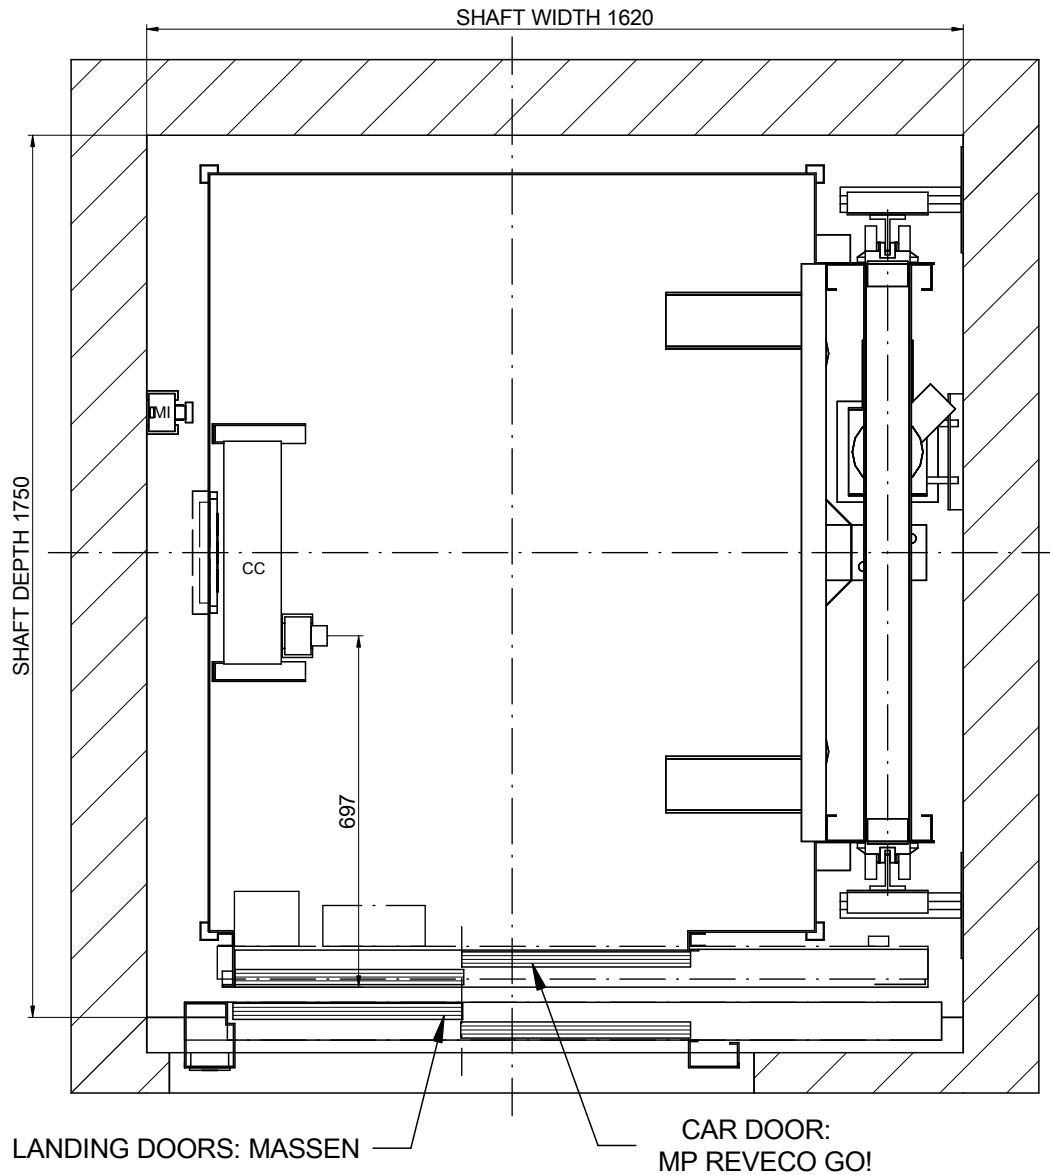


# 01-PLAN VIEW



DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPHLATERAL800C_EN	
MP	2017	00	1/8		
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP H					
CAPACITY: [N° PERSONS]			10	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			800		
SPEED: [m/s]			0.5		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

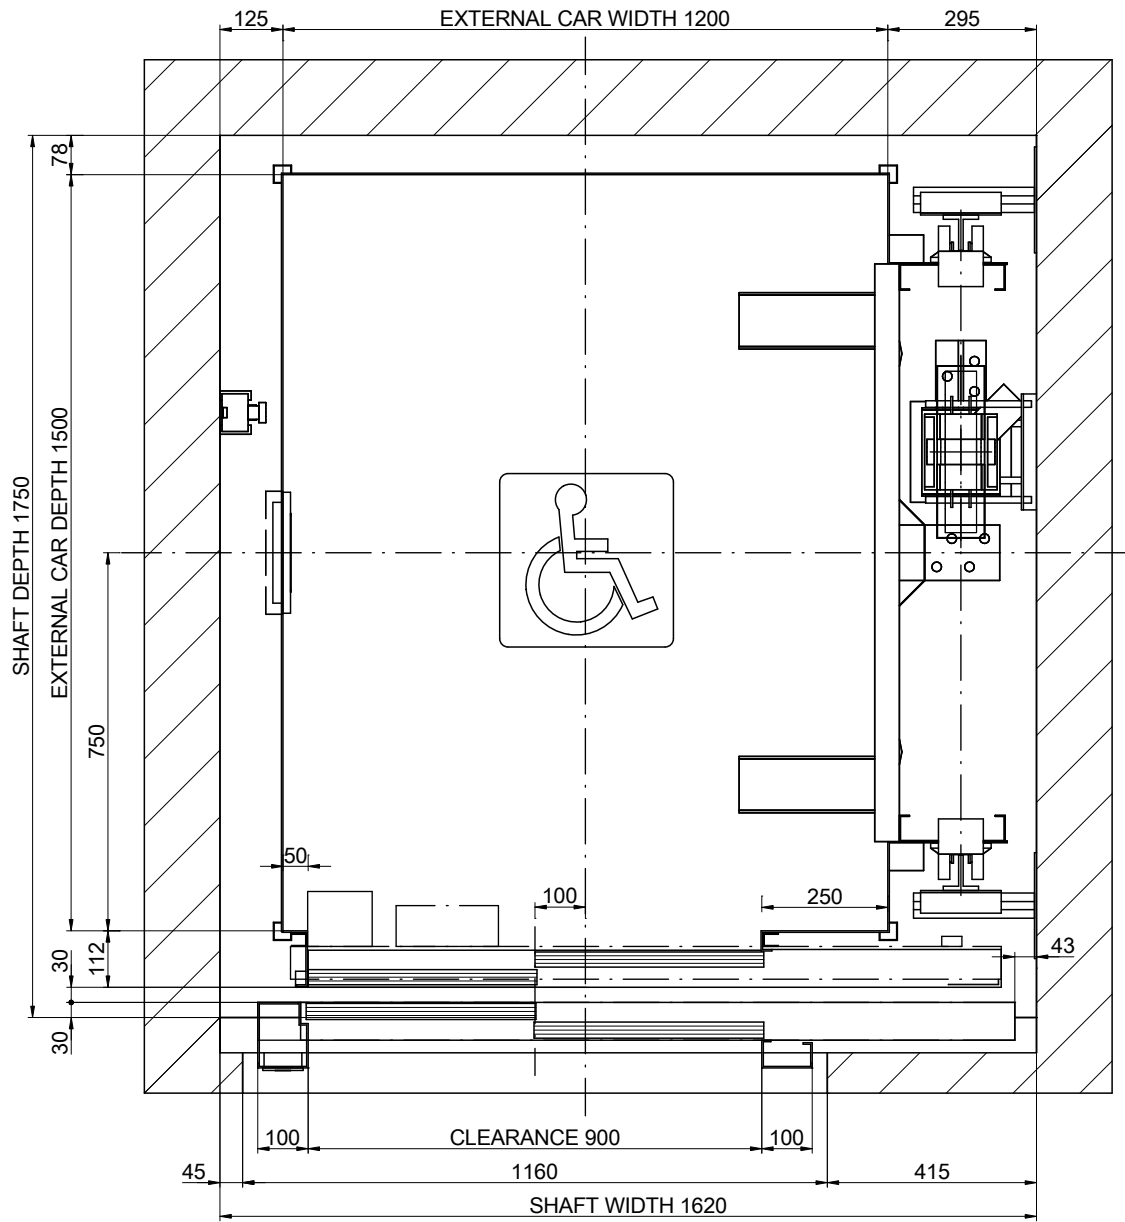

# 01B-PLAN VIEW




SCALE[\*]: 1:15

## NOMENCLATURE

CC: Car ceiling connection box  
MI: Inspection control station

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	2/8		
MODEL LIFT:				REFERENCE:	
MP H				MPHLATERAL800C_EN	
CAPACITY: [N° PERSONS]			10	CLIENT:	
NOMINAL LOAD: [kg]			800	WORK SITUATION:	
SPEED: [m/s]			0.5		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		
				<b>MP LIFTS</b>	

# 02-SIDE VERTICAL SECTION

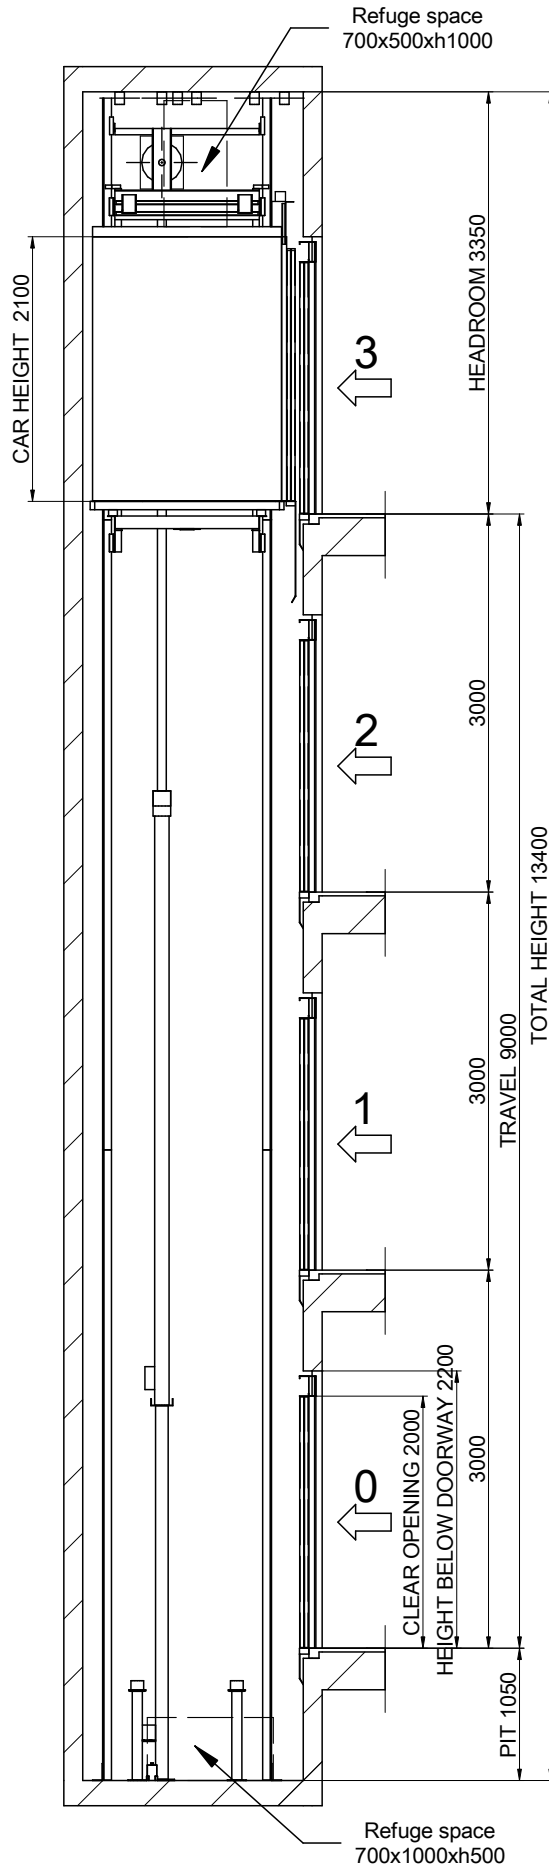

SCALE[\*]: 1:60


DRAWING		DATE		REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.
		2017		00	3/8	
MP		REFERENCE: MPHLATERAL800C_EN				
MODEL LIFT:		MP H				
CAPACITY: [N° PERSONS]		10				
NOMINAL LOAD: [kg]		800				
SPEED: [m/s]		0.5				
FREQUENCY: [Hz]		50				
TENSION: [V]		380V [Three-phase]				
CLIENT: WORK SITUATION:						MP LIFTS

Flat and levelled floor, protected against water leaking.  
 [EN81-20:2014 5.2.1.9]  
 Foresee pit access device  
 [EN81-20:2014 5.2.2.4]  
 Stop device  
 [EN81-20:2014 5.2.1.5.1. a]  
 Inspection control station.  
 [EN81-20:2014 5.2.1.5.1. b]  
 Power supply  
 [EN81-20:2014 5.2.1.5.1. c]  
 Light switch  
 commuted with the cabinet.  
 [EN81-20:2014 5.2.1.5.1. d]




# 04-BEAM AND LIFTING HOOKS


POSITION OF REMOVABLE LIFTING HOOKS ABLE TO SUPPORT  
2000 kg EACH ONE SUPPLIED BY CONSTRUCTOR  
(RECOMMENDED POSITION LOADHOOKS)

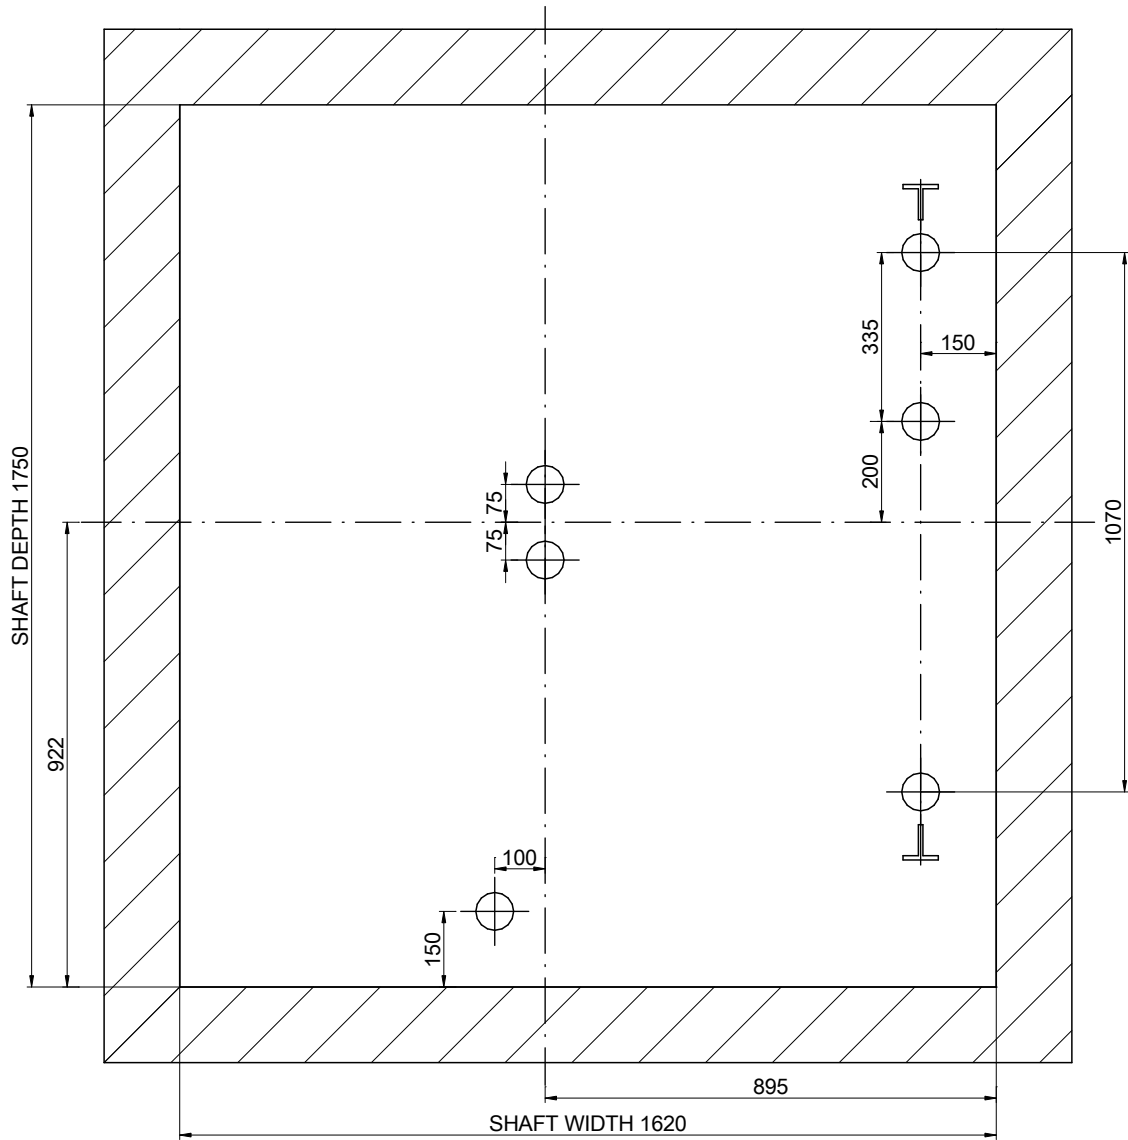

SCALE[\*]: 1:15

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	4/8	REFERENCE: MPHLATERAL800C_EN	
MODEL LIFT:				CLIENT: WORK SITUATION:	<b>MP LIFTS</b>
<b>MP H</b>					
CAPACITY: [N° PERSONS]			10		
NOMINAL LOAD: [kg]			800		
SPEED: [m/s]			0.5		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]			

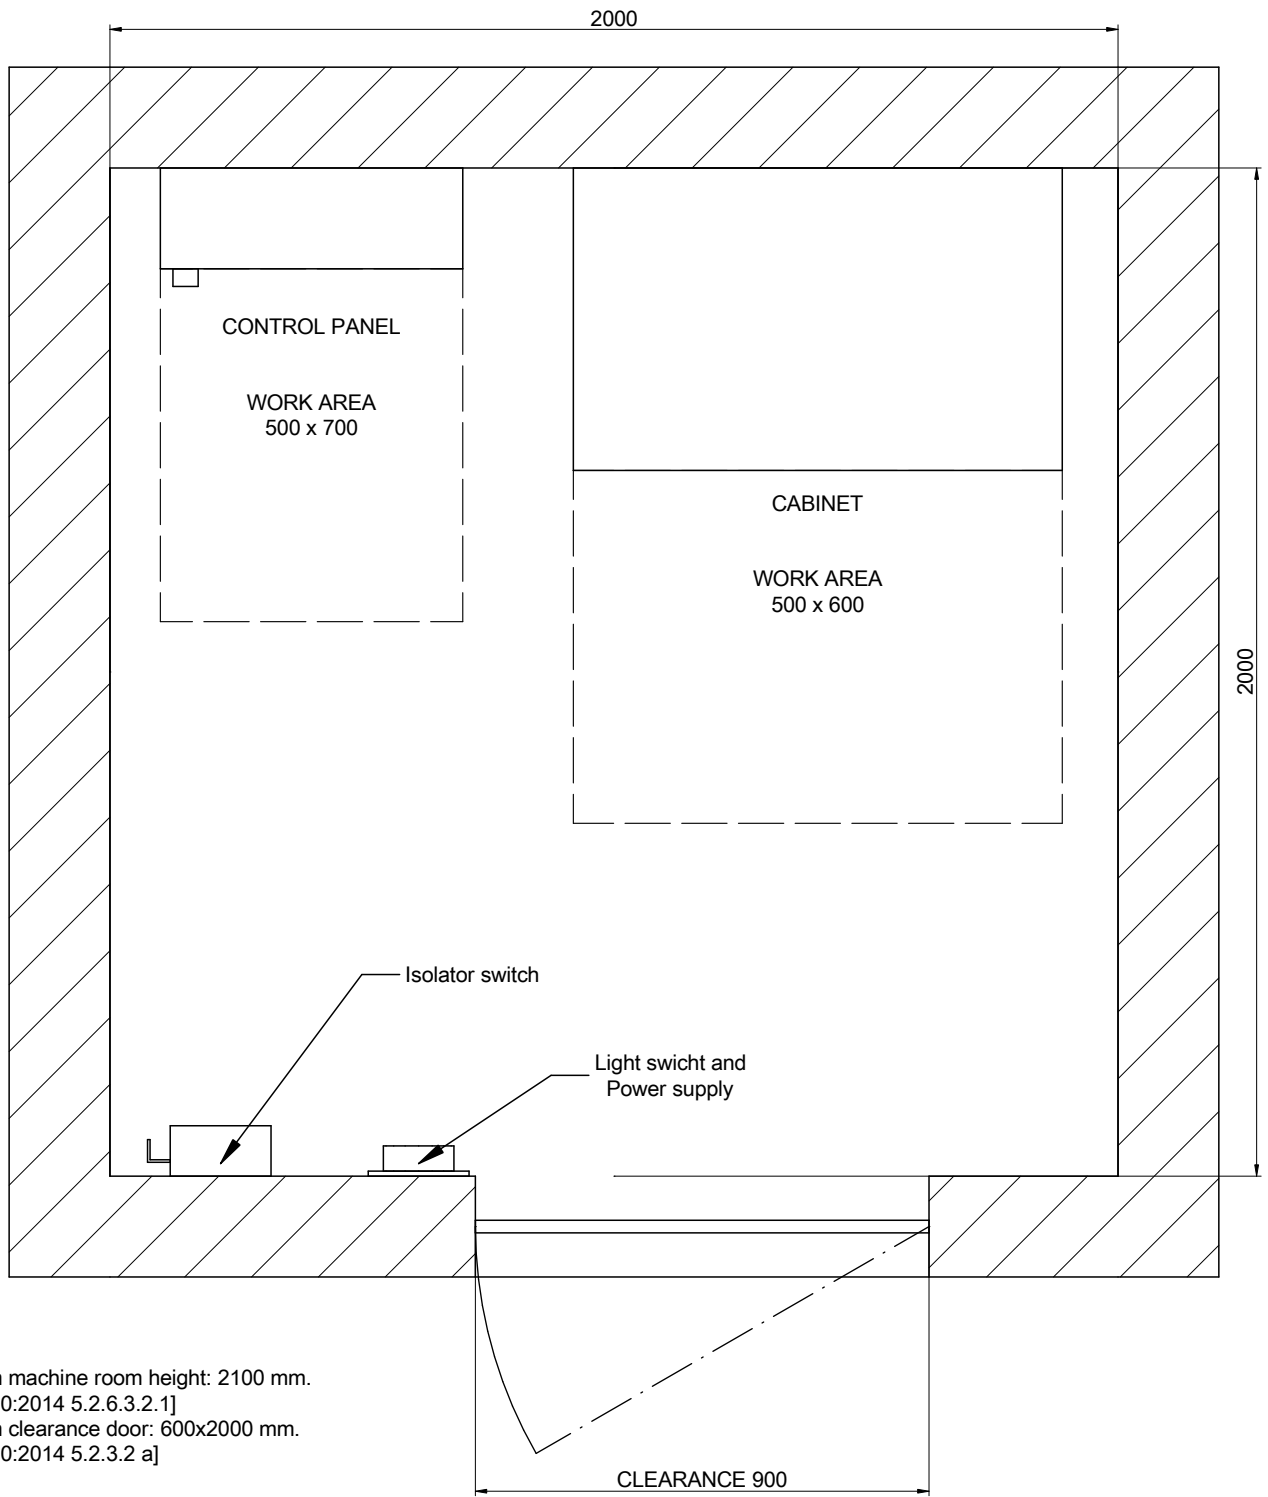

# 04B-MACHINE ROOM




Minimum machine room height: 2100 mm.  
 [EN 81-20:2014 5.2.6.3.2.1]  
 Minimum clearance door: 600x2000 mm.  
 [EN 81-20:2014 5.2.3.2 a]

Machine room location:  
 Machine room located in floor level:  
 [3] Distance controller/shaft:  
 Cylinder oil entrance location: 0


SCALE[\*]: 1:15


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	5/8	REFERENCE: MPHLATERAL800C_EN	
MODEL LIFT:				CLIENT: WORK SITUATION:	
MP H					
CAPACITY: [N° PERSONS]			10		
NOMINAL LOAD: [kg]			800		
SPEED: [m/s]			0.5		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

# 05-PIT LAYOUT


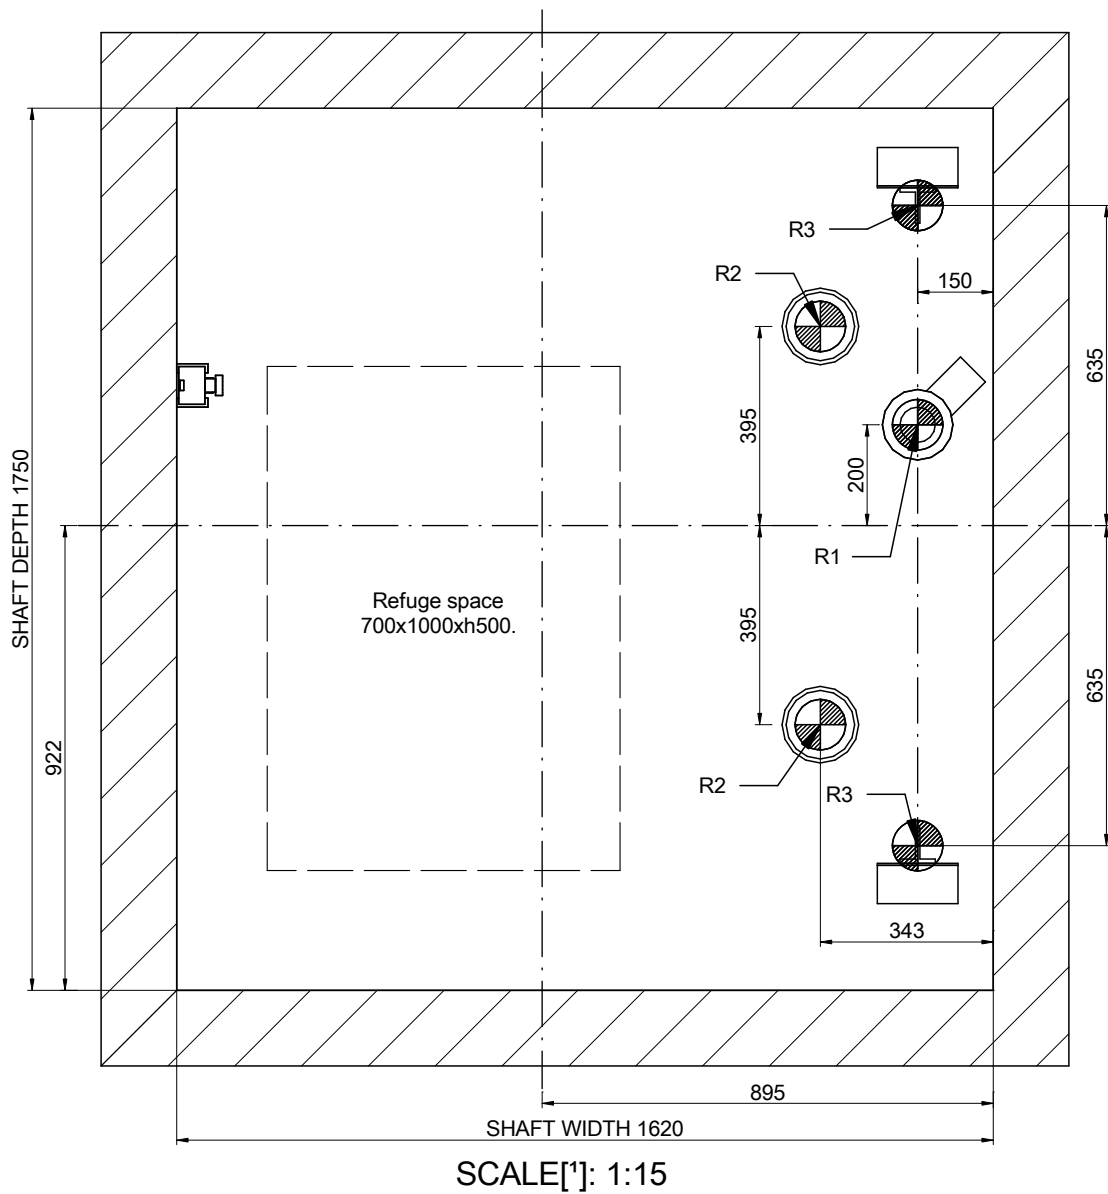



REACTIONS [N] [max.]			
R1	55000	R2	32500
R3	26000		
Sx	8000	Sy	1500




DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	6/8	REFERENCE: MPHLATERAL800C_EN	
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP H					
CAPACITY: [N° PERSONS]		10		<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]		800			
SPEED: [m/s]		0.5			
FREQUENCY: [Hz]		50			
TENSION: [V]		380V [Three-phase]			

# 06-DOOR HOLE DETAIL

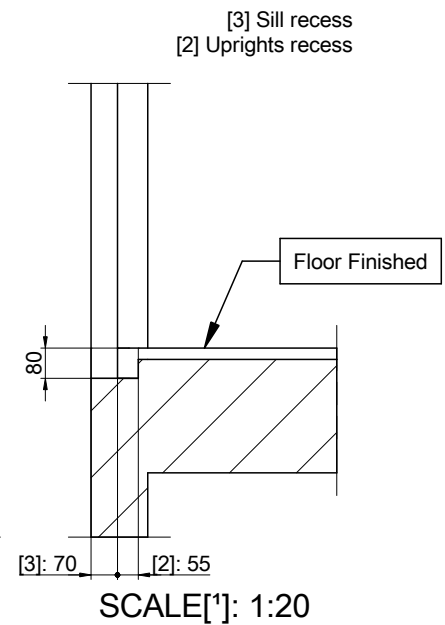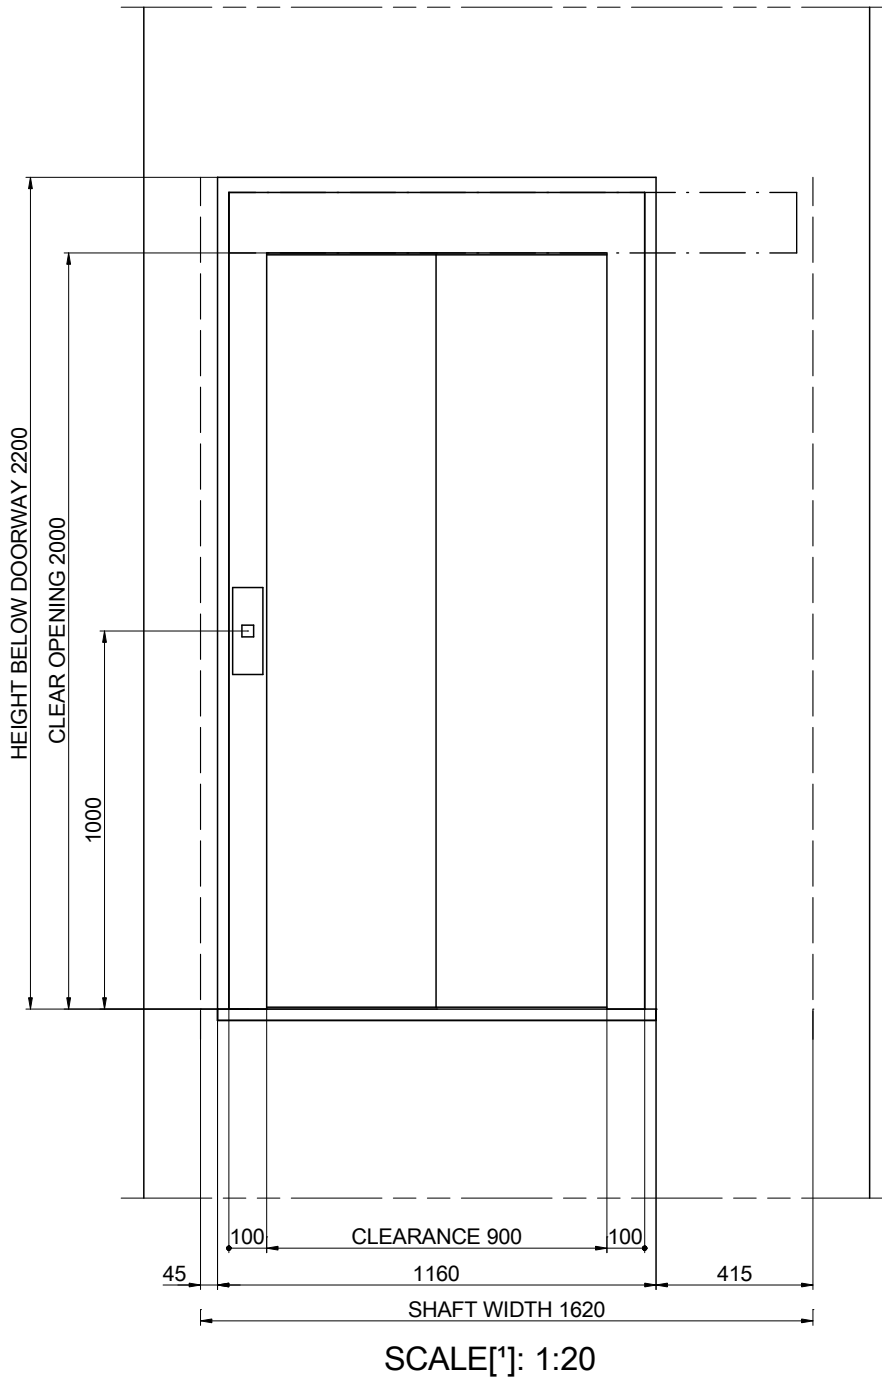



DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	7/8	REFERENCE: MPHLATERAL800C_EN	
MODEL LIFT:				CLIENT:	
MP H					
CAPACITY: [N° PERSONS]			10	WORK SITUATION:	
NOMINAL LOAD: [kg]			800		
SPEED: [m/s]			0.5		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		
				<b>MP LIFTS</b>	
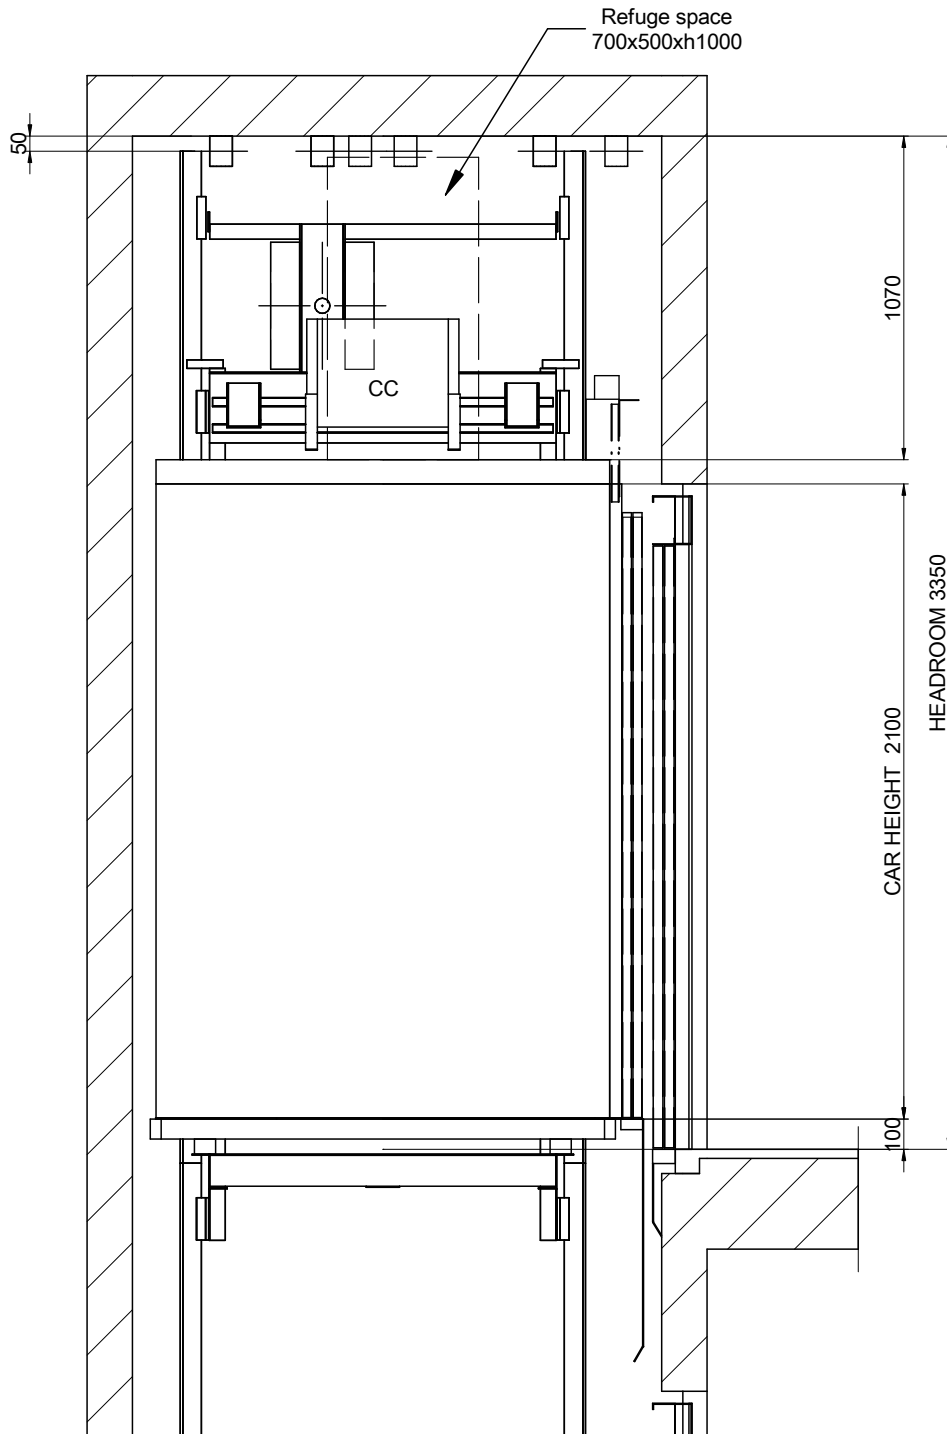
# 07-HEADROOM



SCALE[\*]: 1:25

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.		
MP	2017	00	8/8			
MODEL LIFT:				REFERENCE:		
MP H				MPLATERAL800C_EN		
CAPACITY: [N° PERSONS]				10		CLIENT:
NOMINAL LOAD: [kg]				800		WORK SITUATION:
SPEED: [m/s]				0.5		
FREQUENCY: [Hz]				50		
TENSION: [V]				380V [Three-phase]		<b>MP LIFTS</b>