

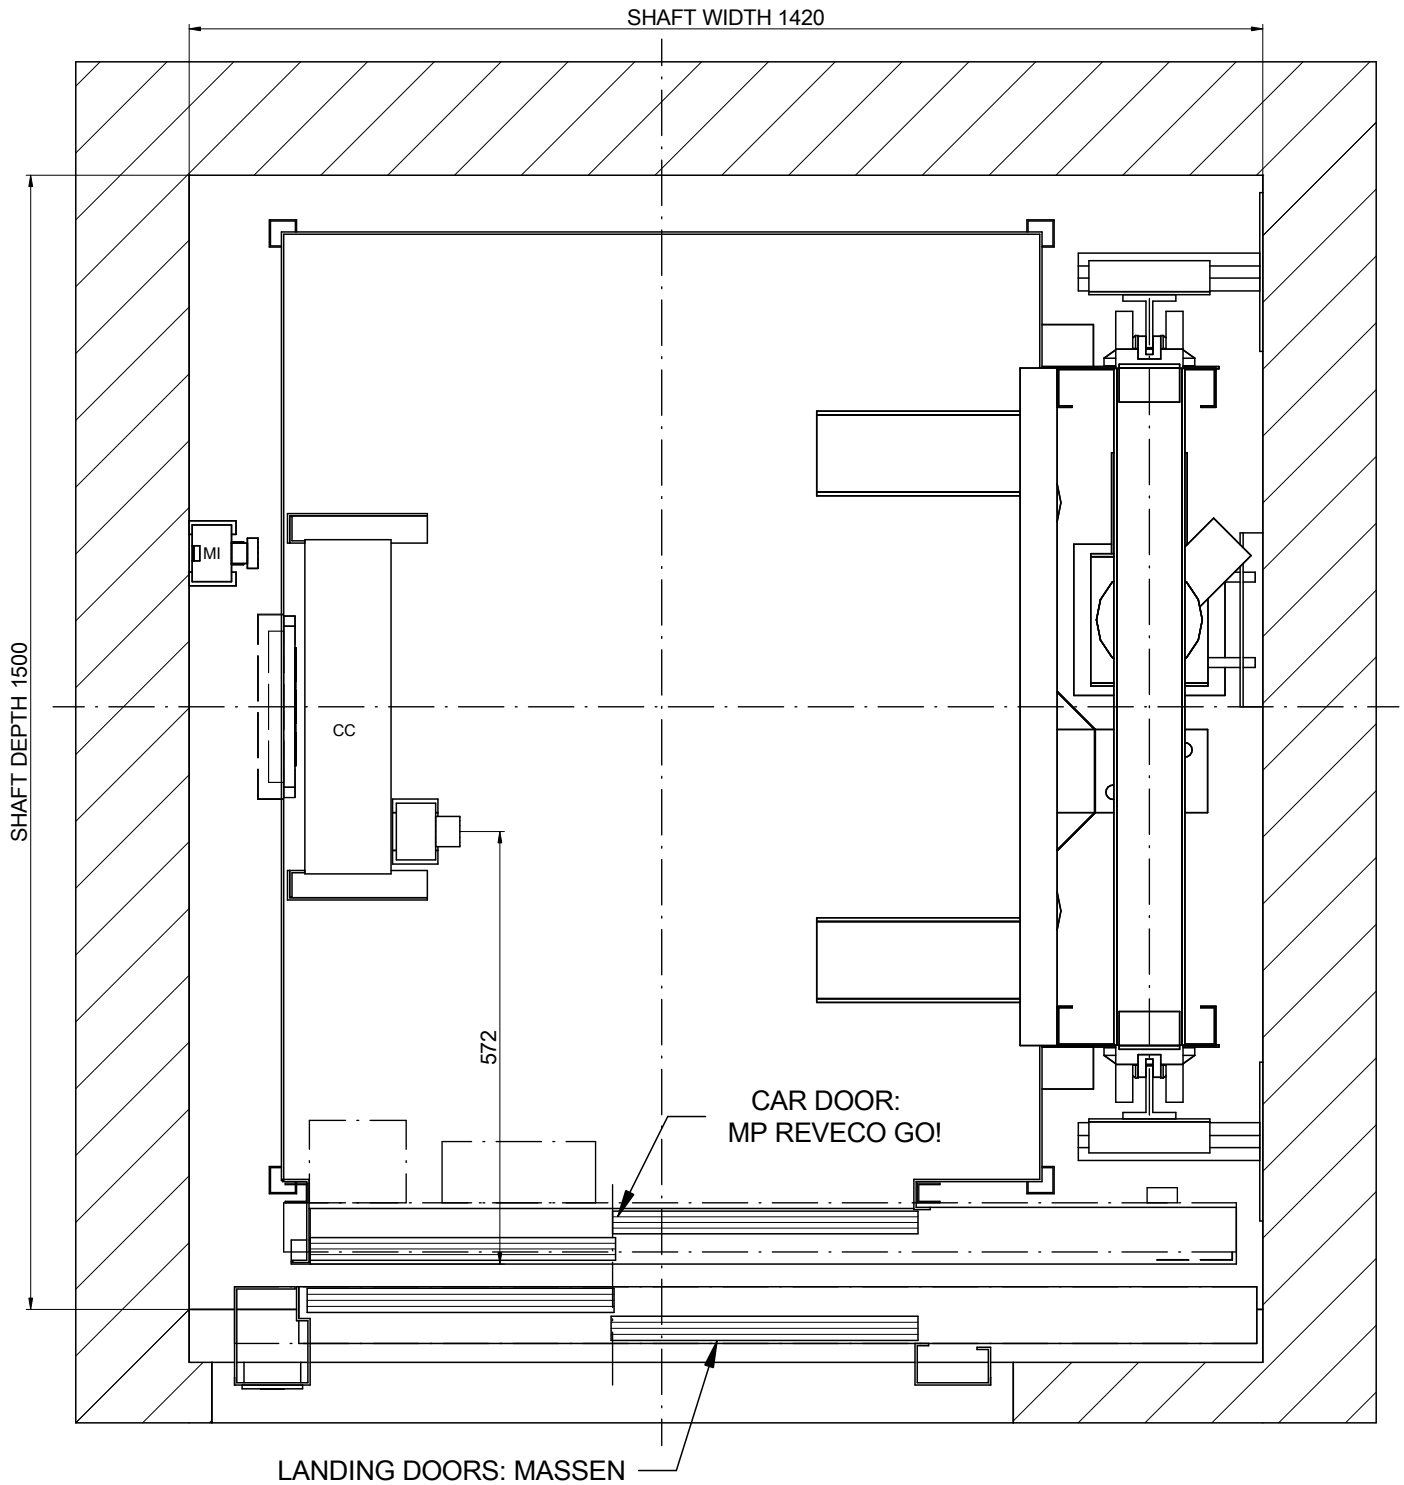


01-PLAN VIEW



DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPHLATERAL480C_EN	
MP	2017	00	1/8		
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP H					
CAPACITY: [N° PERSONS]			6	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			480		
SPEED: [m/s]			0.63		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		


01B-PLAN VIEW

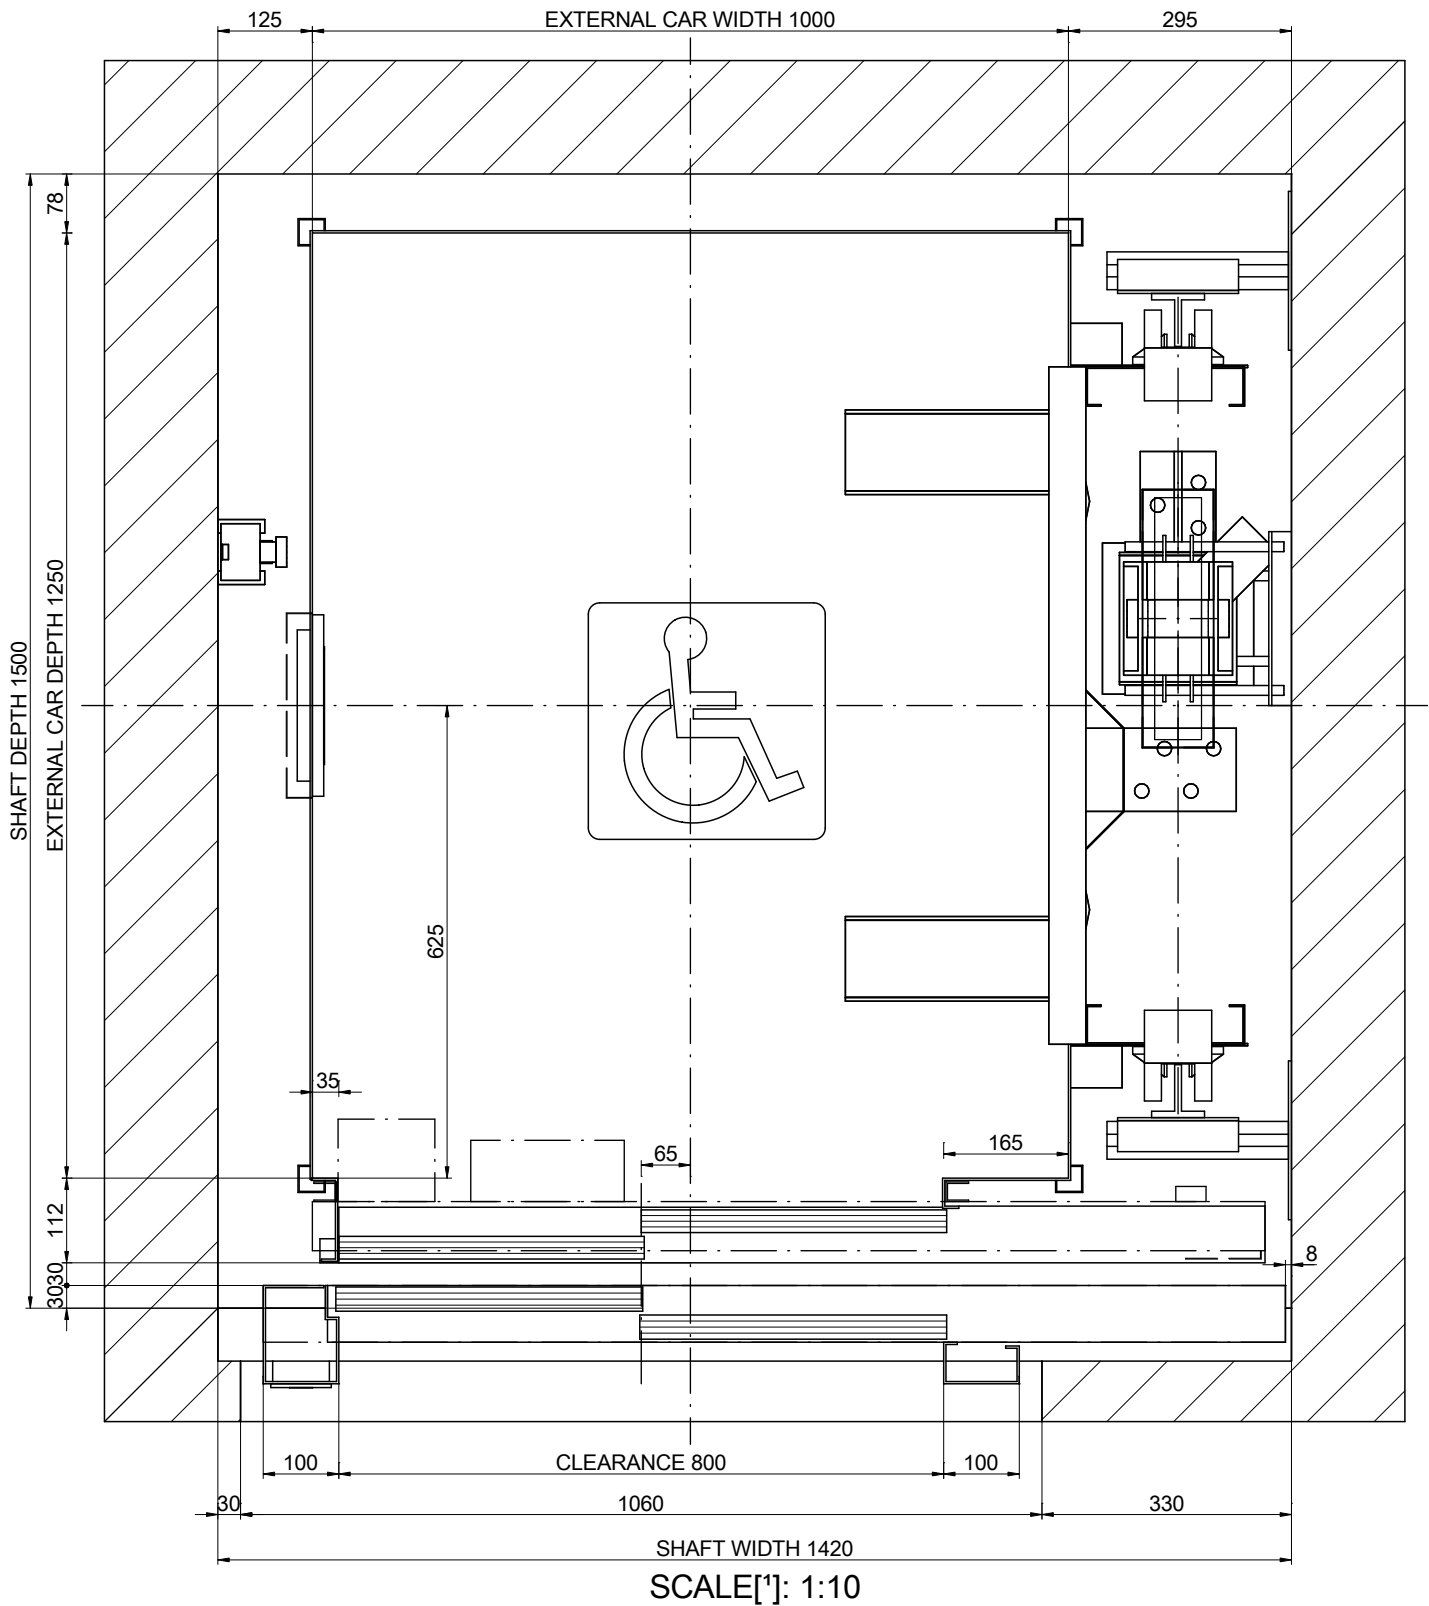


NOMENCLATURE

CC: Car ceiling connection box
MI: Inspection control station


SCALE[*]: 1:10

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	2/8		
MODEL LIFT:				REFERENCE:	CLIENT:
MP H				MPLATERAL480C_EN	
CAPACITY: [N° PERSONS]			6	WORK SITUATION:	
NOMINAL LOAD: [kg]			480		
SPEED: [m/s]			0.63		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]	MP LIFTS	

02-SIDE VERTICAL SECTION

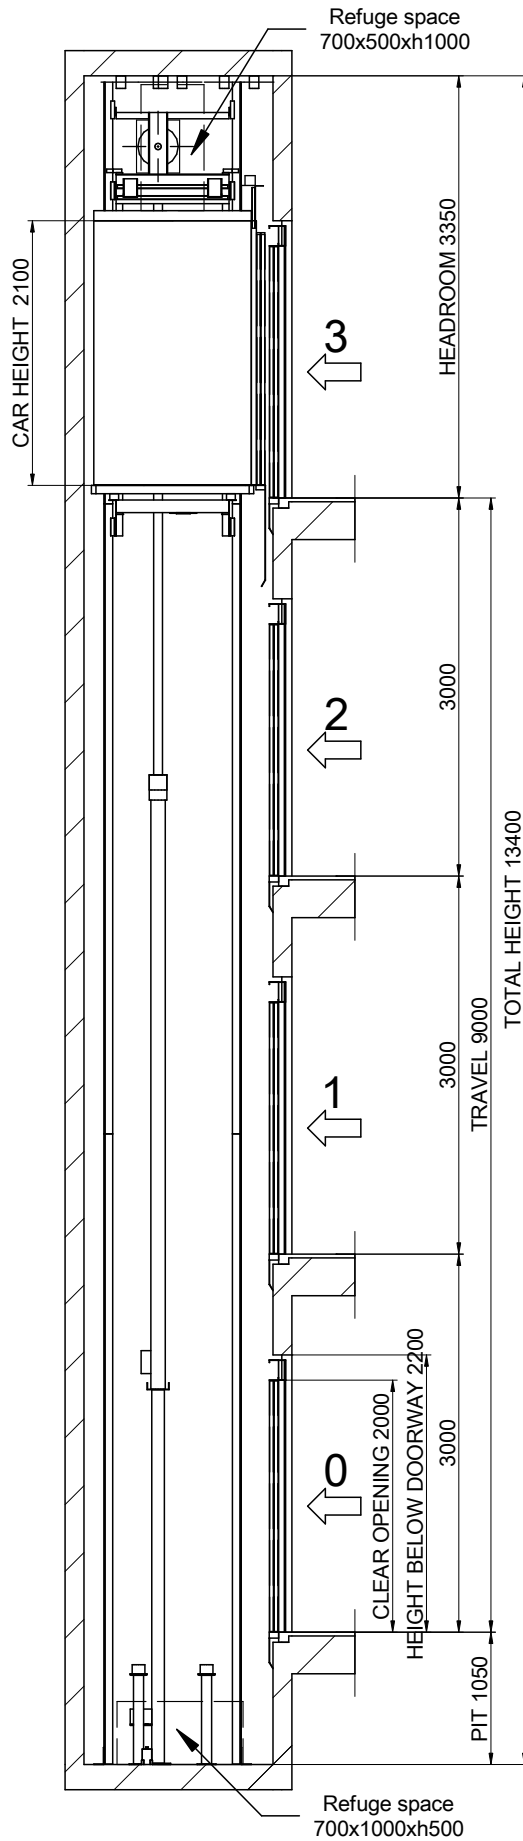


SCALE[*]: 1:60


					
DRAWING	MP	DATE	2017	REV.	00
SHEET	3/8	REFERENCE: MPH LATERAL 480C_EN			
MODEL LIFT:	MP H				
CAPACITY: [N° PERSONS]	6				
NOMINAL LOAD: [kg]	480				
SPEED: [m/s]	0.63				
FREQUENCY: [Hz]	50				
TENSION: [V]	380V [Three-phase]				
				CLIENT: WORK SITUATION:	
					MP LIFTS

Flat and levelled floor, protected against water leaking.
 [EN81-20:2014 5.2.1.9]
 Foresee pit access device
 [EN81-20:2014 5.2.2.4]
 Stop device
 [EN81-20:2014 5.2.1.5.1. a]
 Inspection control station.
 [EN81-20:2014 5.2.1.5.1. b]
 Power supply
 [EN81-20:2014 5.2.1.5.1. c]
 Light switch
 commuted with the cabinet.
 [EN81-20:2014 5.2.1.5.1. d]


04-BEAM AND LIFTING HOOKS

POSITION OF REMOVABLE LIFTING HOOKS ABLE TO SUPPORT
1000 kg EACH ONE SUPPLIED BY CONSTRUCTOR
(RECOMMENDED POSITION LOADHOOKS)

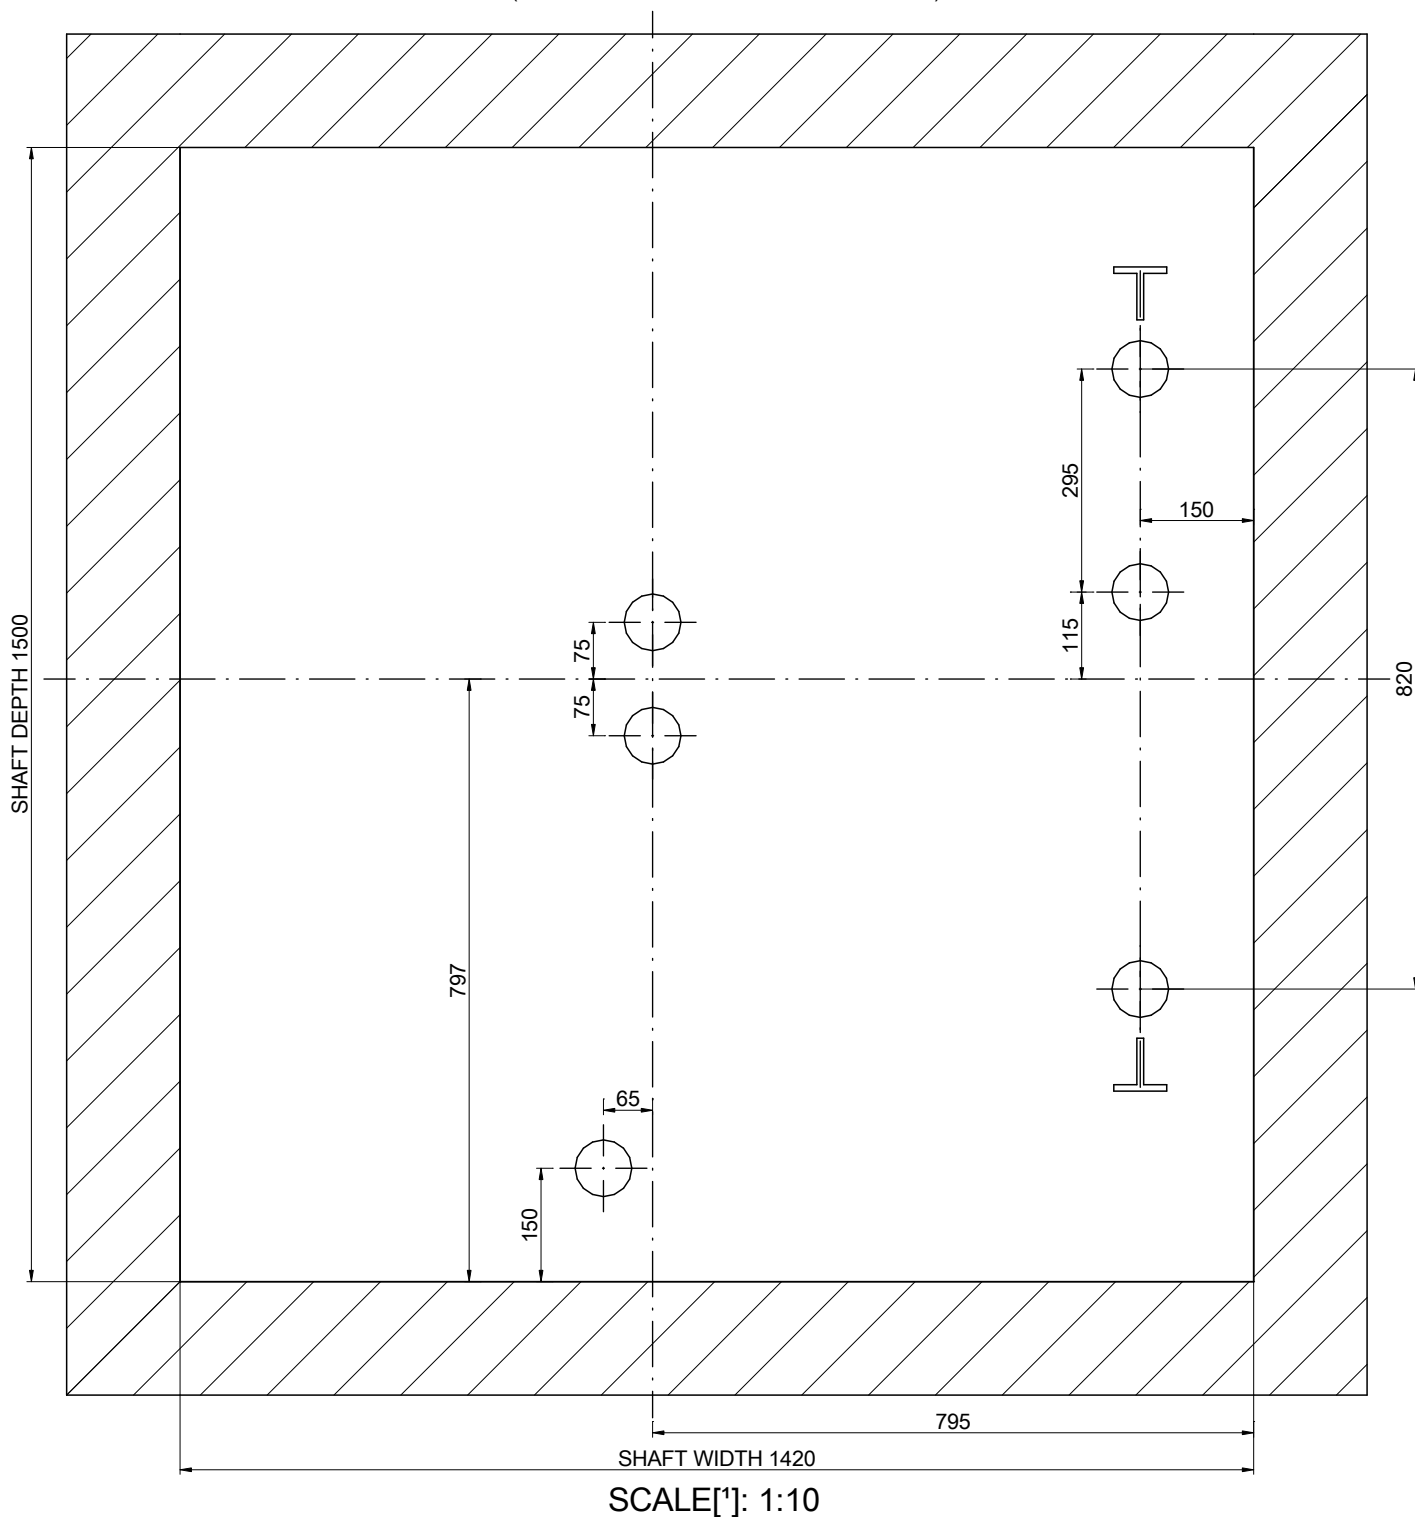

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPHLATERAL480C_EN	
MP	2017	00	4/8		
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP H					
CAPACITY: [N° PERSONS]			6	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			480		
SPEED: [m/s]			0.63		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		


04B-MACHINE ROOM

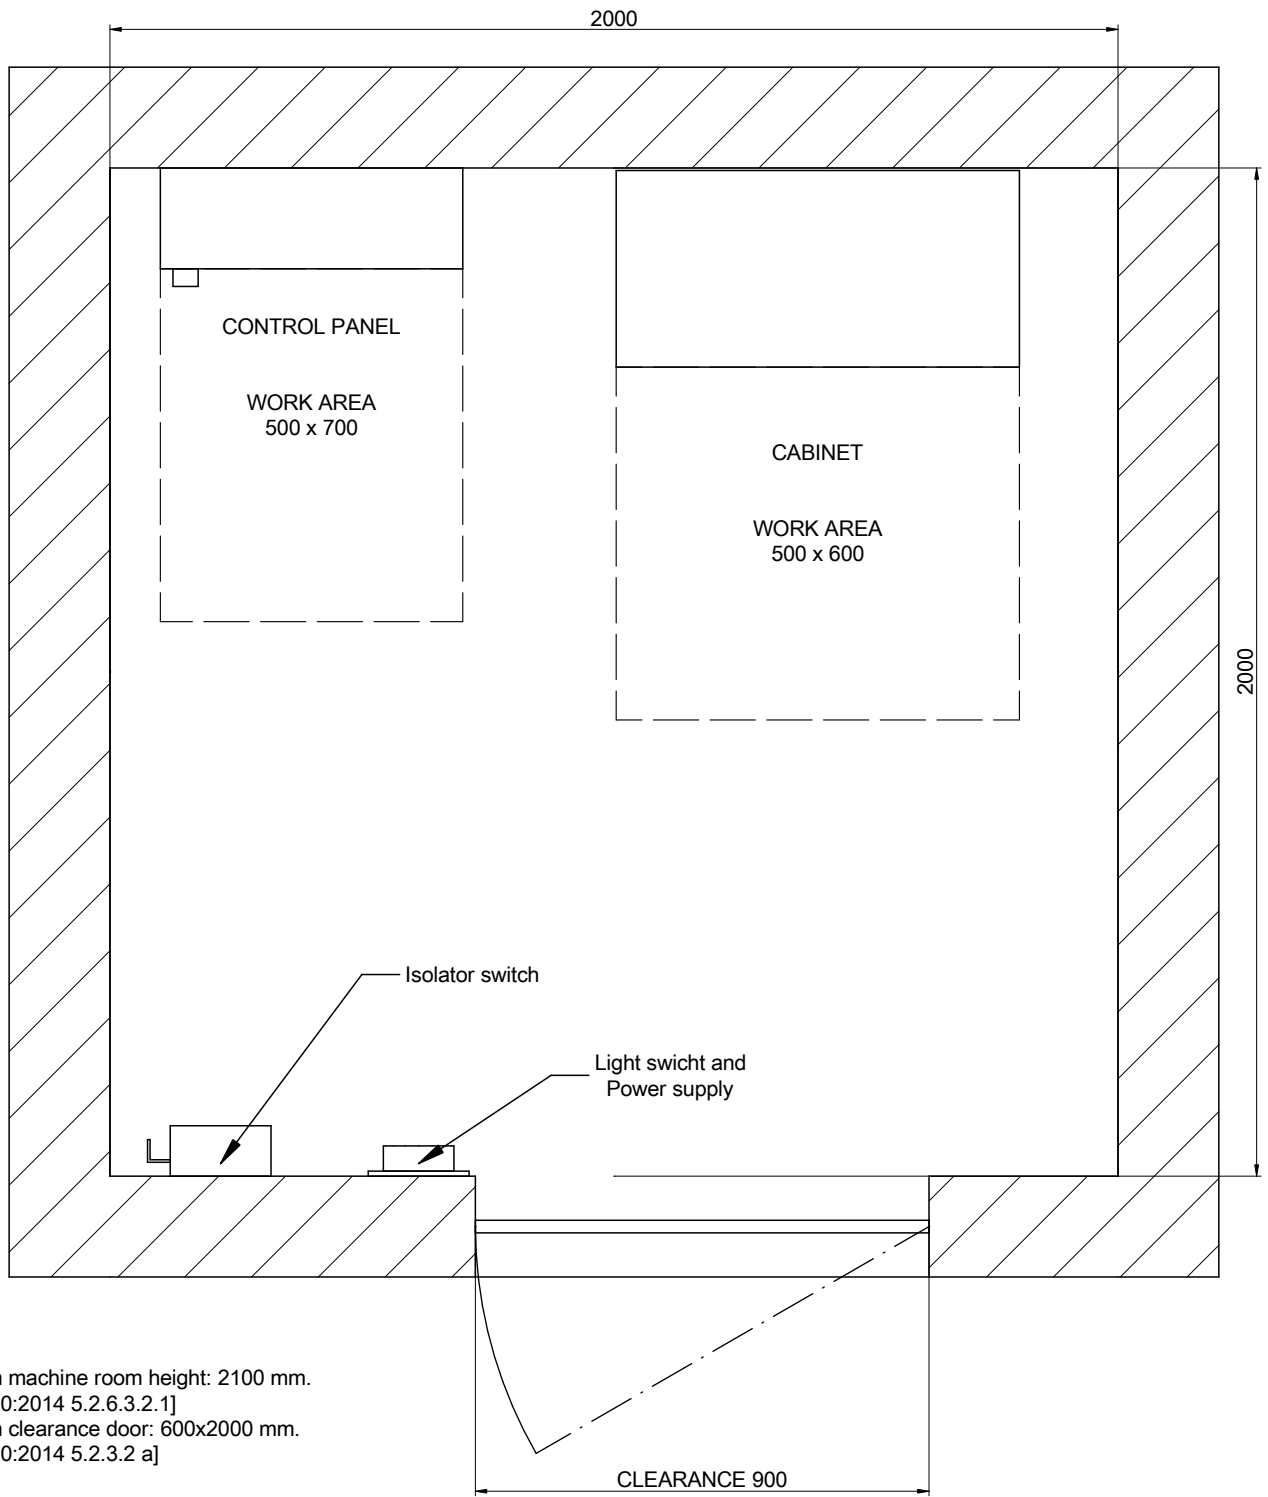


Minimum machine room height: 2100 mm.
[EN 81-20:2014 5.2.6.3.2.1]
Minimum clearance door: 600x2000 mm.
[EN 81-20:2014 5.2.3.2 a]

Machine room location:
Machine room located in floor level:
[3] Distance controller/shaft:
Cylinder oil entrance location: 0

SCALE[*]: 1:15

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	5/8	REFERENCE: MPHLATERAL480C_EN	
MODEL LIFT:				CLIENT: WORK SITUATION:	<p>MP LIFTS</p>
MP H					
CAPACITY: [N° PERSONS]			6		
NOMINAL LOAD: [kg]			480		
SPEED: [m/s]			0.63		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]			

05-PIT LAYOUT

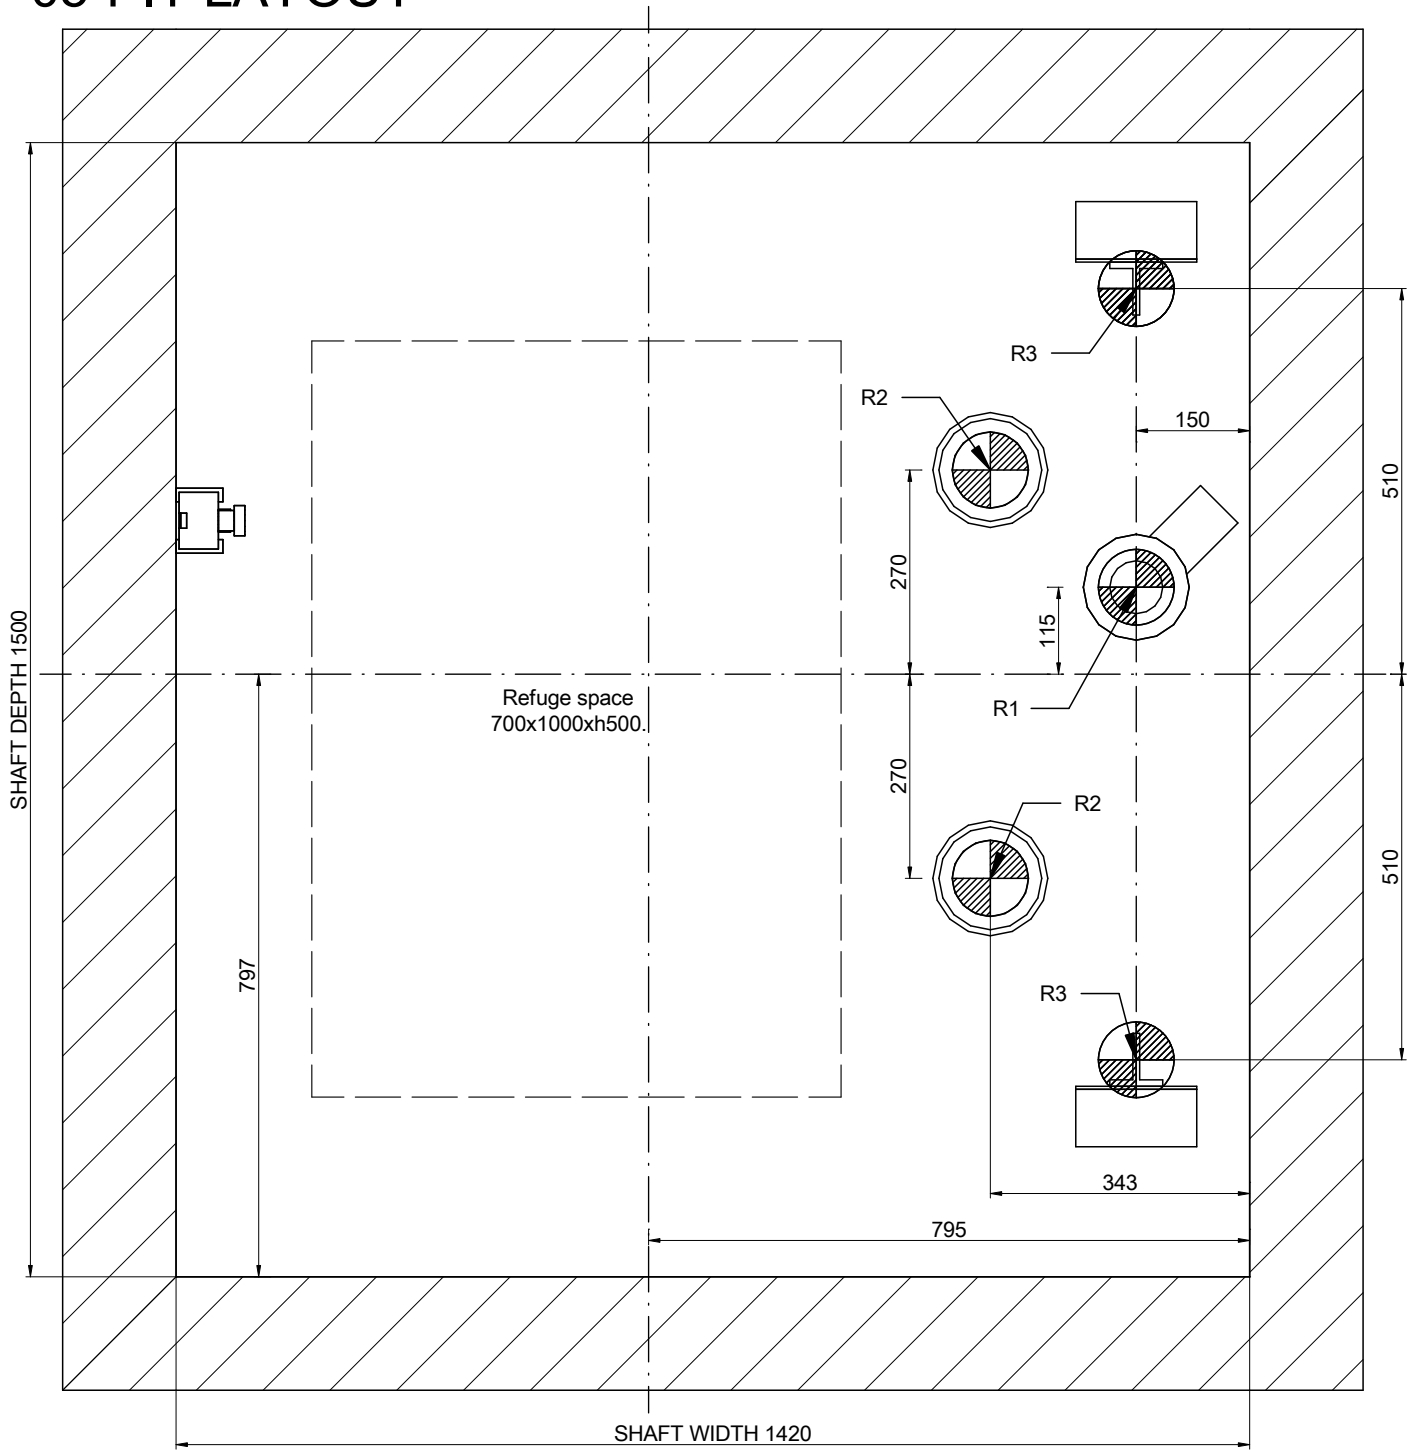

SCALE[*]: 1:10

REACTIONS [N] [max.]			
R1	34000	R2	22000
R3	18000		
Sx	4100	Sy	1300

DRAWING	DATE	REV.	SHEET
MP	2017	00	6/8
MODEL LIFT:			
MP H			
CAPACITY: [N° PERSONS]			6
NOMINAL LOAD: [kg]			480
SPEED: [m/s]			0.63
FREQUENCY: [Hz]			50
TENSION: [V]		380V [Three-phase]	

[*] Unbounded dimensions in drawings are indicative and not binding.



REFERENCE:
MPHLATERAL480C_EN


CLIENT:
WORK SITUATION:




MP LIFTS

06-DOOR HOLE DETAIL

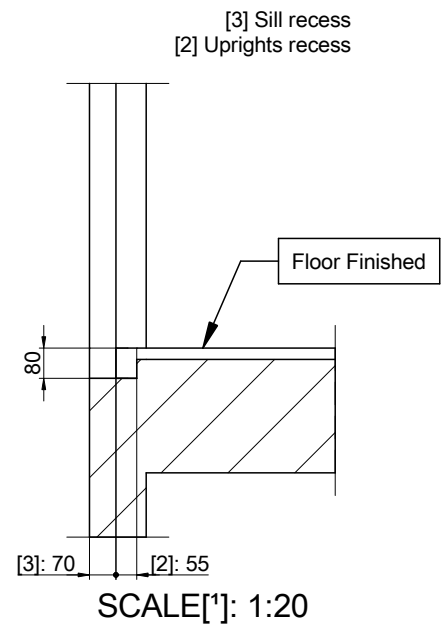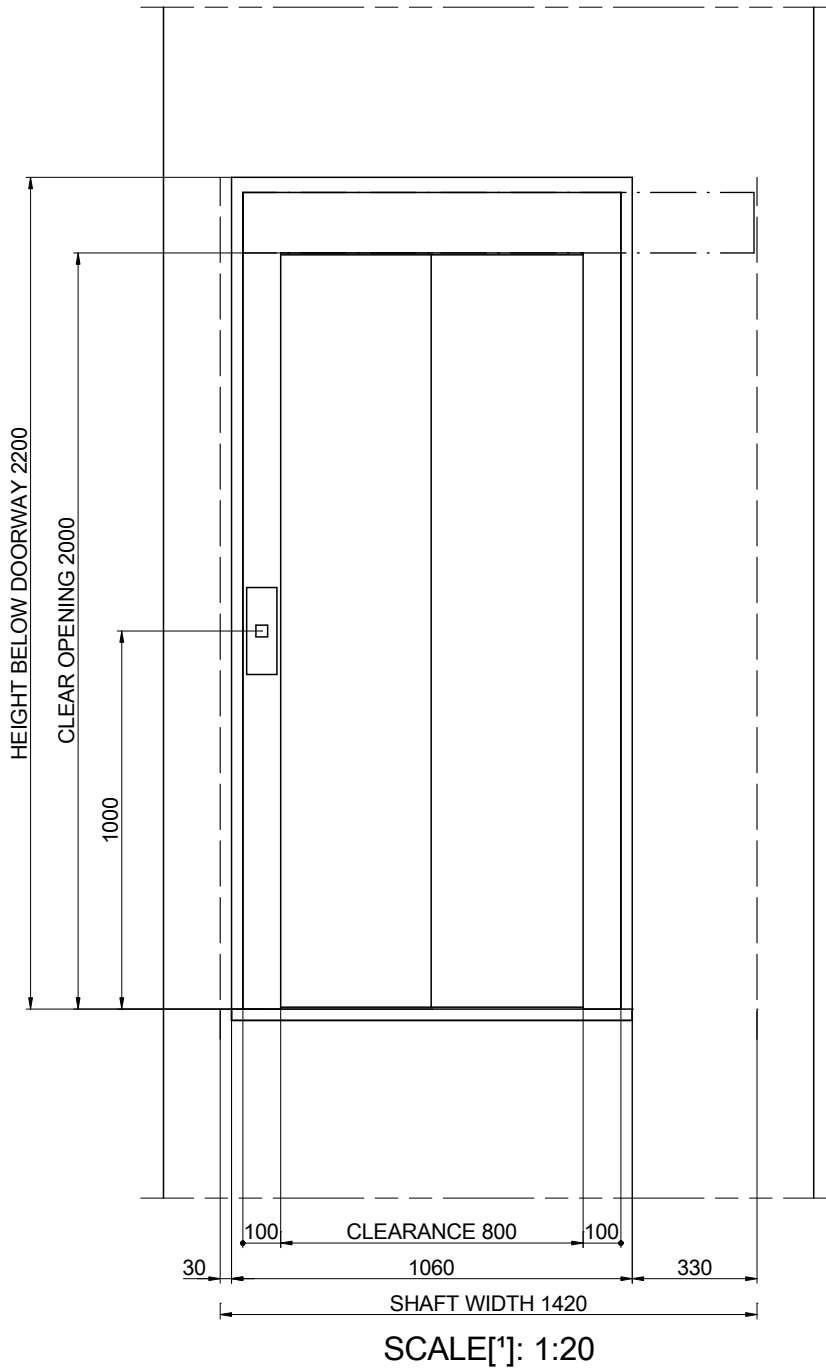


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	7/8	REFERENCE: MPHLATERAL480C_EN	
MODEL LIFT:				CLIENT: WORK SITUATION:	
MP H					
CAPACITY: [N° PERSONS]			6		
NOMINAL LOAD: [kg]			480		
SPEED: [m/s]			0.63		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]		MP LIFTS	

07-HEADROOM

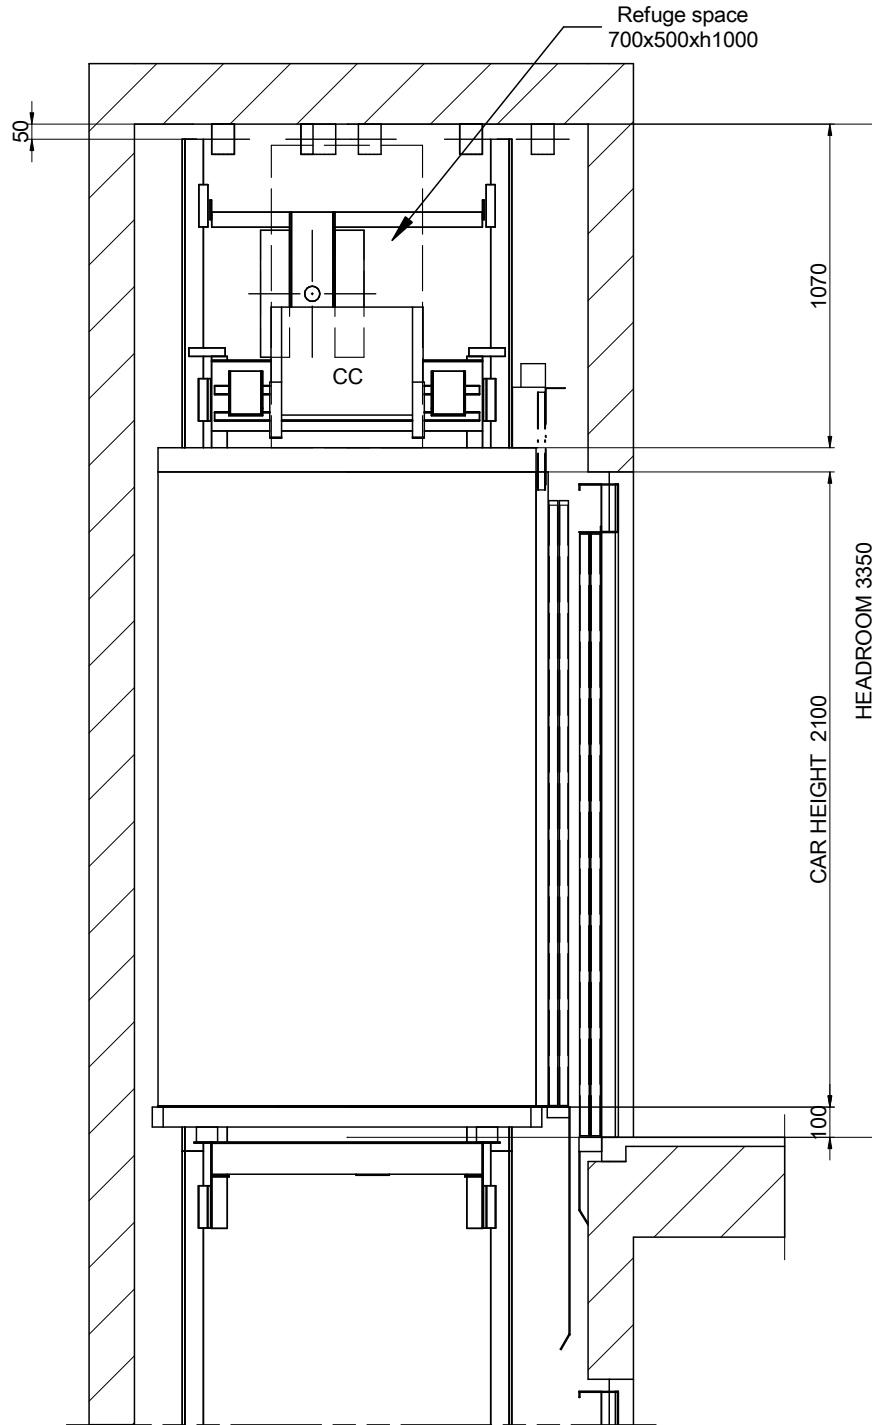

SCALE[*]: 1:25

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	8/8	REFERENCE: MPHLATERAL480C_EN	
MODEL LIFT:				CLIENT:	<p style="text-align: center; font-size: 24px; font-weight: bold;">MP LIFTS</p>
MP H				WORK SITUATION:	
CAPACITY: [N° PERSONS]			6		
NOMINAL LOAD: [kg]			480		
SPEED: [m/s]			0.63		
FREQUENCY: [Hz]			50		
TENSION: [V]		380V [Three-phase]			