

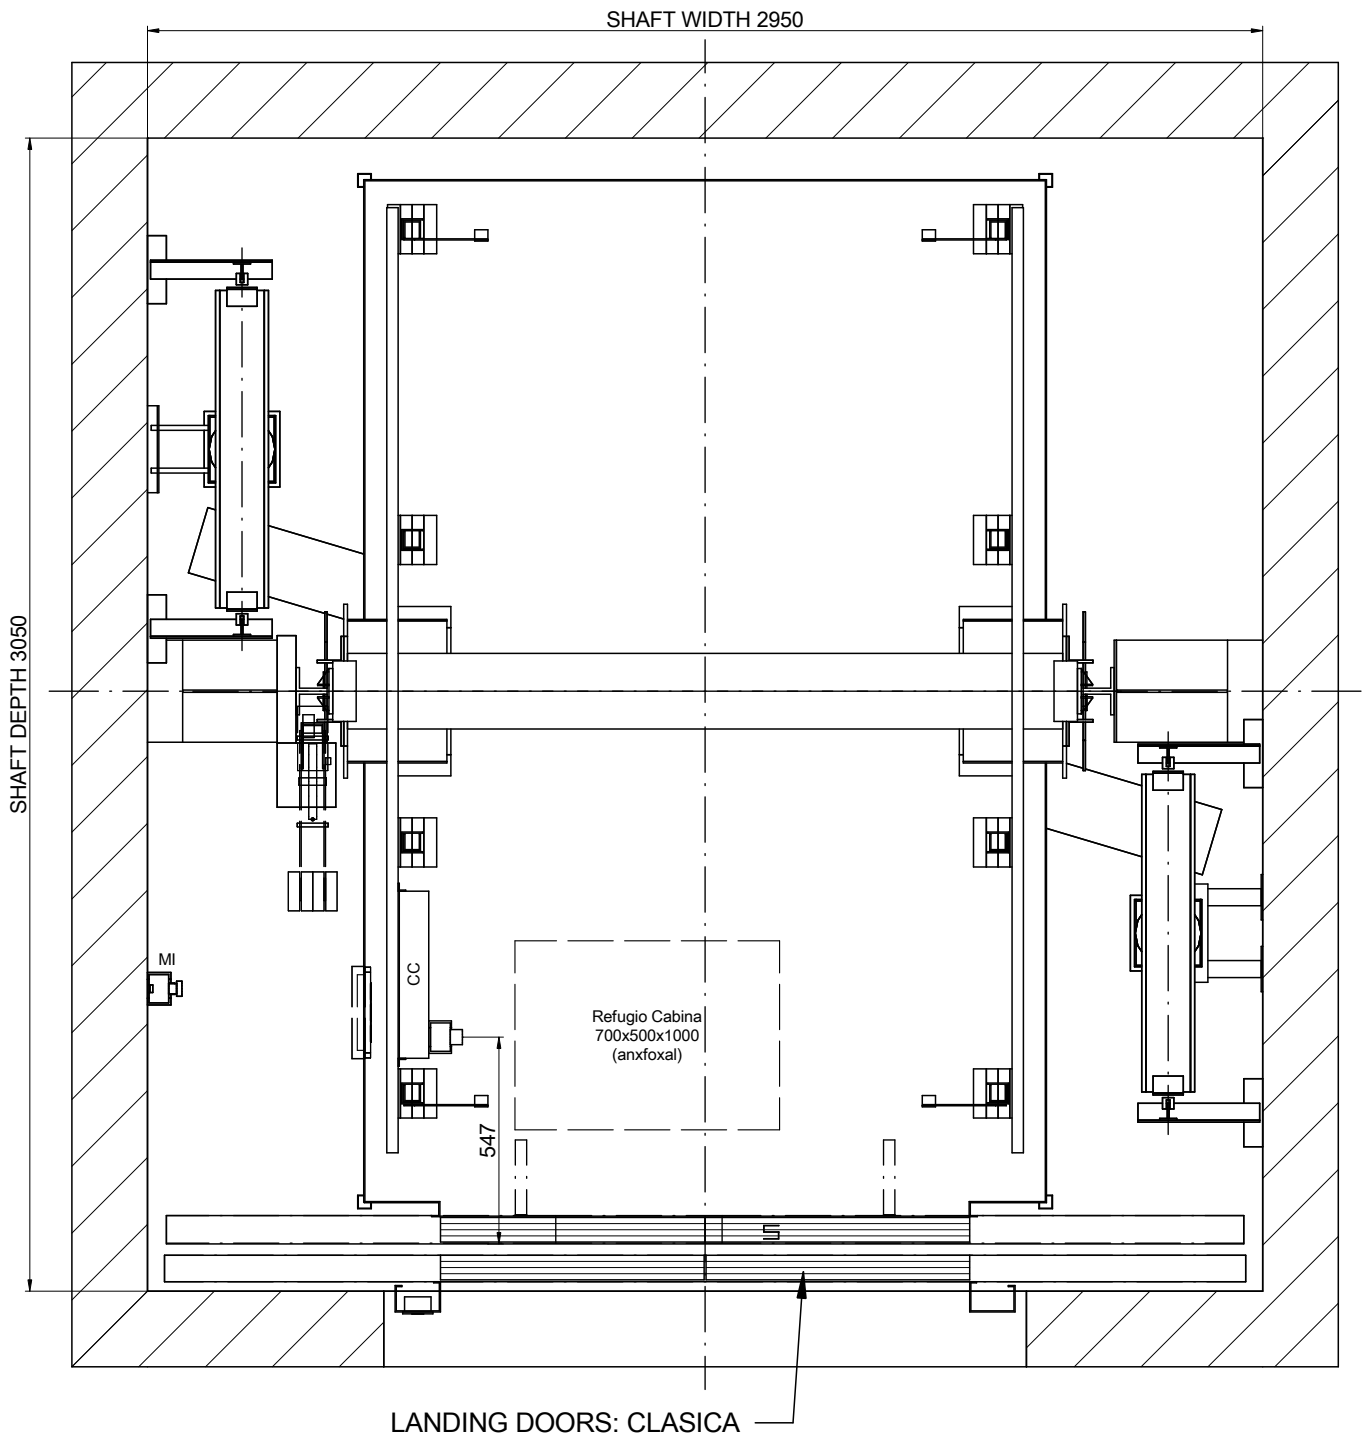


01-PLAN VIEW



DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPH_MONTACAMAS_2500C_EN	
MP	2017	00	1/8		
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP H					
CAPACITY: [N° PERSONS]		33		<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]		2500			
SPEED: [m/s]		0.5			
FREQUENCY: [Hz]		50			
TENSION: [V]		380V [Three-phase]			

01B-PLAN VIEW

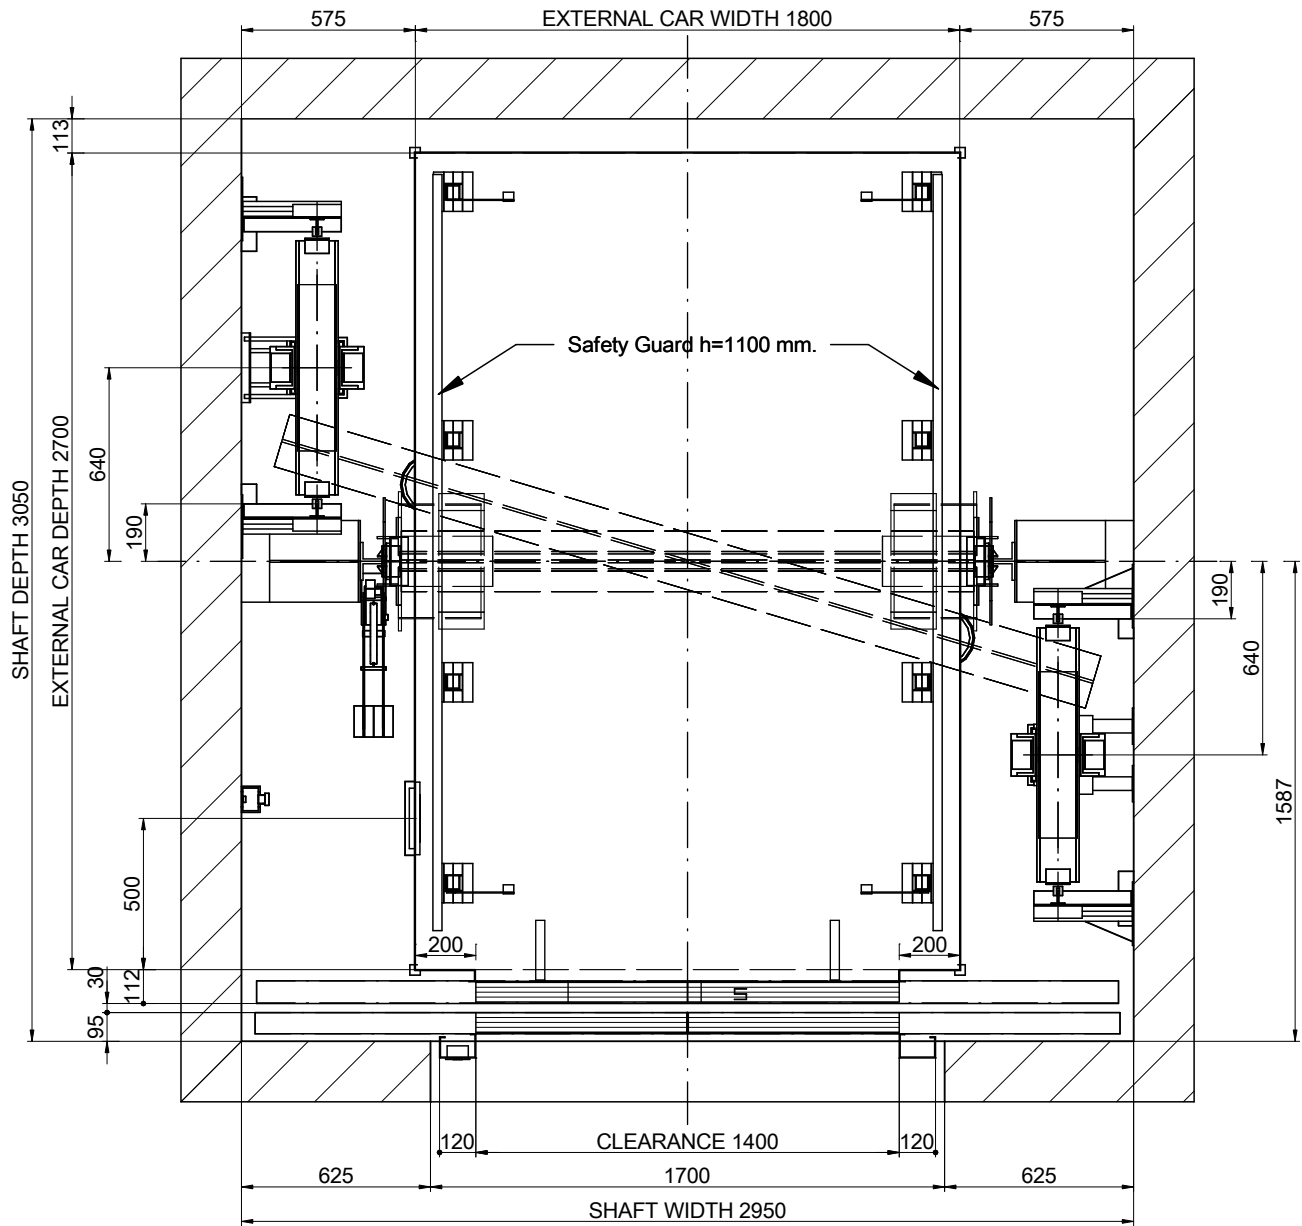


SCALE[*]: 1:20


NOMENCLATURE

CC: Car ceiling connection box

MI: Inspection control station

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	2/8	REFERENCE: MPH_MONTACAMAS_2500C_EN	
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP H					
CAPACITY: [N° PERSONS]			33	<p style="text-align: center; font-size: 24pt; font-weight: bold;">MP LIFTS</p>	
NOMINAL LOAD: [kg]			2500		
SPEED: [m/s]			0.5		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

02-SIDE VERTICAL SECTION

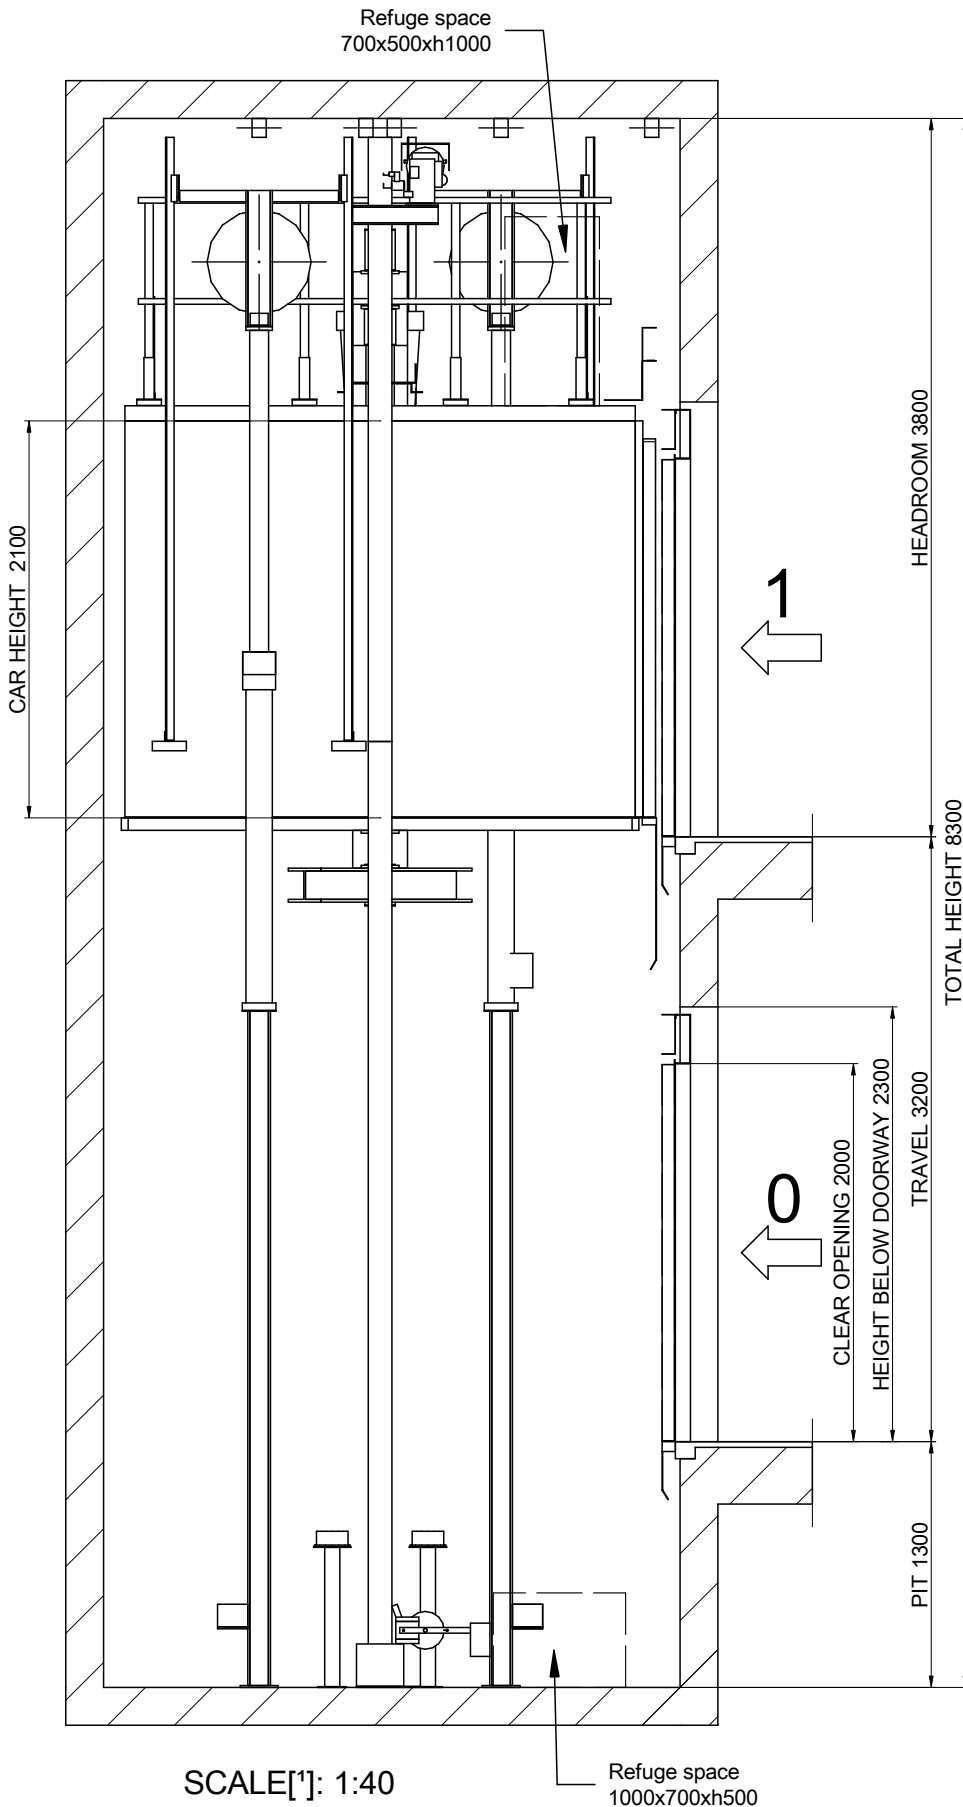


DRAWING		DATE		REV.	SHEET	MP	MP LIFTS
		2017	00	3/8			
MODEL LIFT:		MP H		CAPACITY: [N° PERSONS]		MPH_MONTACAMAS_2500C_EN	
		33		NOMINAL LOAD: [kg]		CLIENT:	
		2500		SPEED: [m/s]		WORK SITUATION:	
		0.5		FREQUENCY: [Hz]			
		50		TENSION: [V]			
		380V [Three-phase]					


Flat and levelled floor, protected against water leaking.
 [EN81-20:2014 5.2.1.9]
 Foresee pit access device
 [EN81-20:2014 5.2.2.4]
 Stop device
 [EN81-20:2014 5.2.1.5.1. a]
 Inspection control station.
 [EN81-20:2014 5.2.1.5.1. b]
 Power supply
 [EN81-20:2014 5.2.1.5.1. c]
 Light switch
 commuted with the cabinet.
 [EN81-20:2014 5.2.1.5.1. d]

MAX DISTANCE
 BETWEEN BRACKETS
 = 1500 mm


04-BEAM AND LIFTING HOOKS

POSITION OF REMOVABLE LIFTING HOOKS ABLE TO SUPPORT
3500 kg EACH ONE SUPPLIED BY CONSTRUCTOR
(RECOMMENDED POSITION LOADHOOKS)

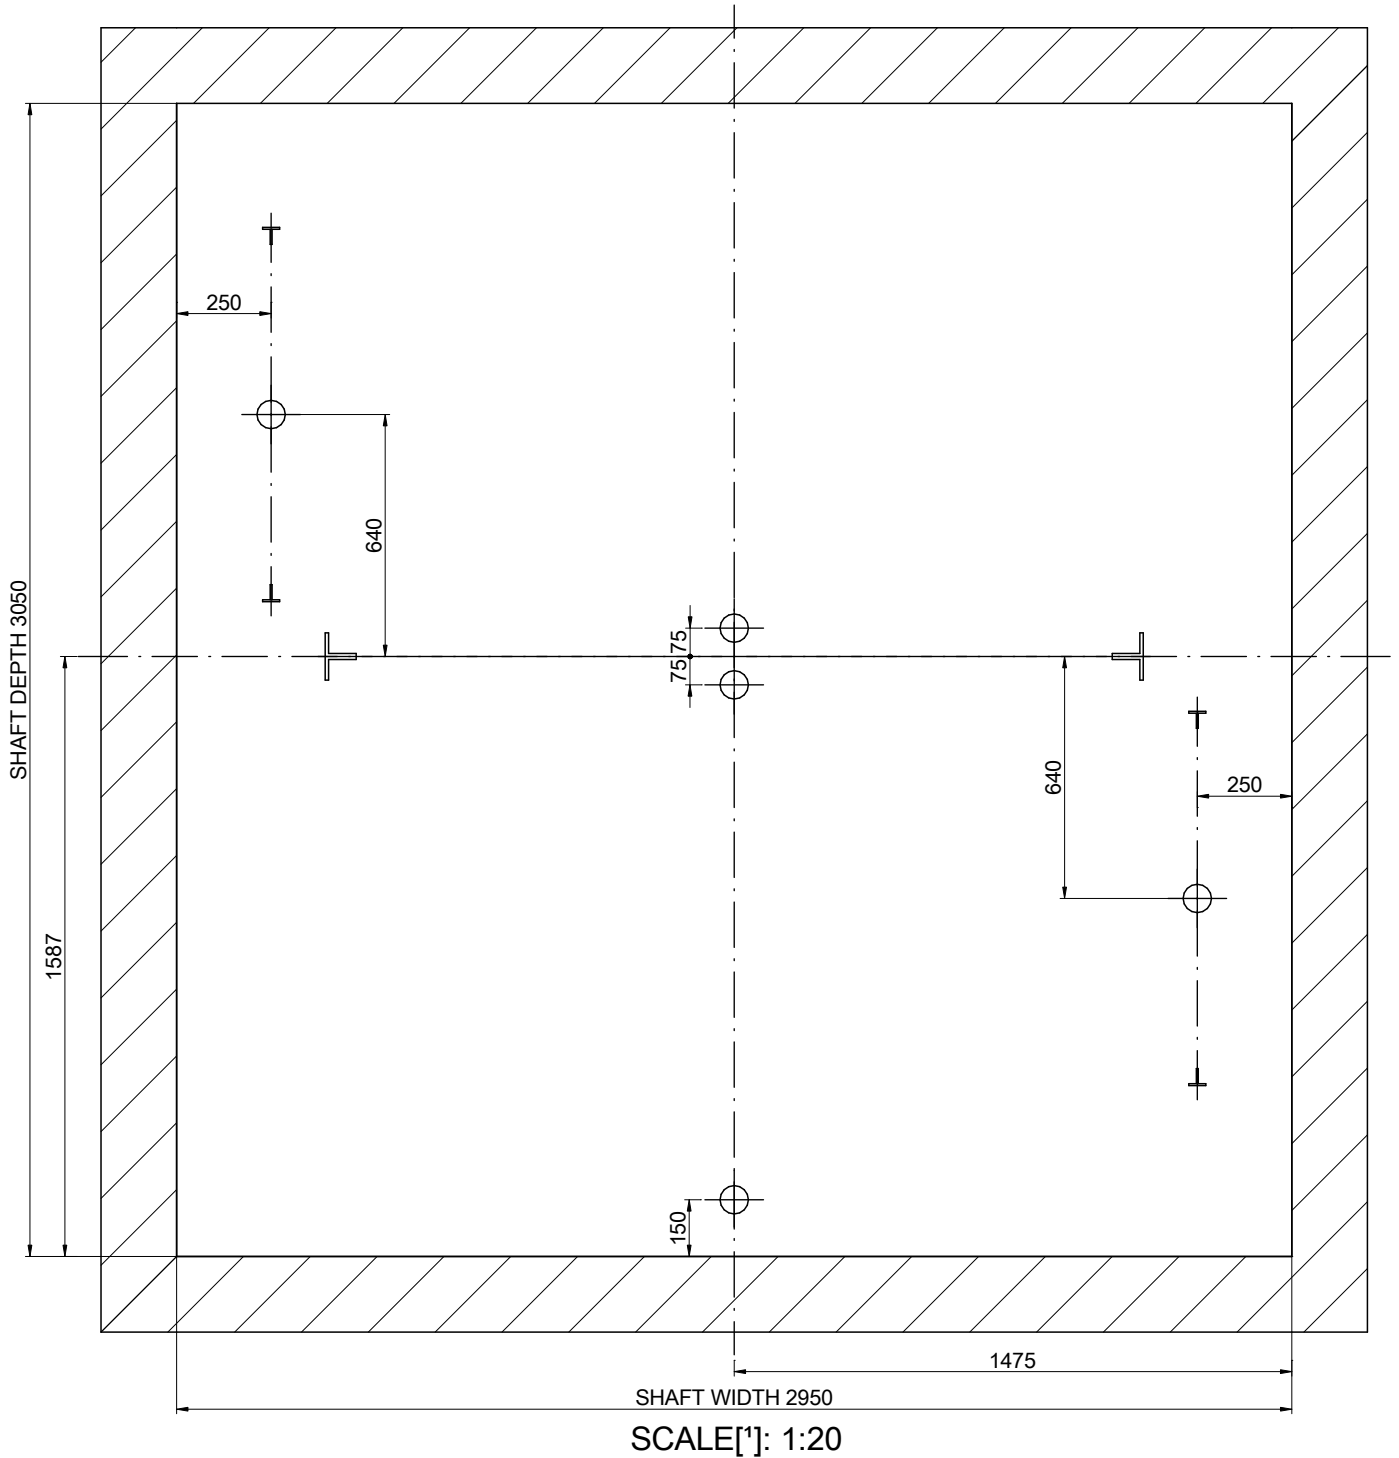

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	4/8		
MODEL LIFT:				REFERENCE:	
MP H				MPH_MONTACAMAS_2500C_EN	
CAPACITY: [N° PERSONS]				33	CLIENT: WORK SITUATION:
NOMINAL LOAD: [kg]				2500	
SPEED: [m/s]				0.5	
FREQUENCY: [Hz]				50	
TENSION: [V]				380V [Three-phase]	
MP LIFTS					


04B-MACHINE ROOM

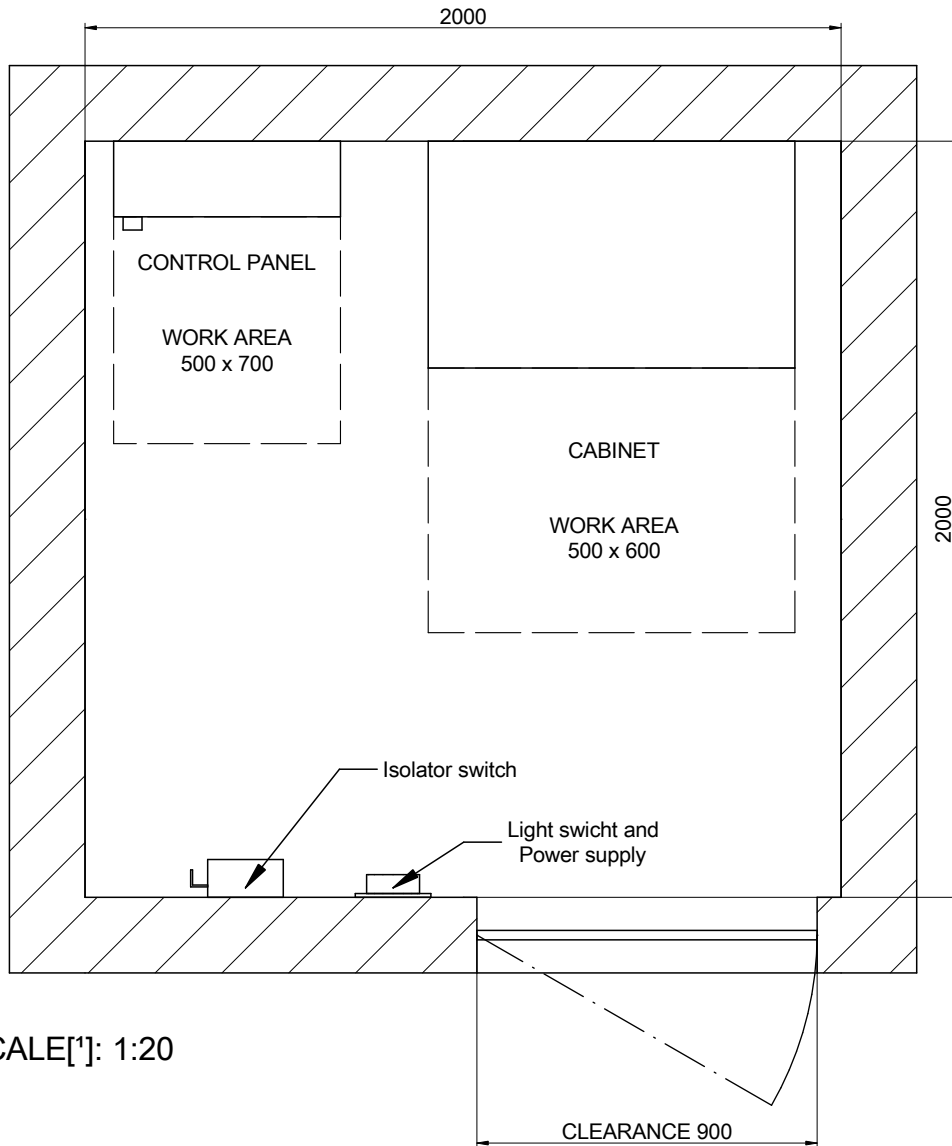


SCALE[*]: 1:20

Minimum machine room height: 2100 mm.
 [EN 81-20:2014 5.2.6.3.2.1]
 Minimum clearance door: 600x2000 mm.
 [EN 81-20:2014 5.2.3.2 a)]

Machine room location:
 Machine room located in floor level:
 [3] Distance controller/shaft:
 Cylinder oil entrance location: 0

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	5/8	REFERENCE: MPH_MONTACAMAS_2500C_EN	
MODEL LIFT:				CLIENT: WORK SITUATION:	<p style="text-align: center; font-size: 2em; font-weight: bold;">MP LIFTS</p>
MP H					
CAPACITY: [N° PERSONS]		33			
NOMINAL LOAD: [kg]		2500			
SPEED: [m/s]		0.5			
FREQUENCY: [Hz]		50			
TENSION: [V]		380V [Three-phase]			

05-PIT LAYOUT

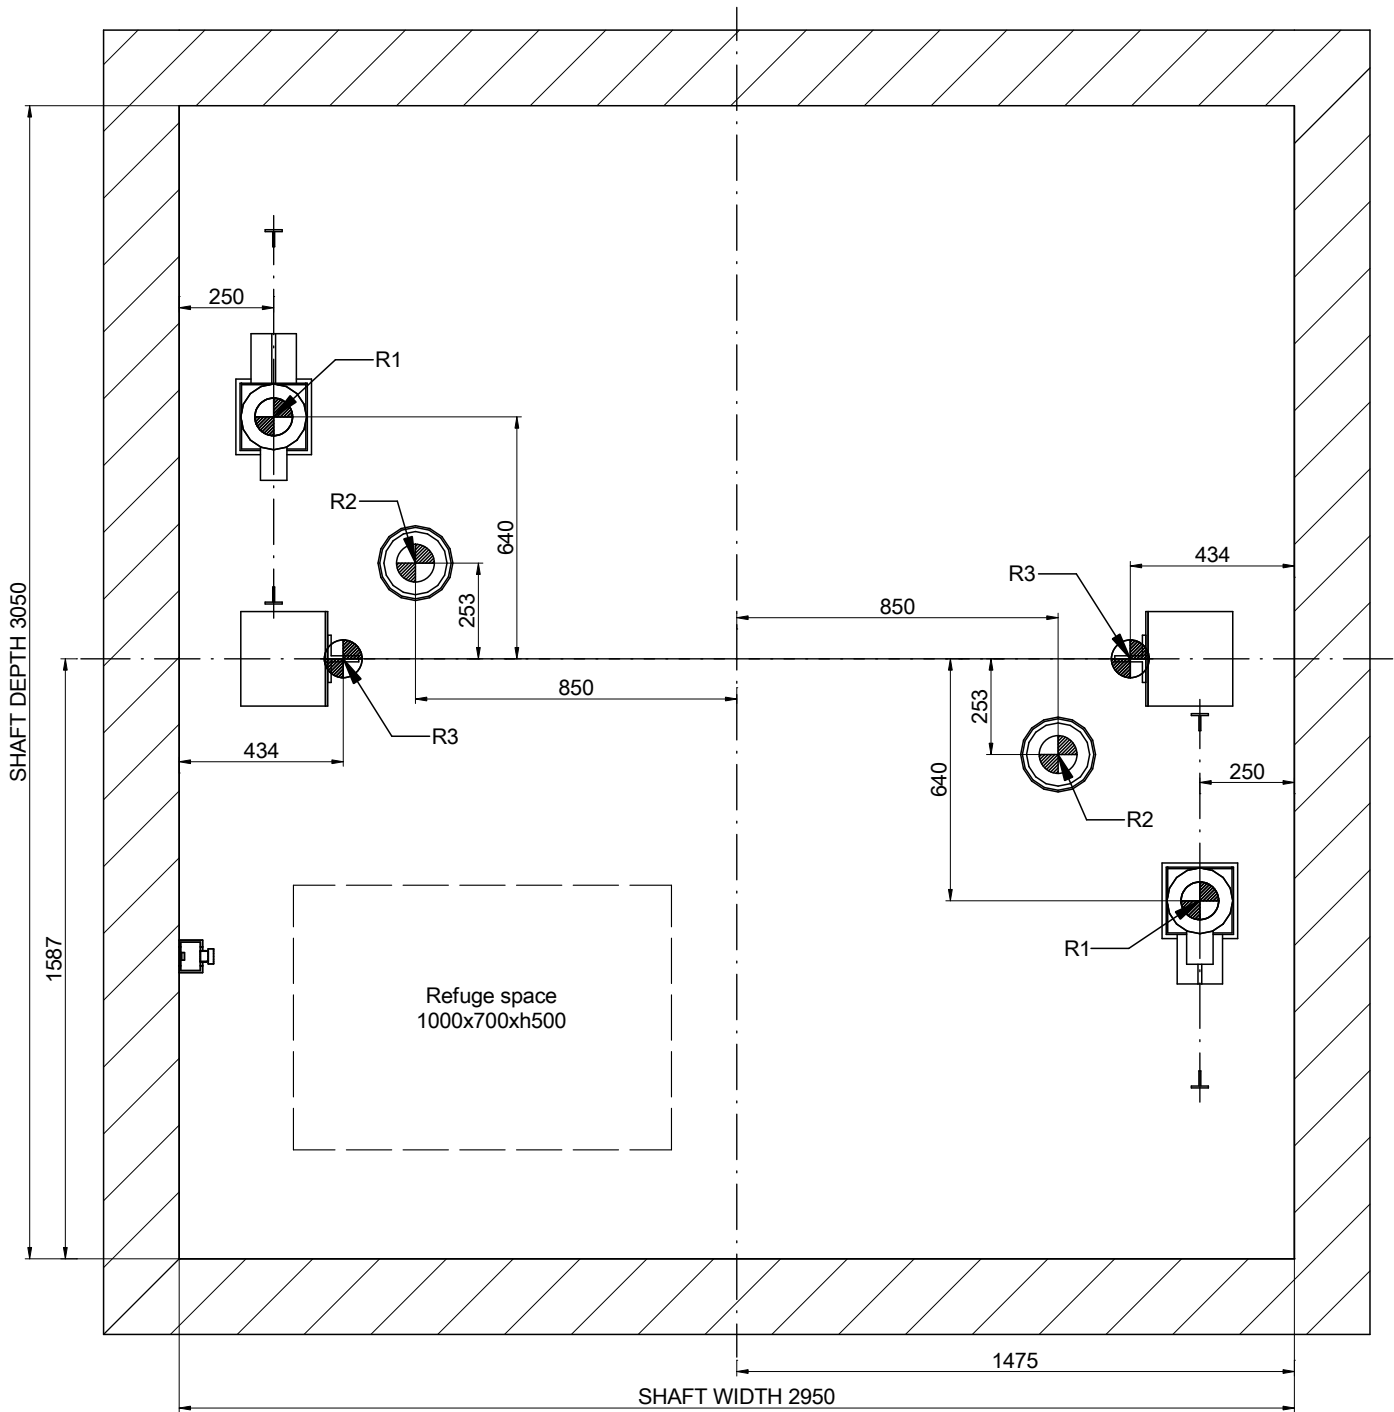



SCALE[*]: 1:20

REACTIONS [N] [max.]			
R1	64400	R2	82500
R3	64700		
Sx	5350	Sy	5550


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	6/8	REFERENCE: MPH_MONTACAMAS_2500C_EN	
MODEL LIFT:				CLIENT:	
MP H				WORK SITUATION:	
CAPACITY: [N° PERSONS]		33			
NOMINAL LOAD: [kg]		2500			
SPEED: [m/s]		0.5			
FREQUENCY: [Hz]		50			
TENSION: [V]		380V [Three-phase]		MP LIFTS	

06-DOOR HOLE DETAIL

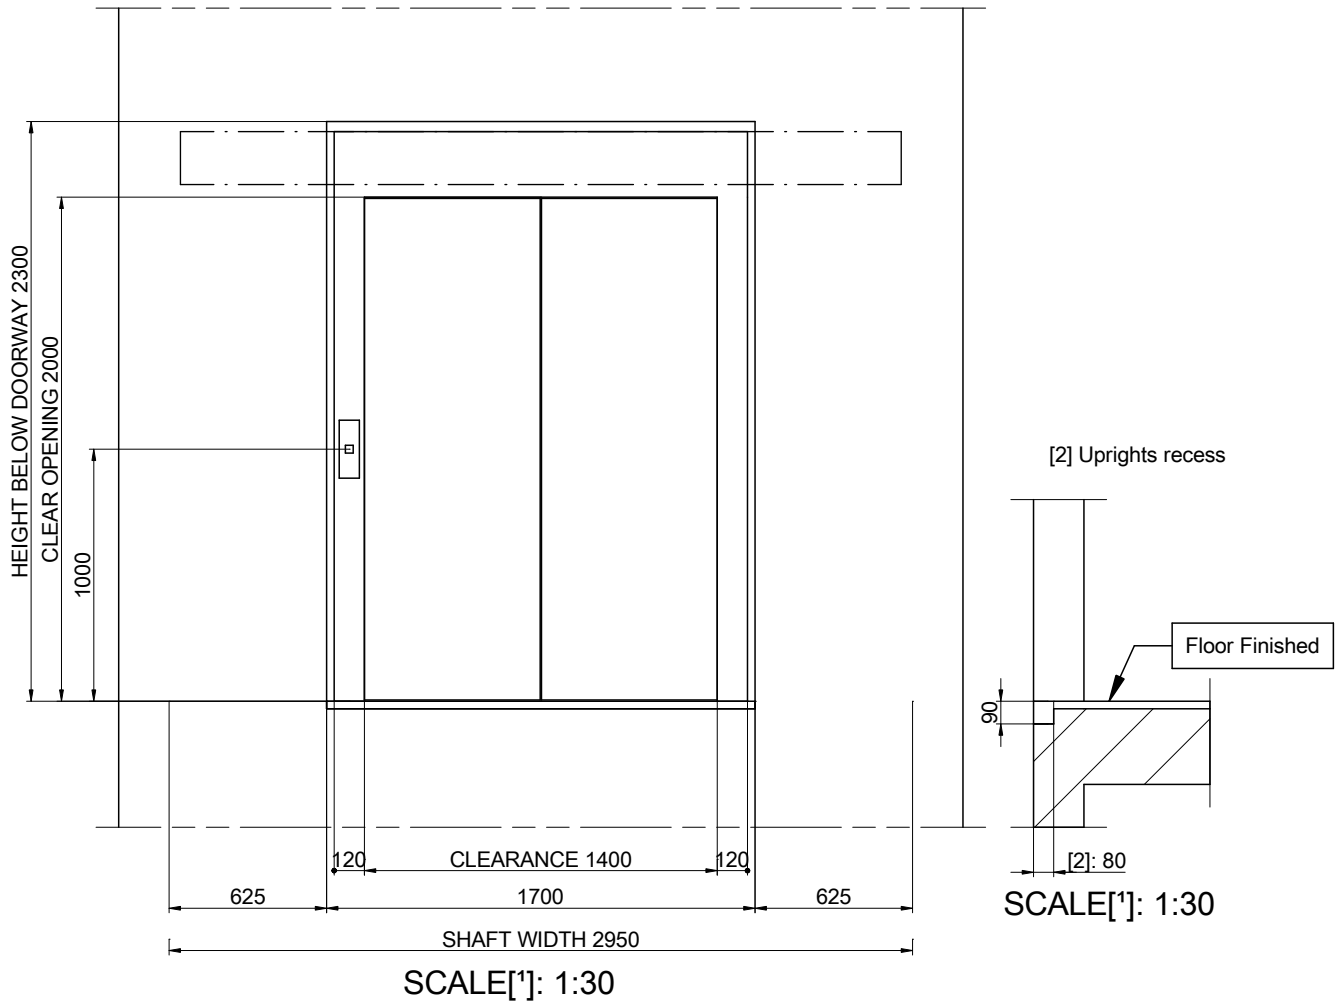


DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	7/8	REFERENCE: MPH_MONTACAMAS_2500C_EN	
MODEL LIFT:				CLIENT:	WORK SITUATION:
MP H					
CAPACITY: [N° PERSONS]			33	<h2>MP LIFTS</h2>	
NOMINAL LOAD: [kg]			2500		
SPEED: [m/s]			0.5		
FREQUENCY: [Hz]			50		
TENSION: [V]			380V [Three-phase]		

07-HEADROOM

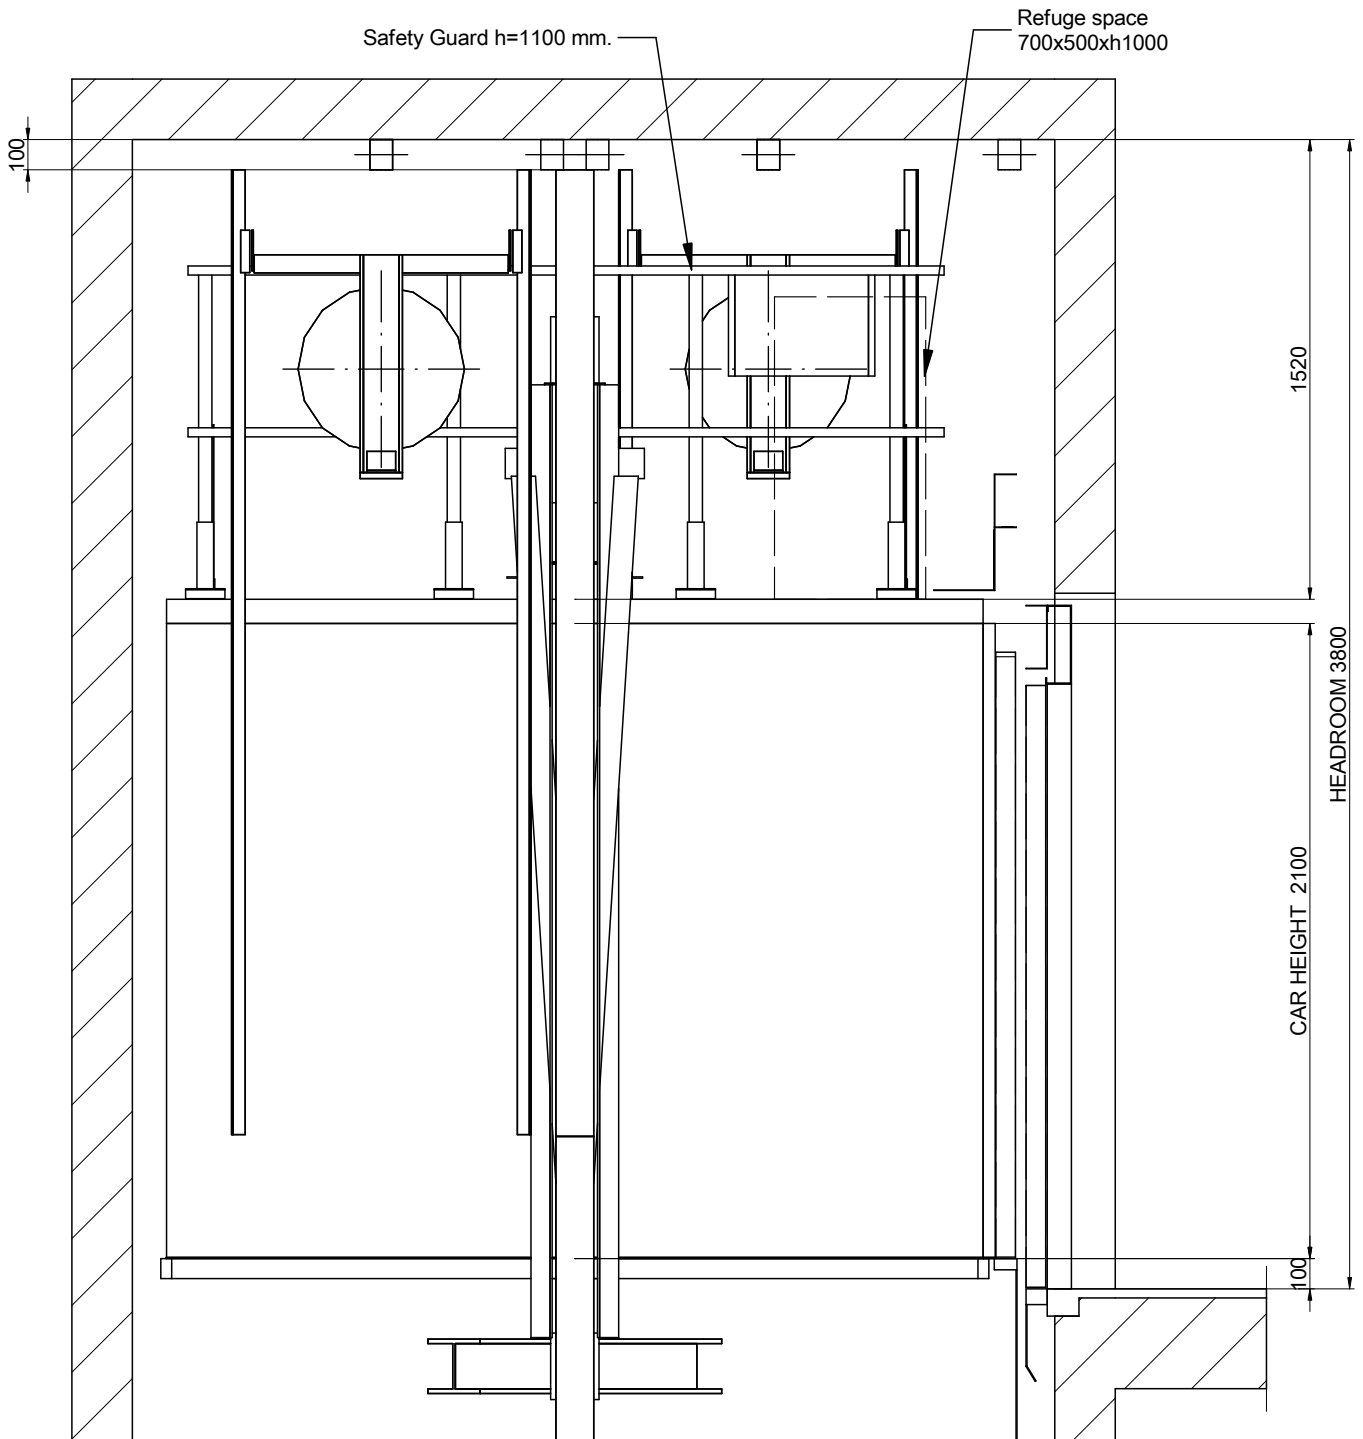

SCALE[*]: 1:25

DRAWING	DATE	REV.	SHEET	[*] Unbounded dimensions in drawings are indicative and not binding. REFERENCE: MPH_MONTACAMAS_2500C_EN	
MP	2017	00	8/8		
MODEL LIFT:				CLIENT:	
MP H					
CAPACITY: [N° PERSONS]		33		WORK SITUATION:	
NOMINAL LOAD: [kg]		2500			
SPEED: [m/s]		0.5			
FREQUENCY: [Hz]		50			
TENSION: [V]		380V [Three-phase]			
				MP LIFTS	