



01B-PLAN VIEW

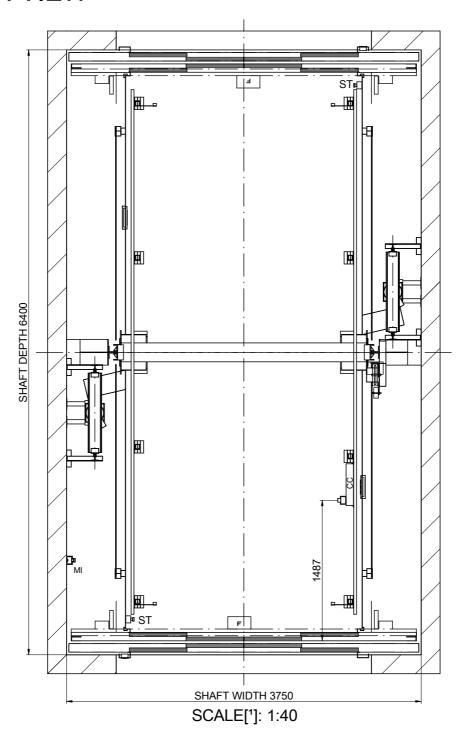

NOMENCLATURE CC: Car ceiling connection box ST: Stopping device MI: Inspection control station

DRAWING	DATE	REV.	SHEET	[1] Unbounded dimensions in drawings are indicative and not binding.	$\langle \rangle$
MP 2017 00 2/9		2/9	REFERENCE:		
MODEL LIFT:				MPH_MONTACOCHES_4000_EN	
	MP I	Н		0.075175	
CAPACITY: [N	CAPACITY: [Nº PERSONS] 53			CLIENT: WORK SITUATION:	
NOMINAL LOA	NOMINAL LOAD: [kg] 4000		4000		
SPEED: [m/s] 0.2			0.2		
FREQUENCY: [Hz] 50		50	MP LIFTS		
TENSION: [V] 380V [Three-phase]		ee-phase]	IVIFLIFIS		

02-SIDE VERTICAL SECTION

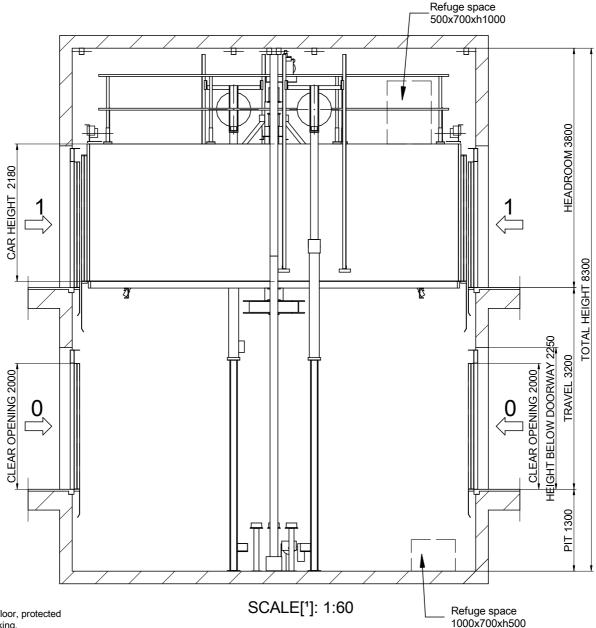


Flat and levelled floor, protected against water leaking.
[EN81-20:2014 5.2.1.9]
Foresee pit access device
[EN81-20:2014 5.2.2.4]
Stop device
[EN81-20:2014 5.2.1.5.1. a]
Inspection control station.
[EN81-20:2014 5.2.1.5.1. b]
Power supply
[EN81-20:2014 5.2.1.5.1. c]

Light swicht commuted with the cabinet. [EN81-20:2014 5.2.1.5.1. d]

DRAWING	DATE	REV.	SHEET	[1] Unbounded dimensions in drawings are indicative and not binding.	\wedge
MP	2017	00	3/9	REFERENCE:	
MODEL LIFT:				MPH_MONTACOCHES_4000_EN	
MP H				SUELIE STATES	
CAPACITY: [N	CAPACITY: [N° PERSONS] 53			CLIENT: WORK SITUATION:	
NOMINAL LOA	NOMINAL LOAD: [kg] 4000		1000		
SPEED: [m/s] 0.2		0.2			
FREQUENCY: [Hz] 50		50	MP LIFTS		
TENSION: [V] 380V [Three-phase]		ee-phase]	IVIP LIFTS		

04-BEAM AND LIFTING HOOKS


POSITION OF REMOVABLE LIFTING HOOKS ABLE TO SUPPORT 3500 kg EACH ONE SUPPLIED BY CONSTRUCTOR (RECOMMENDED POSITION LOADHOOKS)

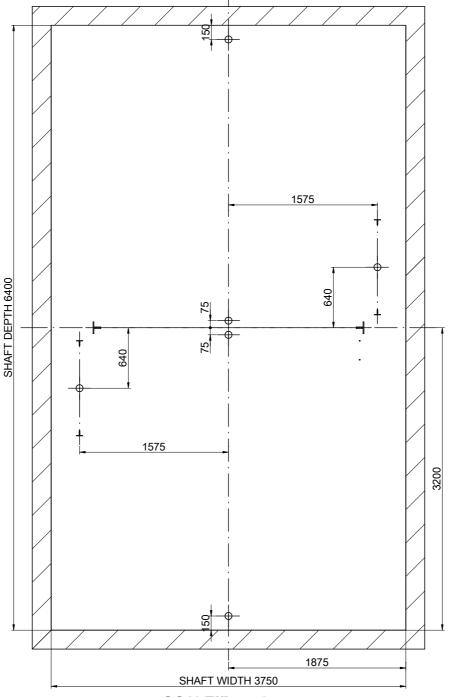

SCALE[1]: 1:40

DRAWING	DATE	REV.	SHEET	[1] Unbounded dimensions in drawings are indicative and not binding.	
MP 2017 00 4/9		4/9	REFERENCE:		
MODEL LIFT:				MPH_MONTACOCHES_4000_EN	
MP H					
CAPACITY: [N	CAPACITY: [Nº PERSONS] 53			CLIENT: WORK SITUATION:	
NOMINAL LOA	NOMINAL LOAD: [kg] 4000		4000		
SPEED: [m/s] 0.2		0.2			
FREQUENCY: [Hz] 50		50	MP LIFTS		
TENSION: [V] 380V [Three-phase]		ee-phase]	IVIF LII 13		


04B-MACHINE ROOM

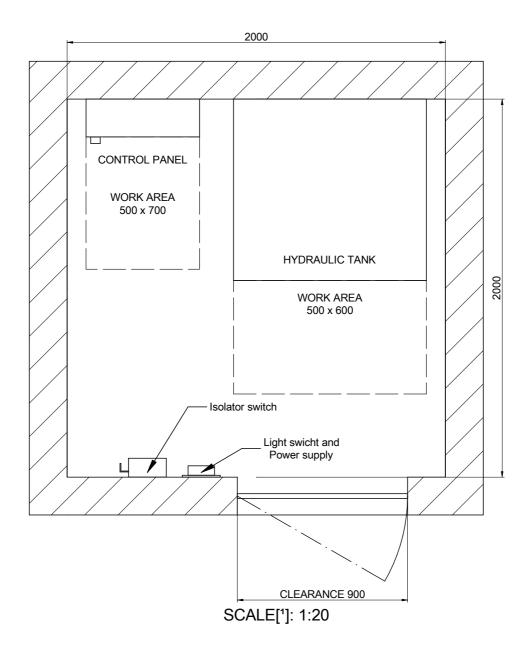


Minimum machine room height: 2100 mm. [EN 81-20:2014 5.2.6.3.2.1] Minimum clearance door: 600x2000 mm. [EN 81-20:2014 5.2.3.2 a]

Machine room location: Machine room located in floor level: [3] Distance controller/shaft: Cylinder oil entrance location: 0


DRAWING	DATE	REV.	SHEET	[1] Unbounded dimensions in drawings are indicative and not binding.	$\langle \rangle$
MP 2017 00 5/9		5/9	REFERENCE:		
MODEL LIFT:				MPH_MONTACOCHES_4000_EN	
MP H					
				CLIENT:	
CAPACITY: [N	CAPACITY: [Nº PERSONS] 53			WORK SITUATION:	
NOMINAL LOA	NOMINAL LOAD: [kg] 4000		4000		
SPEED: [m/s] 0.2			0.2		
FREQUENCY: [Hz] 50		50	MP LIFTS		
TENSION: [V] 380V [Three-phase]		ee-phase]	IVIP LIFTS		

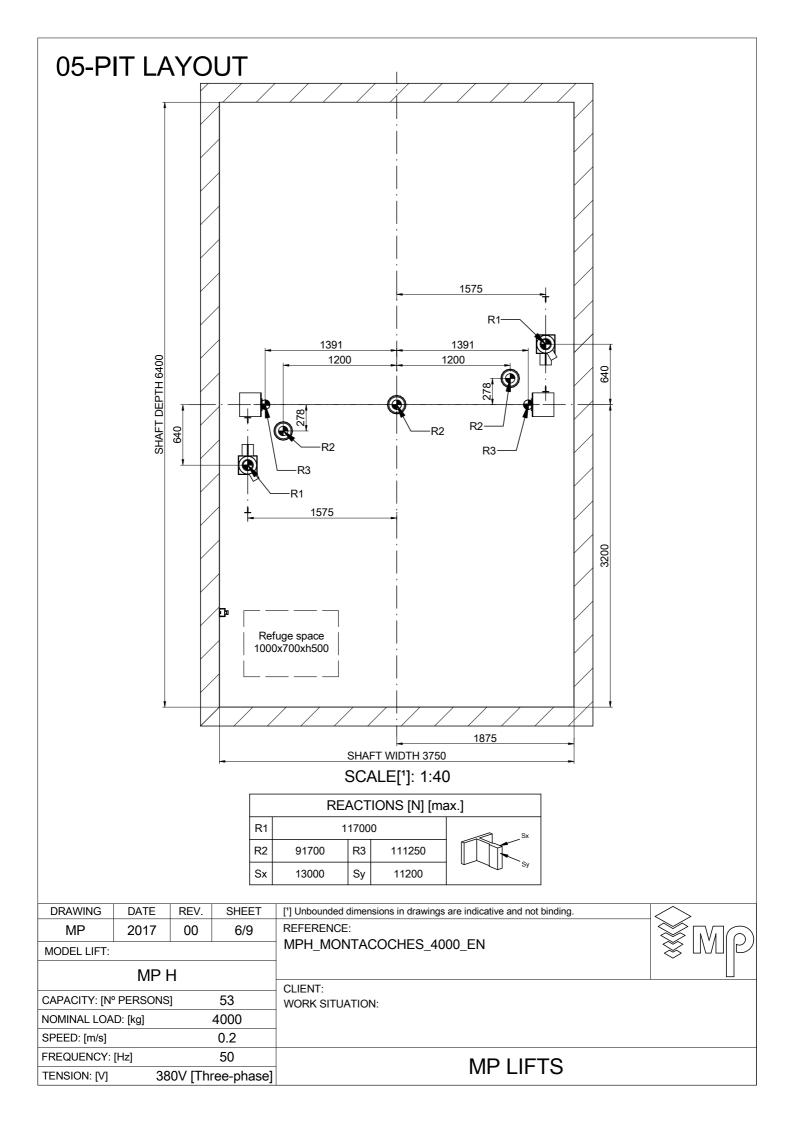

06-DOOR HOLE DETAIL

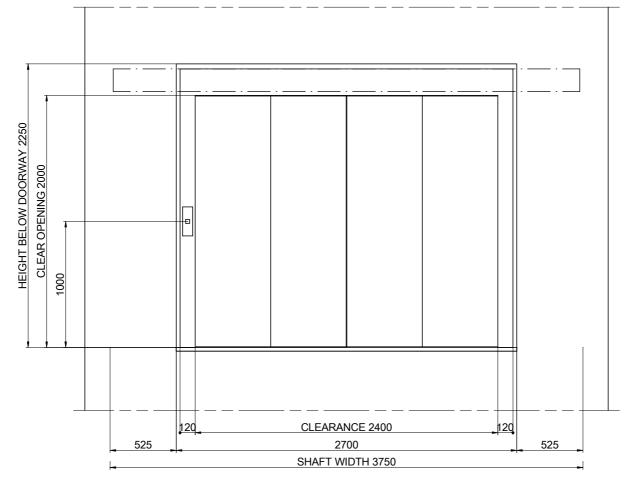


SCALE[1]: 1:30




DRAWING	DATE	REV.	SHEET	[1] Unbounded dimensions in drawings are indicative and not binding.	\triangle
MP	2017	00	7/9	REFERENCE:	
MODEL LIFT:				MPH_MONTACOCHES_4000_EN	
MP H					Ш
CAPACITY: [Nº PERSONS] 53			53	CLIENT: WORK SITUATION:	
NOMINAL LOA	NOMINAL LOAD: [kg] 4000		4000		
SPEED: [m/s] 0.2		0.2			
FREQUENCY: [Hz] 50		50	MP LIFTS		
TENSION: [V] 380V [Three-phase]		ee-phase]	IVIF LIFTS		

06B-DOOR HOLE DETAIL

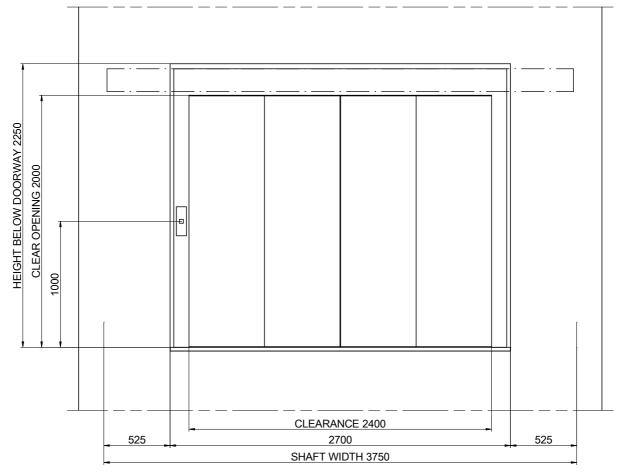


180 degrees SCALE[1]: 1:30



180 degrees SCALE[1]: 1:30

MP 2017 00 8/9 REFERENCE:	₩ D Z O
''' = '' '' '''	
MPH_MONTACOCHES_4000_EN	
MP H	
CAPACITY: [N° PERSONS] 53 CLIENT: WORK SITUATION:	
NOMINAL LOAD: [kg] 4000	
SPEED: [m/s] 0.2	
FREQUENCY: [Hz] 50 TENOION RG 2007/FThree phases	
TENSION: [V] 380V [Three-phase]	

07-HEADROOM

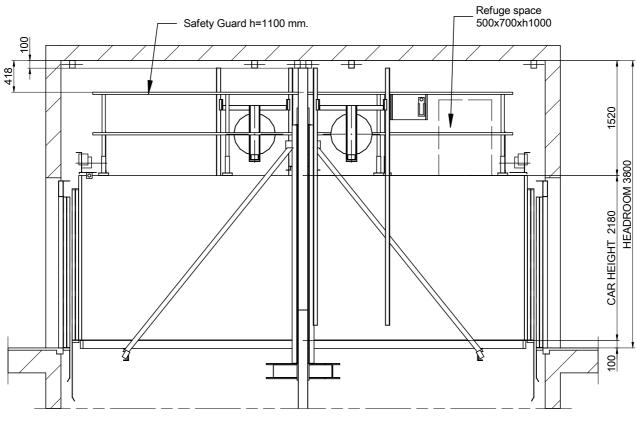

SCAL	F-111.	4.50
SU.AL	⊢I.I.	1.7

DRAWING	DATE	REV.	SHEET	[1] Unbounded dimensions in drawings are indicative and not binding.	
MP	2017	00	9/9	REFERENCE:	
MODEL LIFT:				MPH_MONTACOCHES_4000_EN	
MP H					
				CLIENT:	
CAPACITY: [No	CAPACITY: [N° PERSONS] 53			WORK SITUATION:	
NOMINAL LOA	NOMINAL LOAD: [kg] 4000		4000		
SPEED: [m/s] 0.2		0.2			
FREQUENCY: [Hz] 50		50	MP LIFTS		
TENSION: [V] 380V [Three-phase]		ee-phase]	IVIF LIFTS		